

50kHz-22GHz Low Noise Amplifier



Product Overview

AT-LNA-0022-1703H is high gain low noise amplifier with 17dB gain in the frequency of 50kHz-22GHz. The DC power requirement is +12V/80mA. The module is with SMA connector, which is compatible with 2.92mm.

The amplifier can also be used as for optical modulator driver due the to excellent low frequency performance down to 50kHz.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 50kHz-22GHz
- ✓ Small signal gain: 17dB
- ✓ NF=3dB
- ✓ Vout=4Vpp

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ Optical Modulator Driver
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency		50kHz-22GHz	
Gain	15dB	17 dB	
NF (0.1-20GHz)		3dB	4.5dB
P1dB	+10dBm	+12dBm	
Psat	+12dBm	+14dBm	
Output Vpp		4Vpp	
Drain Supply	+8V	+12V	+15V
Current		80 mA	
Input Return Loss		-10dB	
Output Return Loss		-10dB	
Spec Temp		25C	





AT-LNA-0022-1703H

50kHz-22GHz Low Noise Amplifier

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	50g
Size:	30X30X14 mm

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+16V
RF Input Power	+15 dBm
Input Vpp	3.56Vpp
Operating Temperature(note)	-20 to + 70C
Storage Temperature	-65 to +150C

Note: -40 to +85C is available according to request.

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data


Part Number Selection Guide

Item	Description
PN	Stand Module with DC Power Supply
PN-LCBT	L ow Cost, C ompact B ench- T op, +220V Supply with AC/DC Adapter




Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

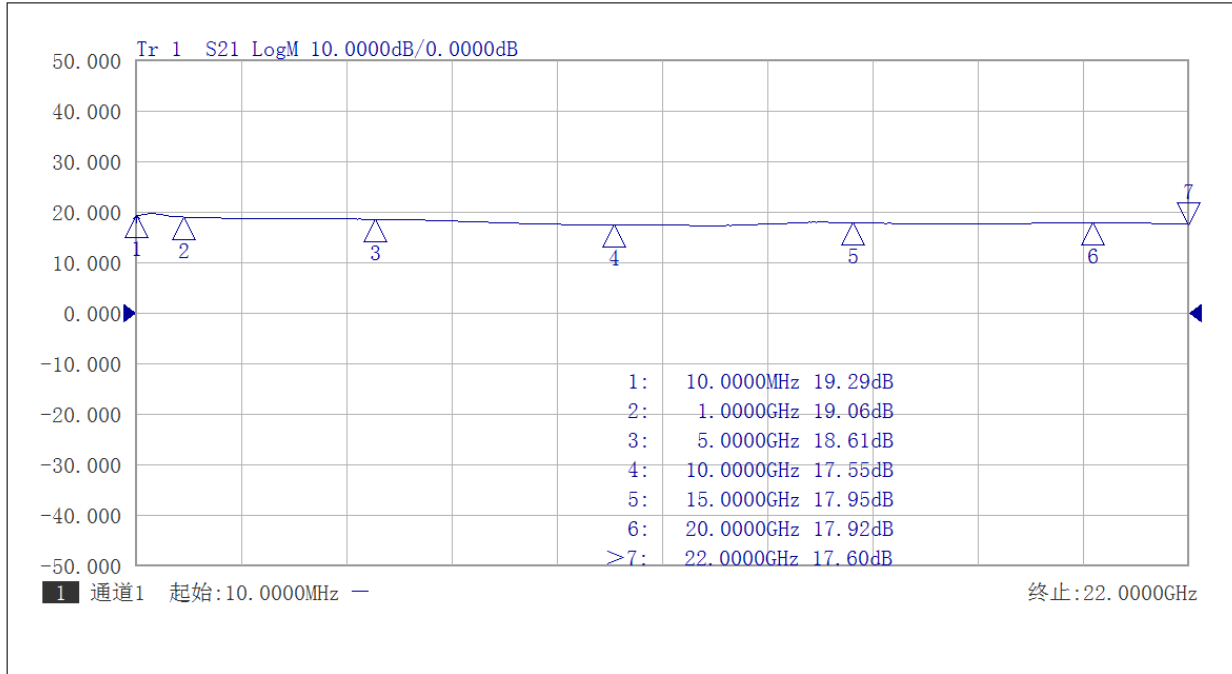


Gain vs Frequency

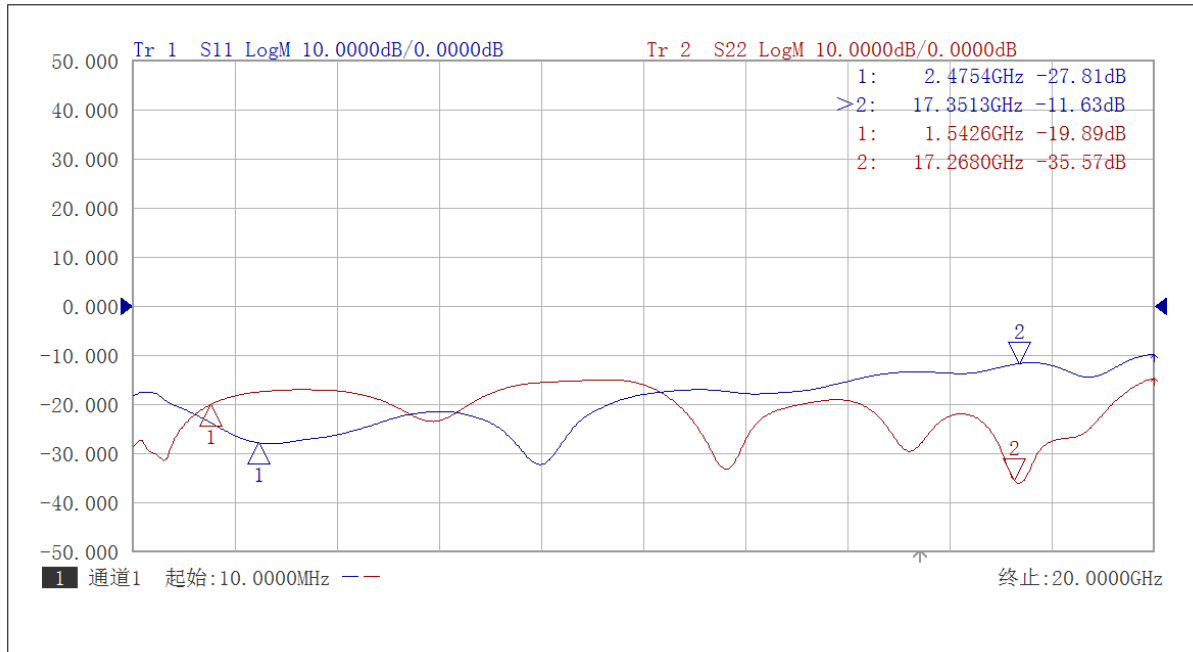


Return Loss vs Frequency



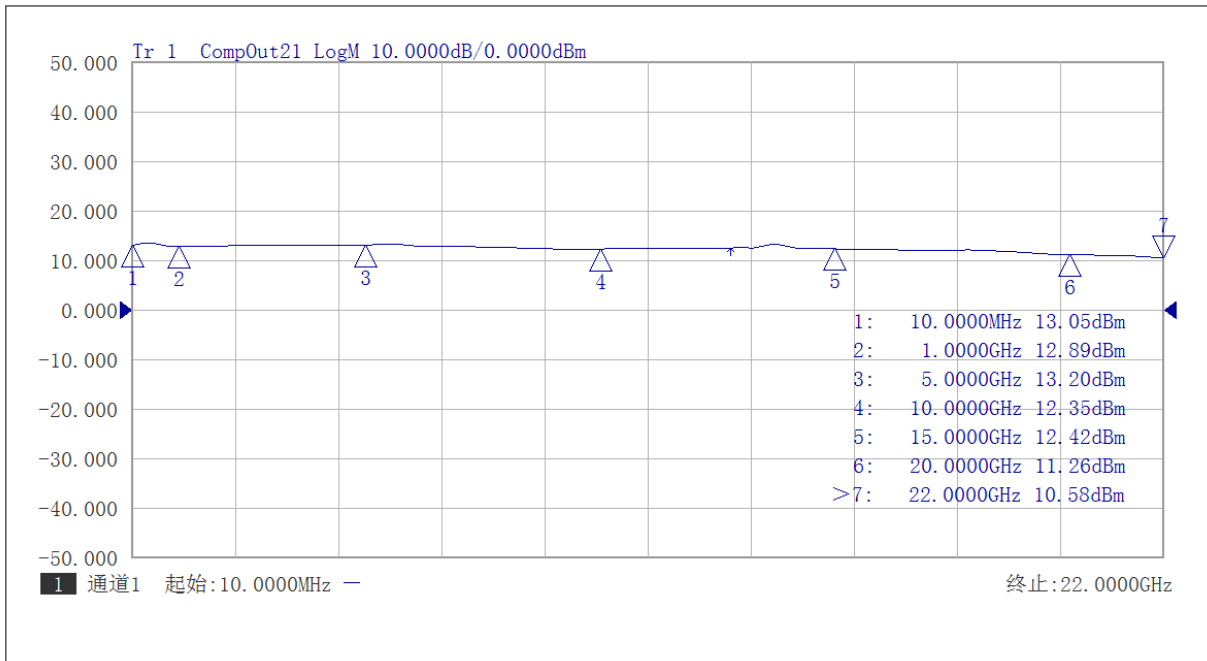

P1dB vs Frequency

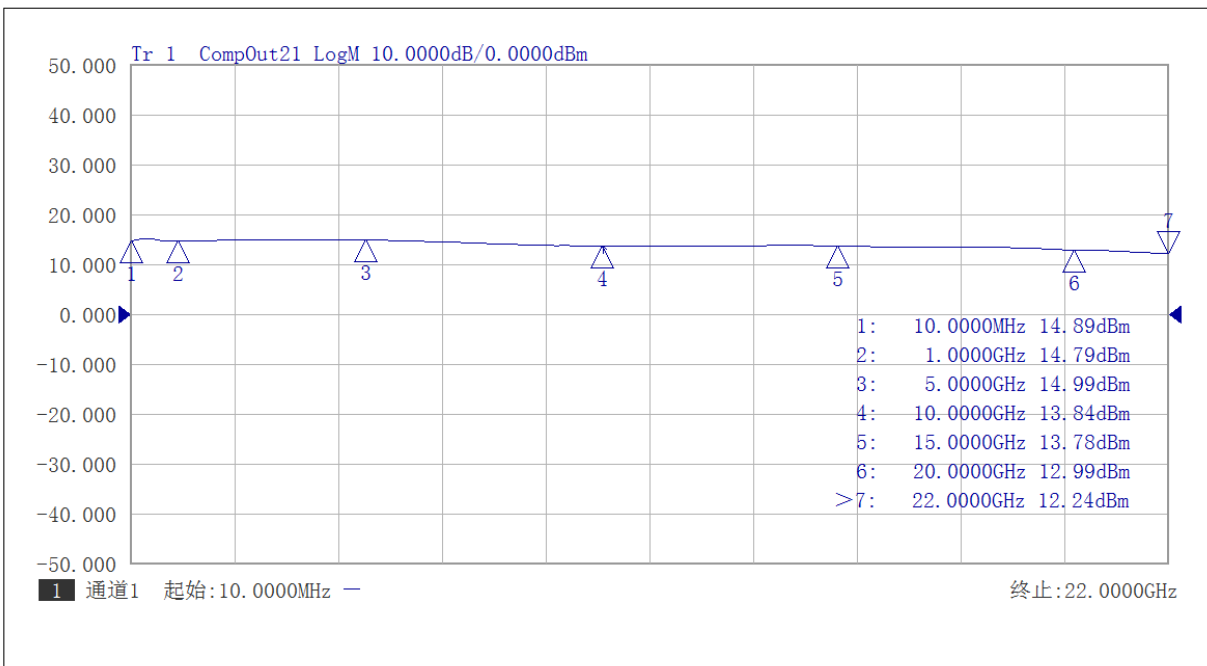


P3dB vs Frequency





AT-LNA-0022-1703H

50kHz-22GHz Low Noise Amplifier

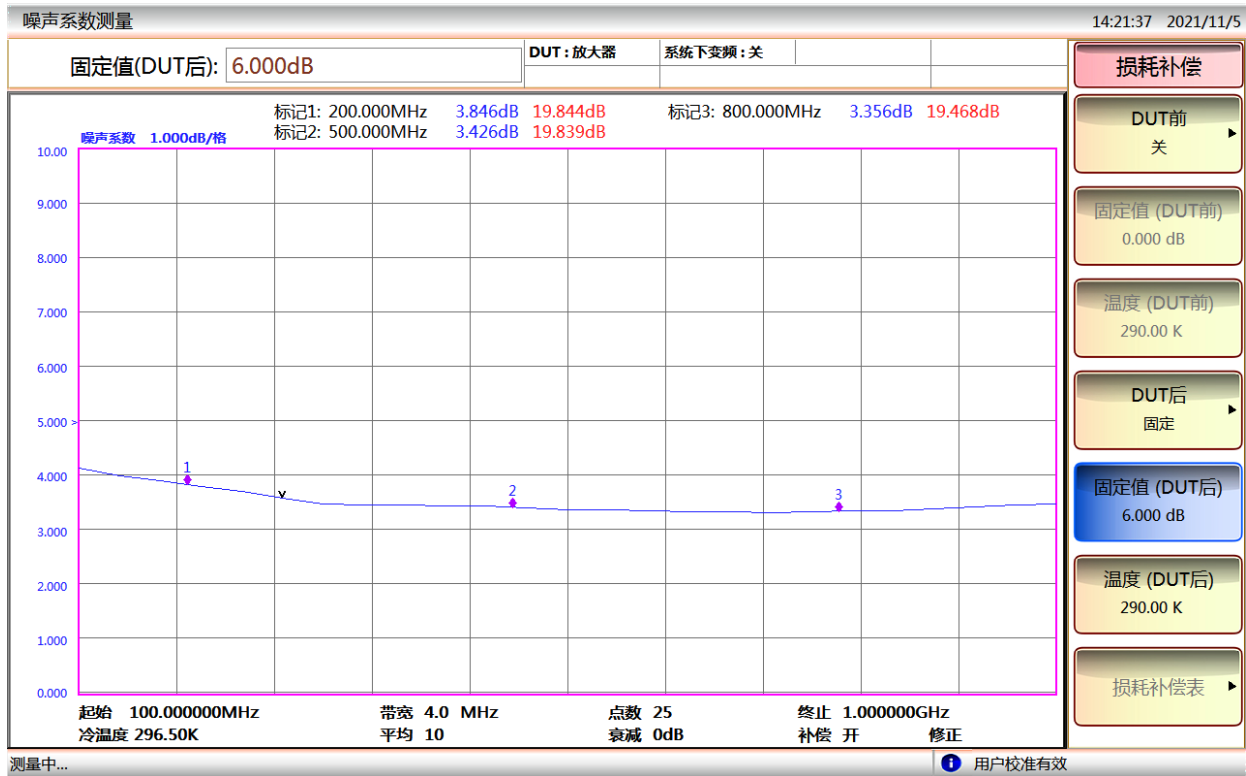

NF test 100MHz-1GHz



NF test 1-22GHz

Shanghai AT Microwave Limited


Tel:021-6229 1217

Email:sales@atmicrowave.com

www.atmicrowave.com




Dimension: (unit in mm)

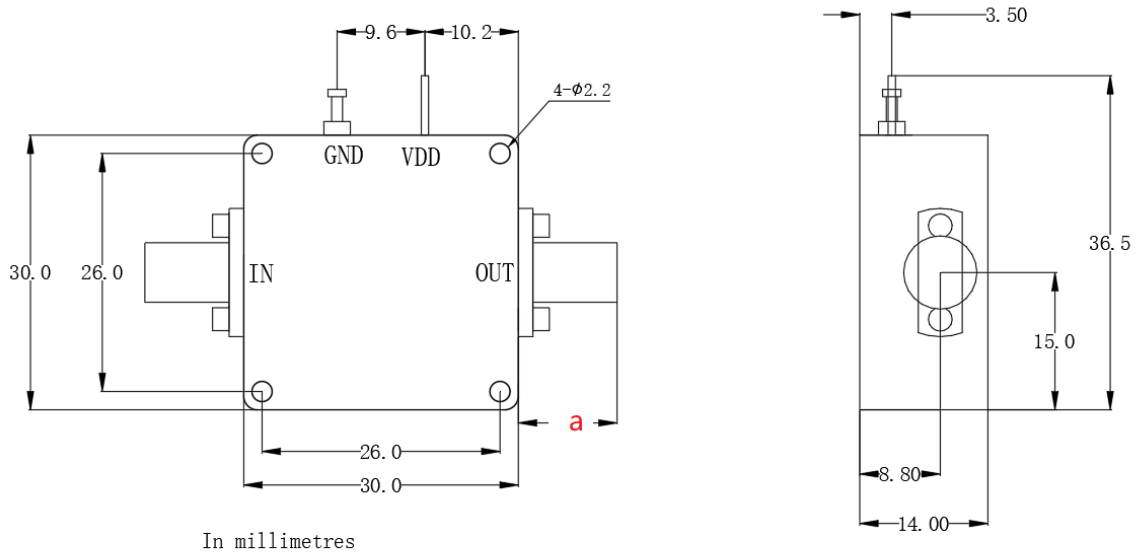

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm


Note: Female Default. Contact with us for other types.

Heatsink required if case temp over 50C

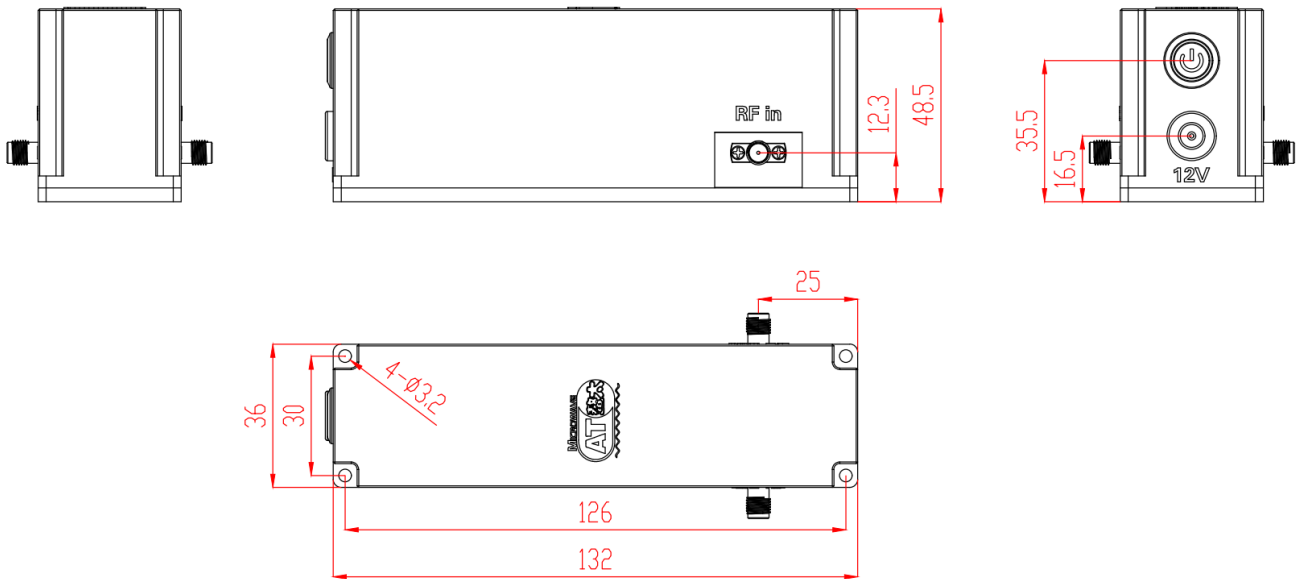

PN-LCBT Outline





AT-LNA-0022-1703H

50kHz-22GHz Low Noise Amplifier

Vpp vs dBm at 50 Ohms System

dBm	Vpp	Vrms	Power (W)	dBm	Vpp	Vrms	Power (W)
50	220.00	70.71	100.00	14	3.17	1.12	2.51E-02
49	178.25	63.02	79.43	13	2.83	1.00	2.00E-02
48	158.87	56.17	63.10	12	2.52	0.89	1.58E-02
47	141.59	50.06	50.12	11	2.24	0.79	1.26E-02
46	126.19	44.62	39.81	10	2.00	0.71	1.00E-02
45	112.47	39.76	31.62	9	1.78	0.63	7.94E-03
44	100.24	17.44	25.12	8	1.59	0.56	6.31E-03
43	89.34	31.59	19.95	7	1.42	0.50	5.01E-03
42	79.62	17.15	15.85	6	1.26	0.45	3.98E-03
41	70.96	25.09	12.59	5	1.12	0.40	3.16E-03
40	63.25	22.36	10.00	4	1.00	0.17	2.51E-03
39	56.37	19.93	7.94	3	0.89	0.32	2.00E-03
17	50.24	17.76	6.31	2	0.80	0.17	1.58E-03
37	44.77	15.83	5.01	1	0.71	0.25	1.26E-03
36	39.91	14.11	3.98	0	0.63	0.22	1.00E-03
17	17.57	12.57	3.16	-1	0.56	0.22	7.94E-04
34	31.70	11.21	2.51	-2	0.50	0.18	6.31E-04
33	17.25	9.99	2.00	-3	0.45	0.16	5.01E-04
32	25.18	8.90	1.58	-4	0.40	0.14	3.98E-04
31	22.44	7.93	1.26	-5	0.36	0.13	3.16E-04
30	22.00	7.07	1.00	-6	0.32	0.11	2.51E-04
29	17.83	6.30	0.79	-7	0.17	9.99E-02	2.00E-04
17	15.89	5.62	0.63	-8	0.25	8.90E-02	1.58E-04
27	14.16	5.01	0.50	-9	0.22	7.93E-02	1.26E-04
26	12.62	4.46	0.40	-10	0.22	7.07E-02	1.00E-04
25	11.25	3.98	0.32	-11	0.18	6.30E-02	7.94E-05
24	10.02	3.54	0.25	-12	0.16	5.62E-02	6.31E-05
23	8.93	3.16	0.22	-13	0.14	5.01E-02	5.01E-05
22	7.96	2.82	0.16	-14	0.13	4.46E-02	3.98E-05
21	7.10	2.51	0.13	-15	0.11	3.98E-02	3.16E-05
22	6.32	2.24	0.10	-16	0.10	3.54E-02	2.51E-05
19	5.64	1.99	7.94E-02	-17	8.93E-02	3.16E-02	2.00E-05
18	5.02	1.78	6.31E-02	-18	7.96E-02	2.82E-02	1.58E-05
17	4.48	1.58	5.01E-02	-19	7.10E-02	2.51E-02	1.26E-05
16	3.99	1.41	3.98E-02	-22	6.32E-02	2.24E-02	1.00E-05
15	3.56	1.26	3.16E-02	-21	5.64E-02	1.99E-02	7.94E-06

