


4-Ways Resistor Power Divider

DC-26.5GHz, SMA Female

2022-7-1

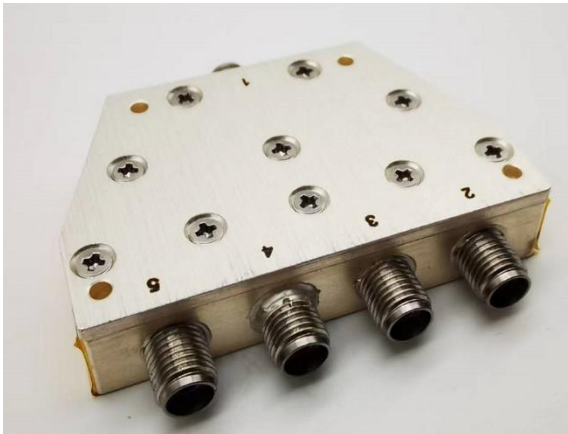

Product Overview

AT Microwave offers high performance and broadband power divider from DC-67GHz, with SMA, 2.92mm, 2.4mm and 1.85mm connectors.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Broadband Performance
- ✓ Low Insertion Loss
- ✓ Good Amplitude and Phase balance
- ✓ Good Return Loss

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Frequency Range		DC-26.5GHz	
Normal Power Splitting		-12 dB	
Extra Insertion Loss		-2.0dB	-3.3dB
Normal Phase Shift		0 Degree	
Amplitude Balance		+/-0.3dB	+/-0.5dB
Phase Balance		+/-3 Degree	+/-5 Degree
VSWR		-10dB	
Isolation	6dB	10dB	
CW Power		1W	
Spec Temp		25C	





AT-RPD4-0026L

DC-26.5GHz Resistor Power Divider

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Aluminum
Finish	Painted
Weight	80g
Size:	See outline


Absolute Maximum Ratings Table

Parameter	Value
RF Input Power CW	1W
Operating Temperature(note)	-40 to + 85C
Storage Temperature	-65 to +125C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.






AT-RPD4-0026L

DC-26.5GHz Resistor Power Divider

Test Data (25C)

Please note that test curves will vary slightly from unit to unit.

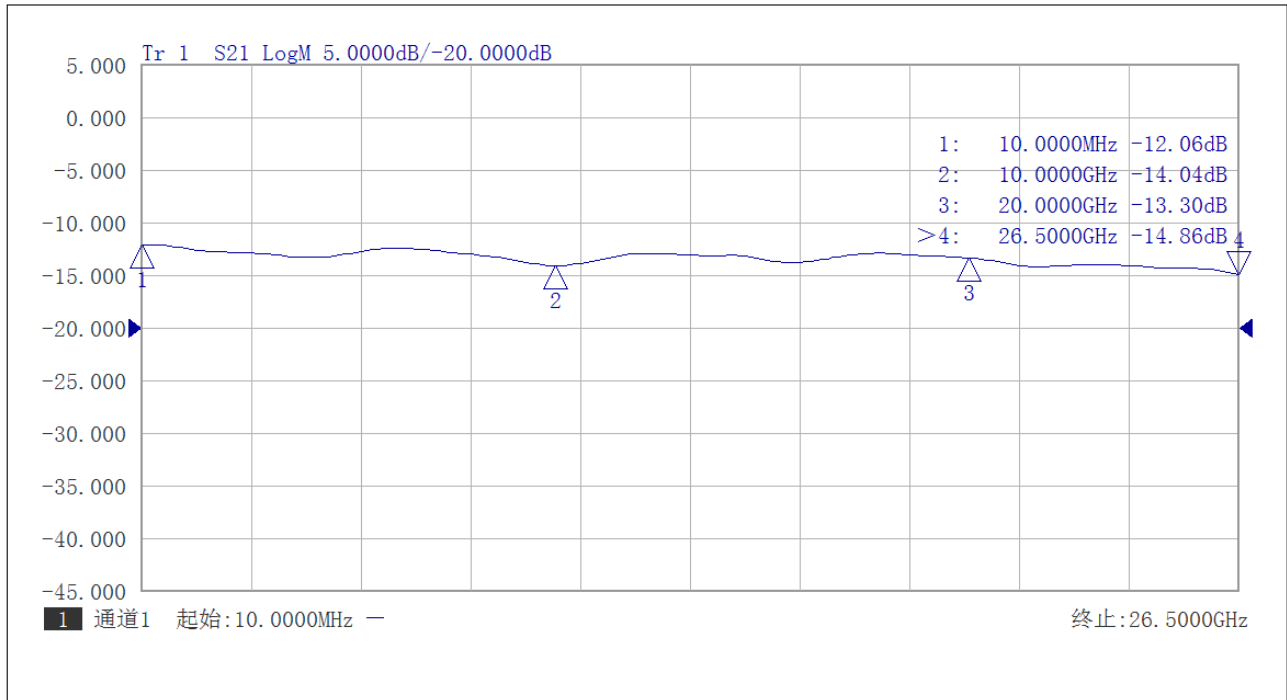

Insertion Loss vs Frequency



Dimension: (unit in mm)

