


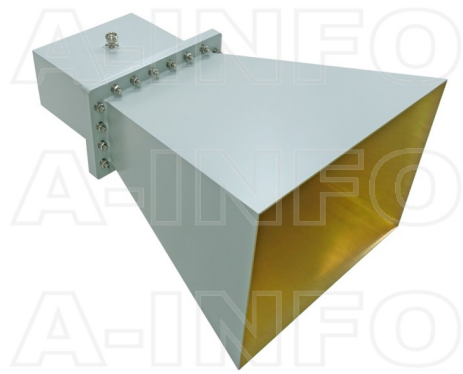

LB-1150-10-C-7/16F Standard Gain Horn Antenna 0.64-0.96GHz 10dB Gain 7/16(DIN) Female

Standard Gain Horn Antenna Operating From 0.64GHz to 0.96GHz With a Nominal 10dB Gain With 7/16(DIN) Female Connector

Product Information

SKU	LB-1150-10-C-7/16F
-----	--------------------

Description

Standard Gain Horn Antenna LB-1150-10-C-7/16F, operating from 0.64 to 0.96GHz with a nominal 10dB gain and low VSWR 1.25:1 with 7/16(DIN) Female connector output. The model LB-1150-10-C-7/16F has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 800W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	0.64	Output Type	Coaxial
Frequency, Max (GHz)	0.96	Connector	7/16 DIN
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR1150	Mechanical Specification	
Gain, Typ (dBi)	10	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Typ (Deg.)	50	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	46	Size, W (mm)	535.8
Cross Pol. Isolation, Typ (dB)	30	Size, H (mm)	388
VSWR, Typ	1.25:1	Size, L (mm)	788
Impedance, (Ohm)	50	Weight, (kg)	12.5
Power Handling, CW, (W)	800		
Power Handling, Peak, (W)	3000		

Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	---	--------------	---

Outline Drawing


7/16(DIN) Female Output (P/N: LB-1150-10-C-7/16F)

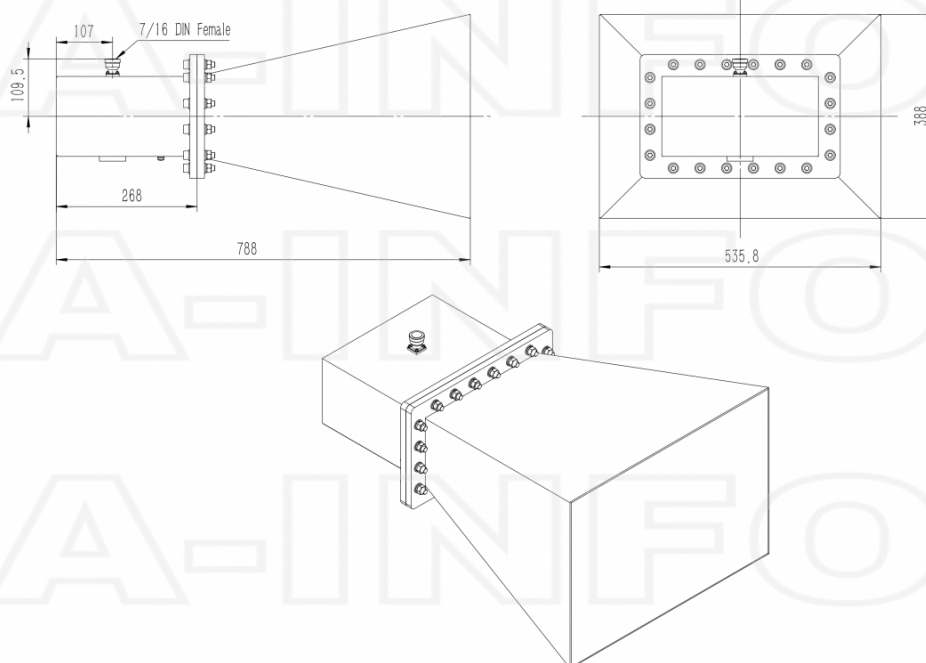

7/16(DIN) Female Output with Round Mounting Bracket (Option, P/N: LB-1150-10-C-MB)

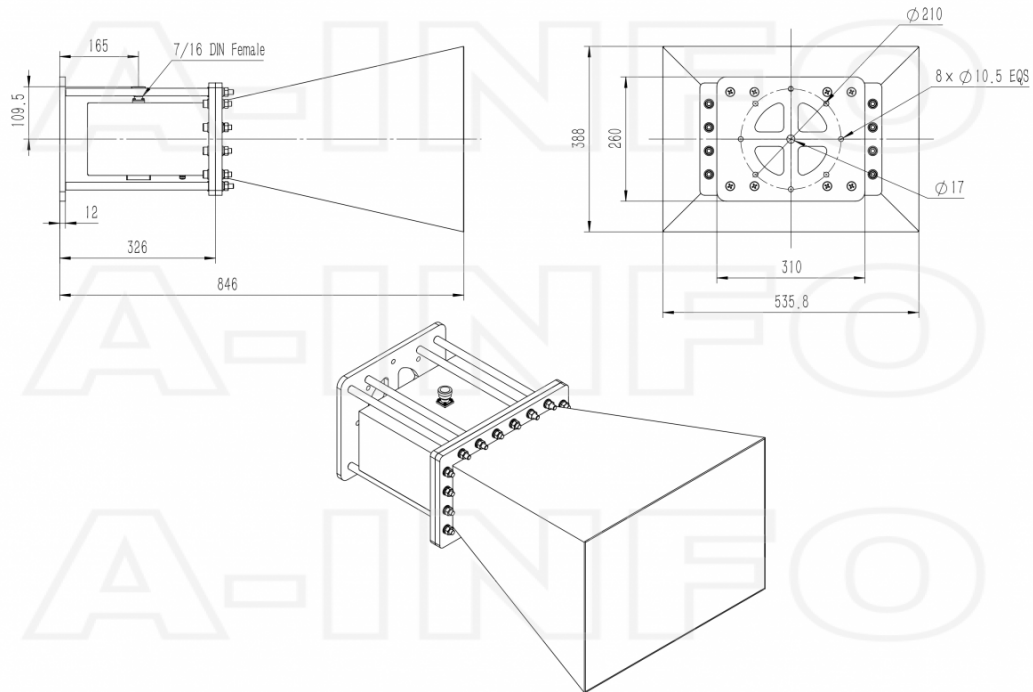


7/16(DIN) Female Output with L Type Mounting Bracket (Option, P/N: LB-1150-10-C-L)

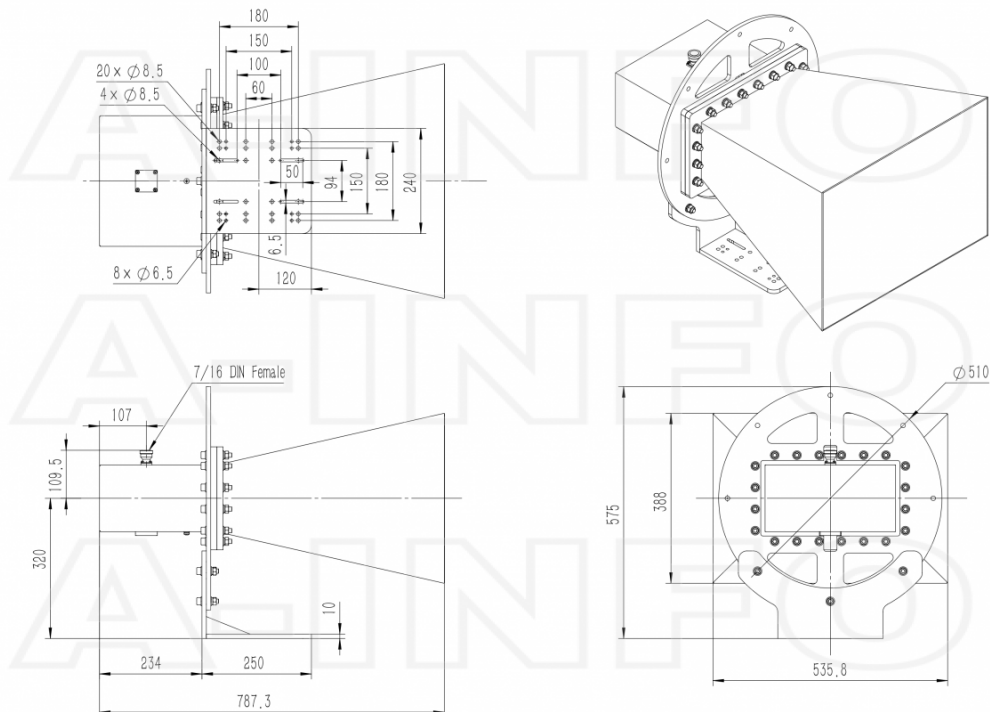


Typical Test Results

Gain

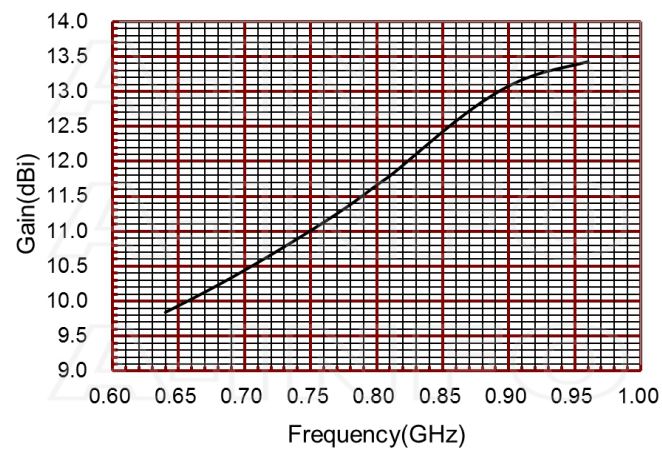


Antenna Factor

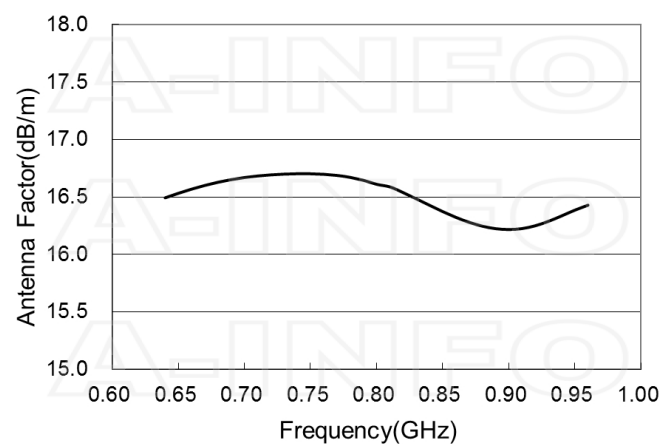




Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)	Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
0.64	9.84	16.49	0.81	11.79	16.59
0.65	9.94	16.53	0.82	11.95	16.54
0.66	10.03	16.57	0.83	12.11	16.48
0.67	10.13	16.60	0.84	12.27	16.43
0.68	10.23	16.63	0.85	12.43	16.37
0.69	10.34	16.65	0.86	12.58	16.32
0.70	10.44	16.67	0.87	12.72	16.28
0.71	10.55	16.68	0.88	12.85	16.25
0.72	10.66	16.69	0.89	12.97	16.22
0.73	10.78	16.70	0.90	13.08	16.22
0.74	10.89	16.70	0.91	13.17	16.22
0.75	11.01	16.70	0.92	13.24	16.25
0.76	11.13	16.70	0.93	13.29	16.29
0.77	11.25	16.69	0.94	13.34	16.34
0.78	11.38	16.67	0.95	13.38	16.38
0.79	11.52	16.65	0.96	13.43	16.43
0.80	11.66	16.61			

VSWR

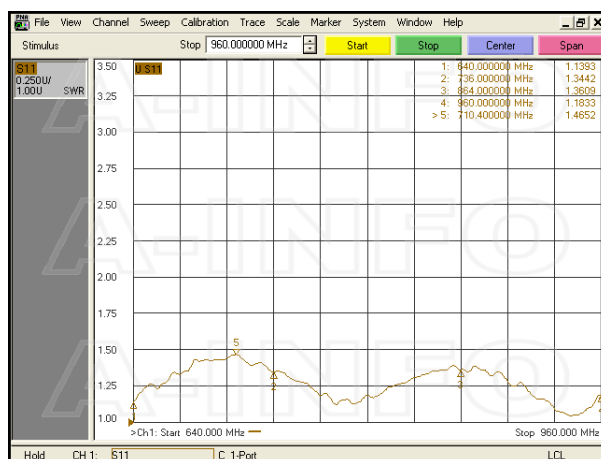

Pattern

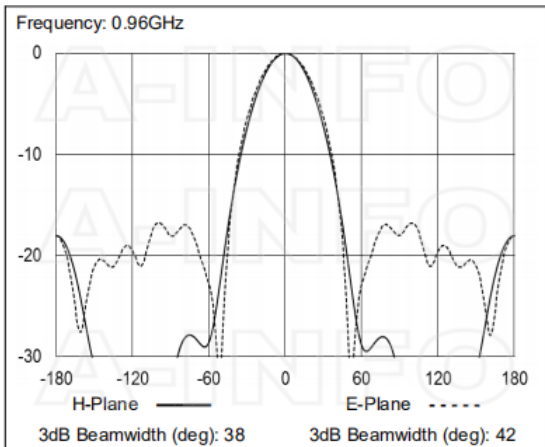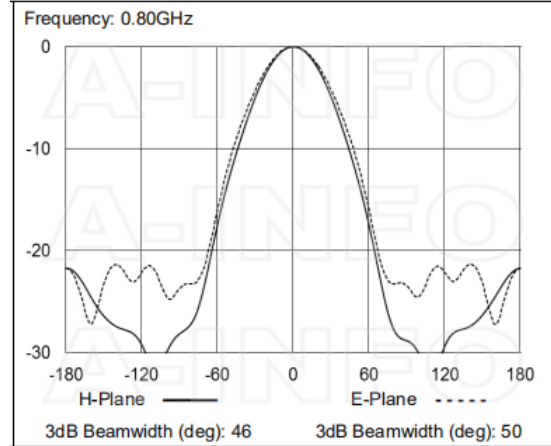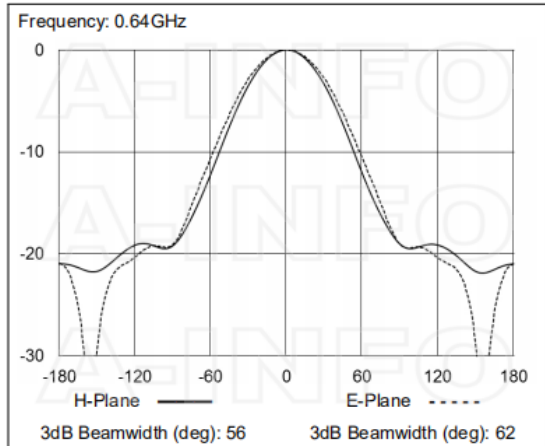

Related Products



LB-1150-10-C-MB Round Type
Mounting Bracket



LB-1150-10-C-L L type mounting
bracket

Similar Products




LB-1150-10-A Standard Gain
Horn Antenna 0.64-0.96GHz 10dB
Gain Rectangular Waveguide
Interface



LB-1150-10-ASPO Standard Gain
Horn Antenna 0.64-0.96GHz 10dB
Gain Rectangular Waveguide
Interface




LB-1150-10-C-NF Standard Gain
Horn Antenna 0.64-0.96GHz 10dB
Gain N Type Female




LB-1150-10-C-NFSPO Standard
Gain Horn Antenna 0.64-0.96GHz
10dB Gain N Type Female



LB-1150-10-C-SF Standard Gain
Horn Antenna 0.64-0.96GHz 10dB
Gain SMA Female



LB-1150-10-C-SFSPO Standard
Gain Horn Antenna 0.64-0.96GHz
10dB Gain SMA Female



LB-1150-10-C-7/16FSPO
Standard Gain Horn Antenna
0.64-0.96GHz 10dB Gain
7/16(DIN) Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-1150-10-c-7-16f-standard-gain-horn-antenna-0-64-0-96-ghz-10db-gain-7-16-din-female Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
--	---	--