


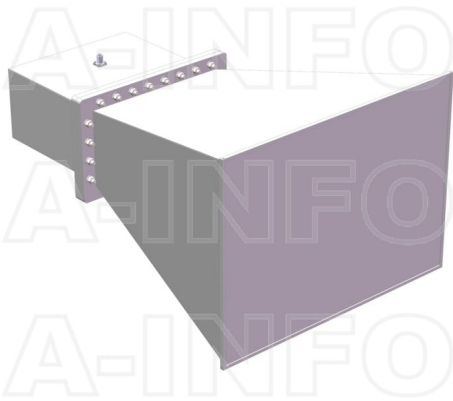

LB-1500-10-C-NFSPO Standard Gain Horn Antenna 0.49-0.75GHz 10dB Gain N Type Female

Standard Gain Horn Antenna Operating From 0.49GHz to 0.75GHz With a Nominal 10dB Gain With N Type Female Connector

Product Information

SKU	LB-1500-10-C-NFSPO
-----	--------------------

Description

Standard Gain Horn Antenna LB-1500-10-C-NFSPO, operating from 0.49 to 0.75GHz with a nominal 10dB gain and low VSWR 1.25:1 with N Type Female connector output. The model LB-1500-10-C-NFSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 500W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	0.49	Output Type	Coaxial
Frequency, Max (GHz)	0.75	Flange Type	Cover
Waveguide Type	Rectangular	Connector	N Type
Waveguide Size EIA WR	WR1500	Connector Gender	Female
Gain, Typ (dBi)	10	Mechanical Specification	
Polarization	Linear	Figure	C Type
3dB Beamwidth, E-Plane, Typ (Deg.)	50	Body Material	Al
3dB Beamwidth, H-Plane, Typ (Deg.)	46	Finish	Chemical Conversion Coating, Gray Paint
Cross Pol. Isolation, Typ (dB)	30	Size, W (mm)	714
VSWR, Typ	1.25:1	Size, H (mm)	520
Impedance, (Ohm)	50	Size, L (mm)	1030
Power Handling, CW, (W)	500	Weight, (kg)	23.3
Power Handling, Peak, (W)	3000		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


N-Female Output with Radome (Option, P/N: LB-1500-10-C-NFSPO, Outdoor Application)

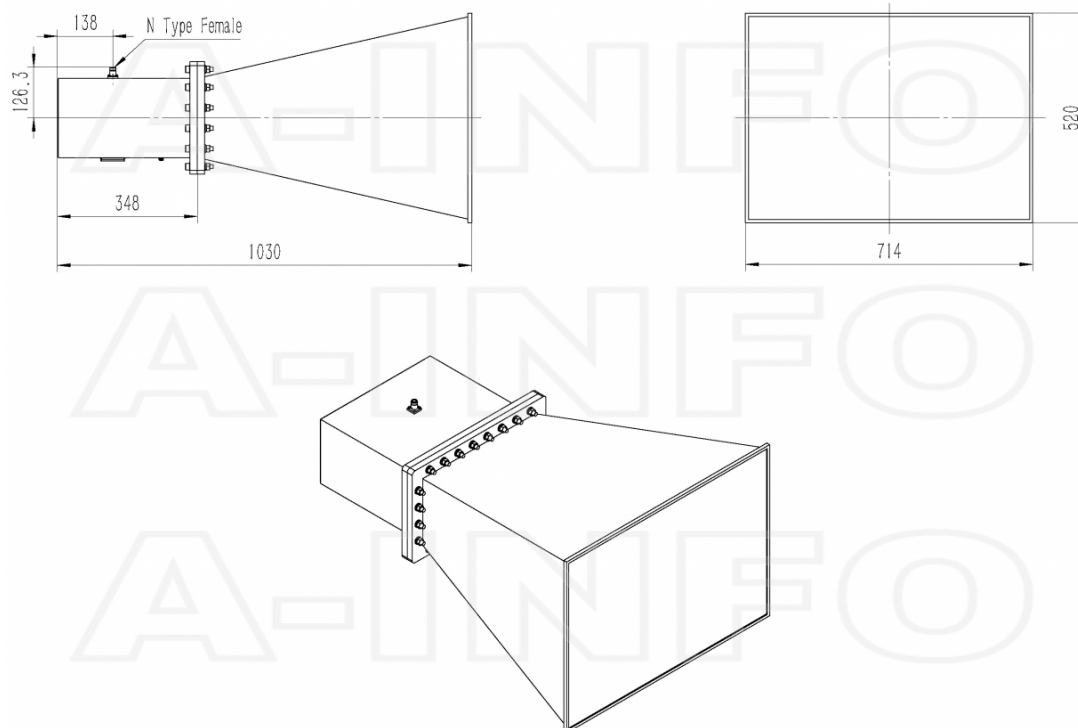

N-Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-1500-10-C-MB & LB-1500-10-C-NFSPO, Outdoor Application)

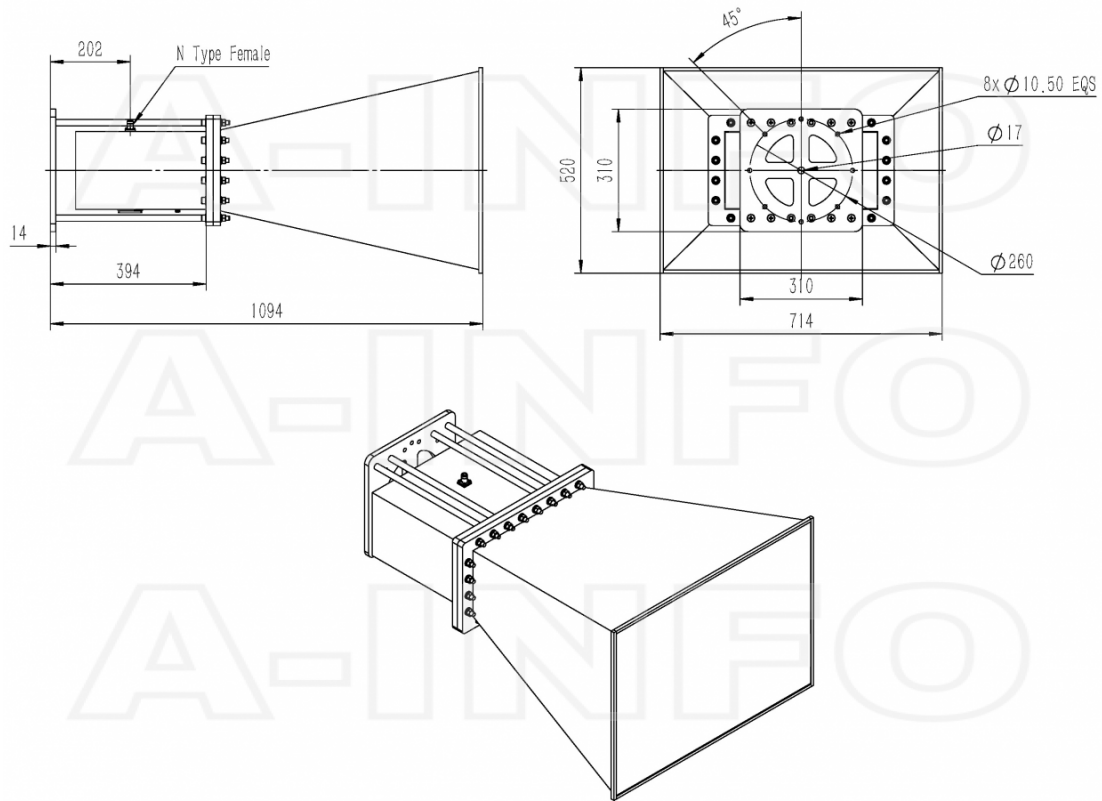


N-Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-1500-10-C-L & LB-1500-10-C-NFSPO, Outdoor Application)

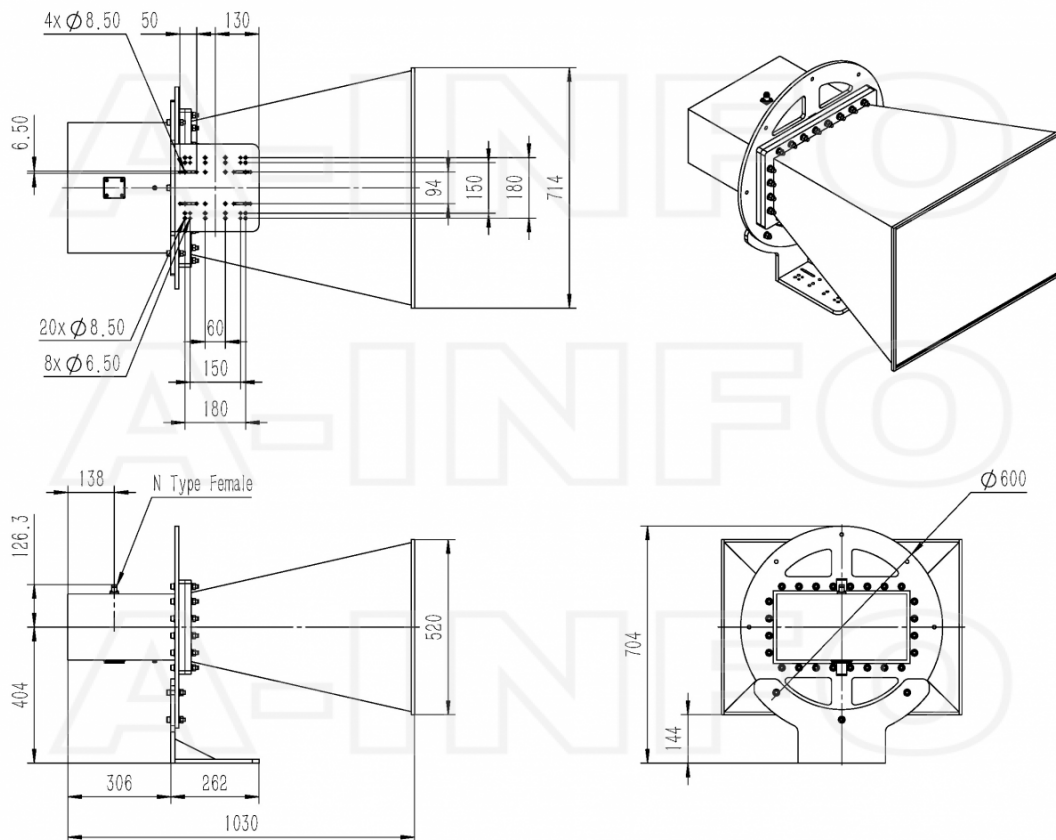


Typical Test Results

Gain

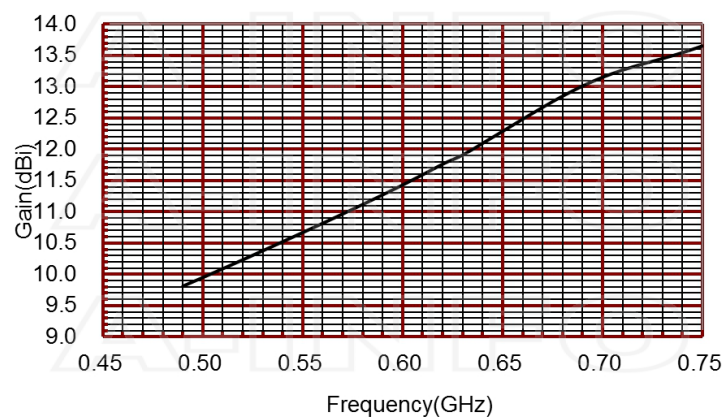


Antenna Factor

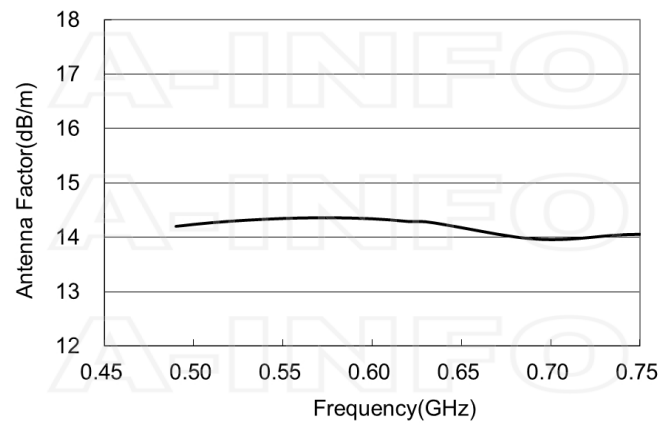




Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)	Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
0.49	9.81	14.20	0.63	11.91	14.29
0.50	9.95	14.24	0.64	12.10	14.24
0.51	10.09	14.27	0.65	12.29	14.18
0.52	10.23	14.30	0.66	12.48	14.12
0.53	10.38	14.32	0.67	12.67	14.06
0.54	10.52	14.33	0.68	12.85	14.01
0.55	10.67	14.35	0.69	13.01	13.97
0.56	10.82	14.36	0.70	13.15	13.96
0.57	10.97	14.36	0.71	13.27	13.97
0.58	11.12	14.36	0.72	13.36	13.99
0.59	11.27	14.35	0.73	13.45	14.02
0.60	11.43	14.34	0.74	13.55	14.05
0.61	11.59	14.32	0.75	13.65	14.06
0.62	11.76	14.29			

VSWR

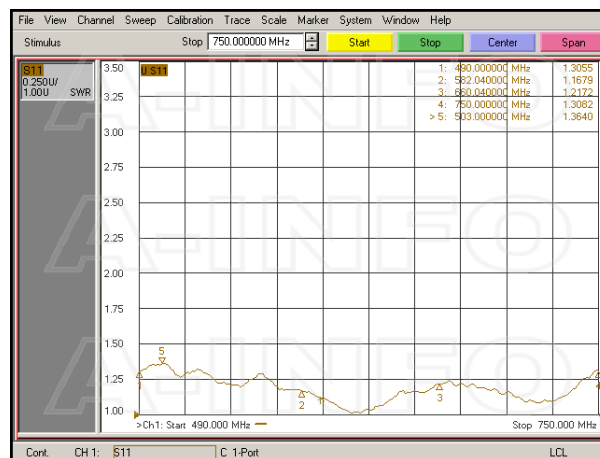

Pattern

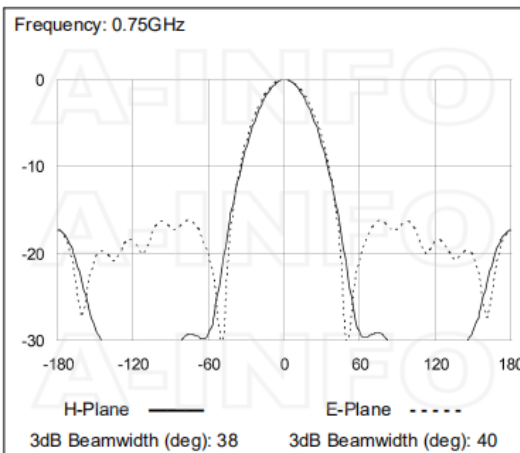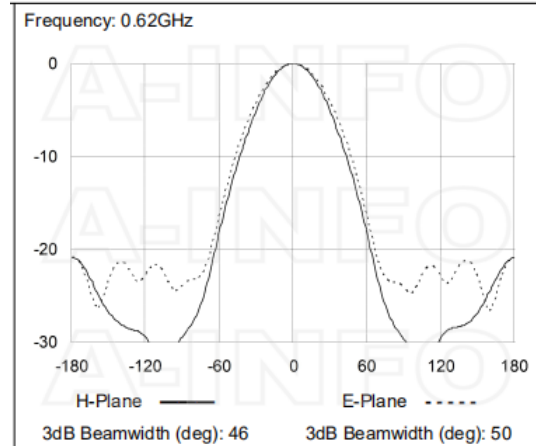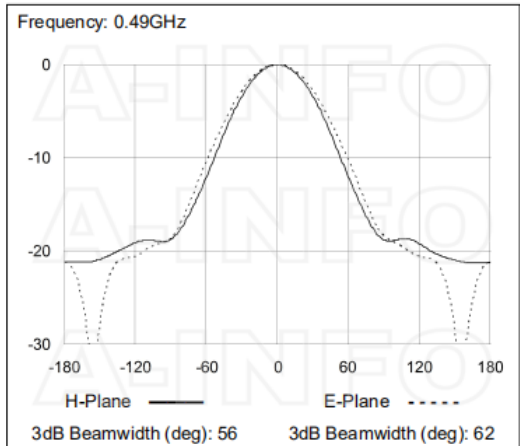

Related Products



LB-1500-10-C-MB Round Type
Mounting Bracket



LB-1500-10-C-L L type mounting
bracket



Carrying Case_LB-1500-10-C Al
Alloy Carrying Case



NM-NM-A050-1000 Flexible
Cable Assembly 1000mm DC-
18GHz N Male to N Male



NM-NM-A050-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A050-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A050-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A050-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A050-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male



NM-NM-A050-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male



NM-NM-A100-500 Flexible Cable Assembly 500mm DC-18GHz N Male to N Male



NM-NM-A100-1000 Flexible Cable Assembly 1000mm DC-18GHz N Male to N Male



NM-NM-A100-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A100-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A100-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A100-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A100-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male




NM-NM-A100-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male

Similar Products



LB-1500-10-A Standard Gain
Horn Antenna 0.49-0.75GHz 10dB
Gain Rectangular Waveguide
Interface




LB-1500-10-ASPO Standard Gain
Horn Antenna 0.49-0.75GHz 10dB
Gain Rectangular Waveguide
Interface



LB-1500-10-C-NF Standard Gain
Horn Antenna 0.49-0.75GHz 10dB
Gain N Type Female




LB-1500-10-C-SF Standard Gain
Horn Antenna 0.49-0.75GHz 10dB
Gain SMA Female



LB-1500-10-C-SFSP0 Standard
Gain Horn Antenna 0.49-0.75GHz
10dB Gain SMA Female



LB-1500-10-C-7/16F Standard
Gain Horn Antenna 0.49-0.75GHz
10dB Gain 7/16(DIN) Female



LB-1500-10-C-7/16FSPO
Standard Gain Horn Antenna
0.49-0.75GHz 10dB Gain
7/16(DIN) Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-1500-10-c-nfsp0-standard-gain-horn-antenna-0-49-0-75-ghz-10db-gain-n-type-female Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---