

For reference only. See data sheet for the detailed specifications.



Technical Specification



Frequency Range(GHz)	75.0 - 99.0
Waveguide	WR10
Gain(dBic)	15 Typ.
Polarization	RHCP
Axial Ratio(dB)	2.0 Typ.
	3.0 Max.
3dB Beamwidth(deg)	E Plane: 35 Typ.
	H Plane: 35 Typ.
VSWR	A Type: 1.20:1 Max.
	C Type: 1.80:1 Max.
Output	A Type: FUGP900(UG-387/U-M)
	C Type: 1.0mm-Female
Material	Cu
Finish	Gold Plated
Size(mm)	A Type: 19.1 x 19.1 x 71.1
	C Type: 19.1 x 25 x 96.5
Net Weight(Kg)	A Type: Around 0.06
	C Type: Around 0.09

Outline Drawing (Size: mm)

FUGP900 Output (P/N: LB-CNH-10-15-R06-A)

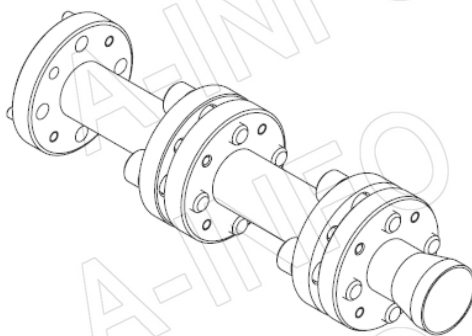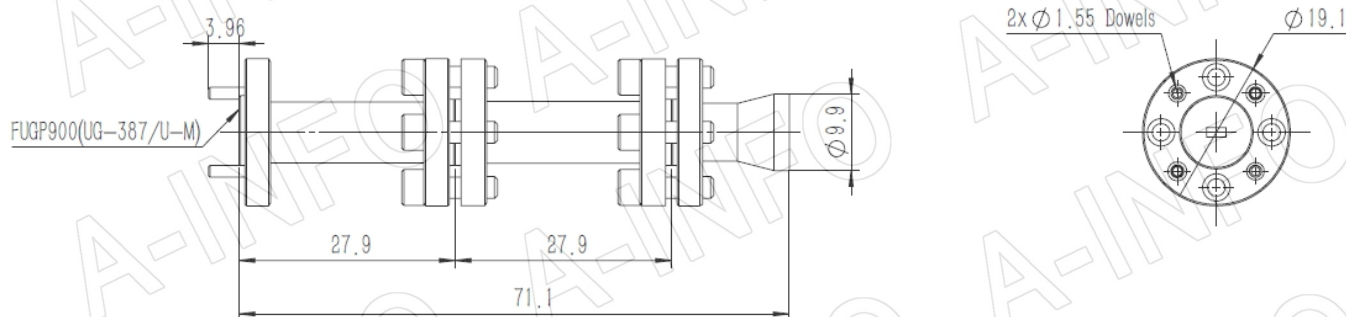

AINFO Inc.

Page 1 of 5


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

1.0mm-Female Output (P/N: LB-CNH-10-15-R06-C-1.0F)

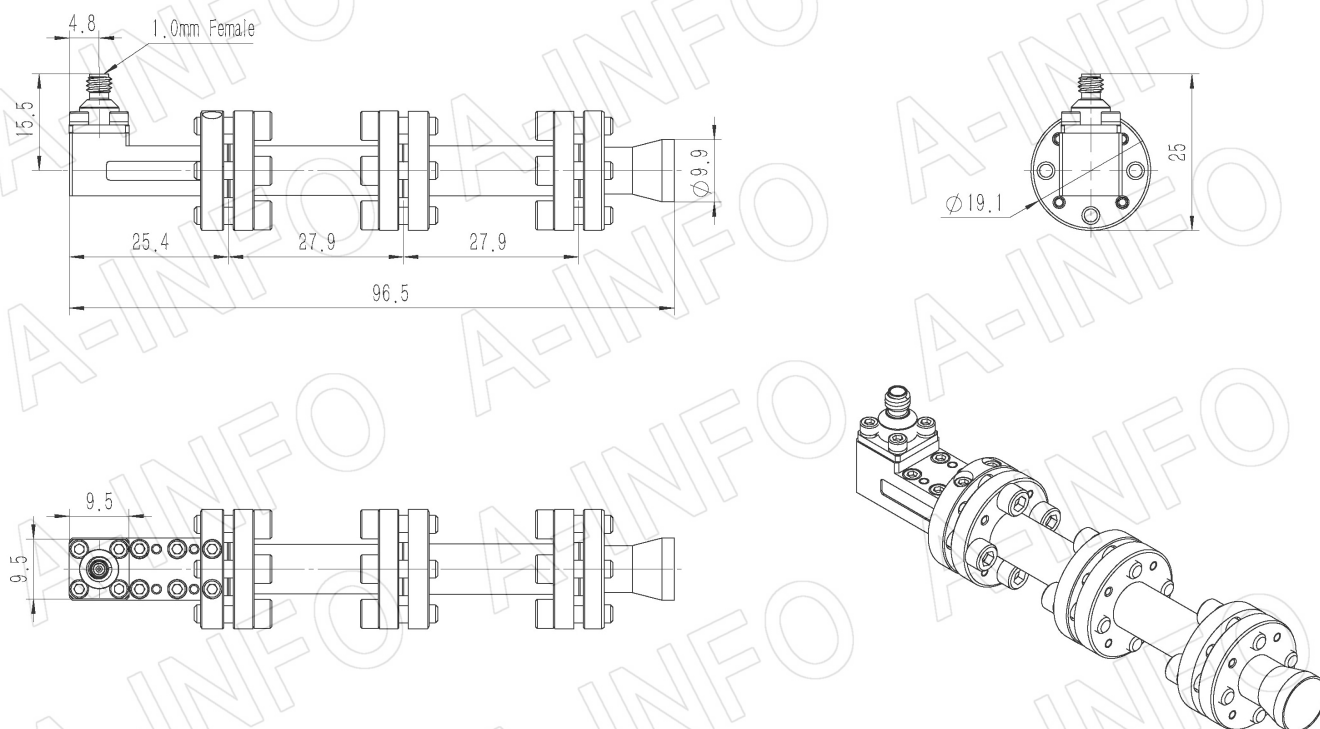


Flange Drawing (Size: mm)

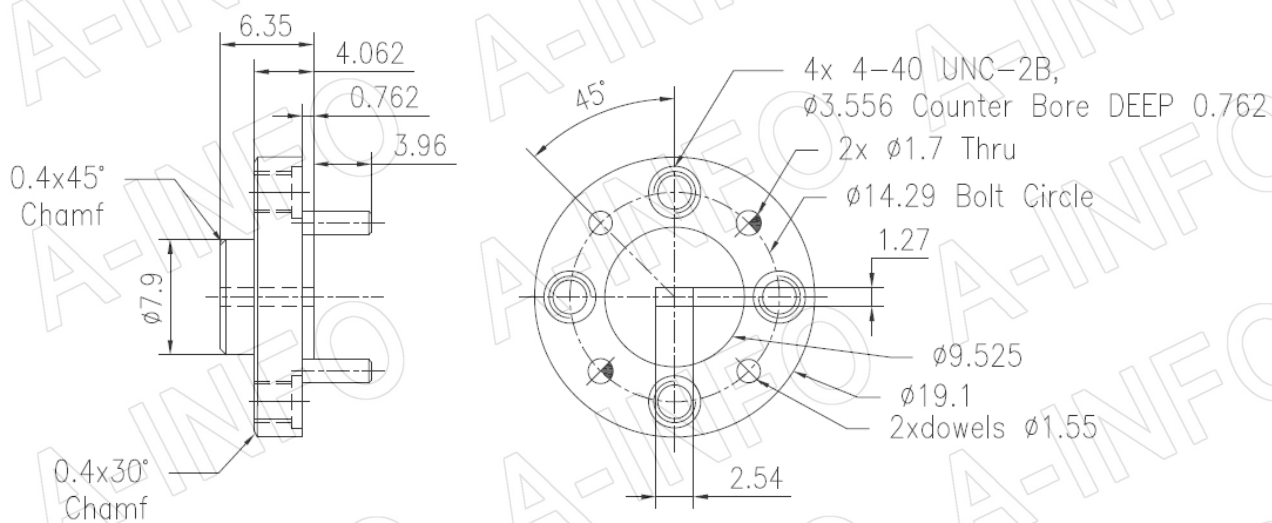


FUGP900
(equivalent to UG-387/U-M)

Test Results


1. Gain & Antenna Factor

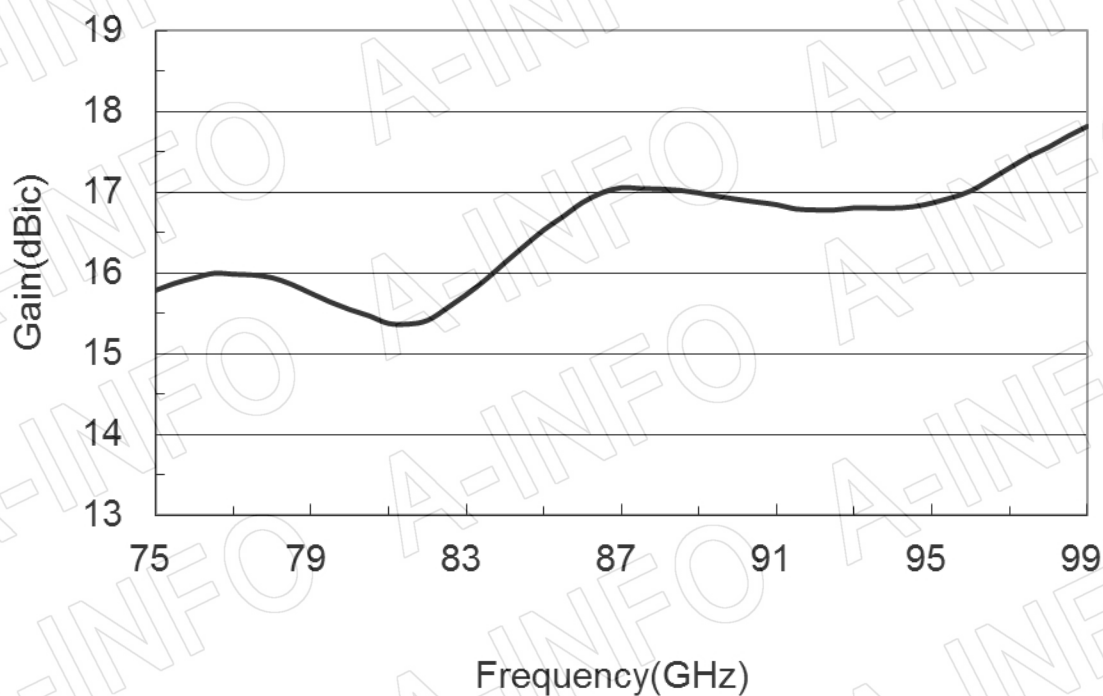


2. Axial Ratio

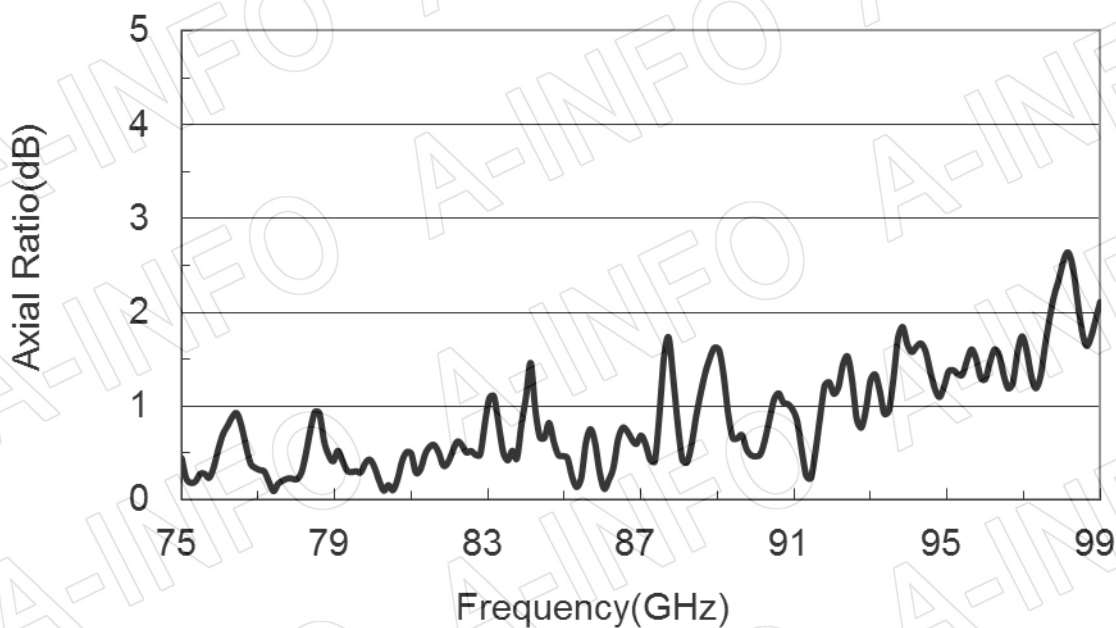

3. VSWR_A Type

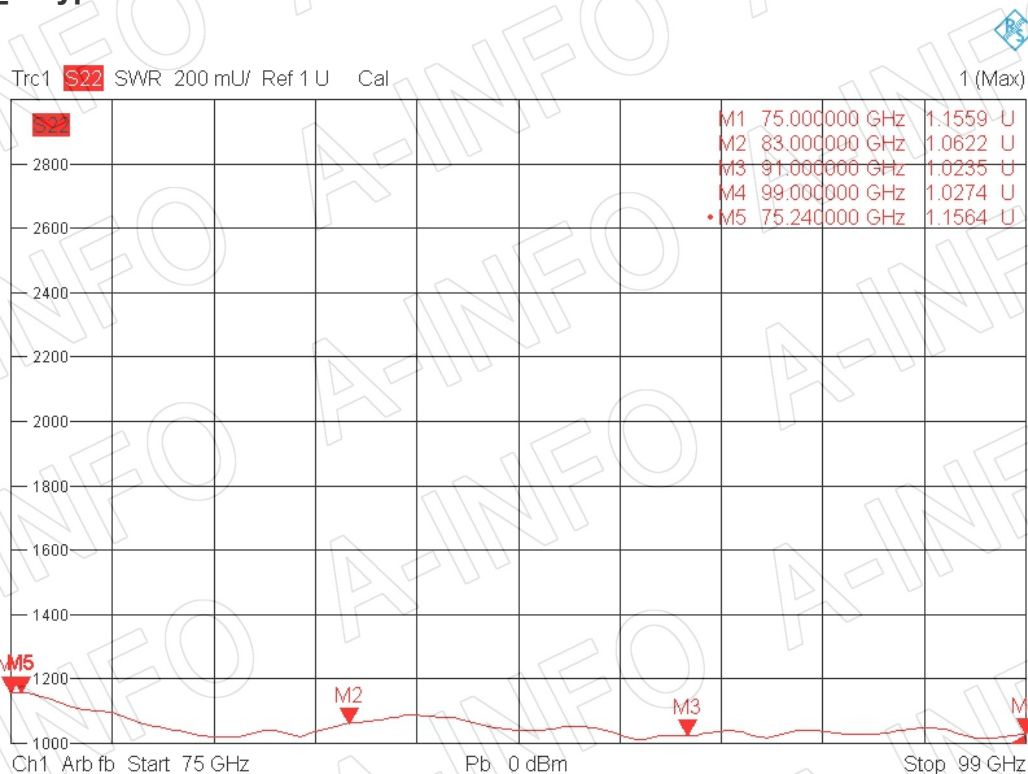

VSWR_C Type

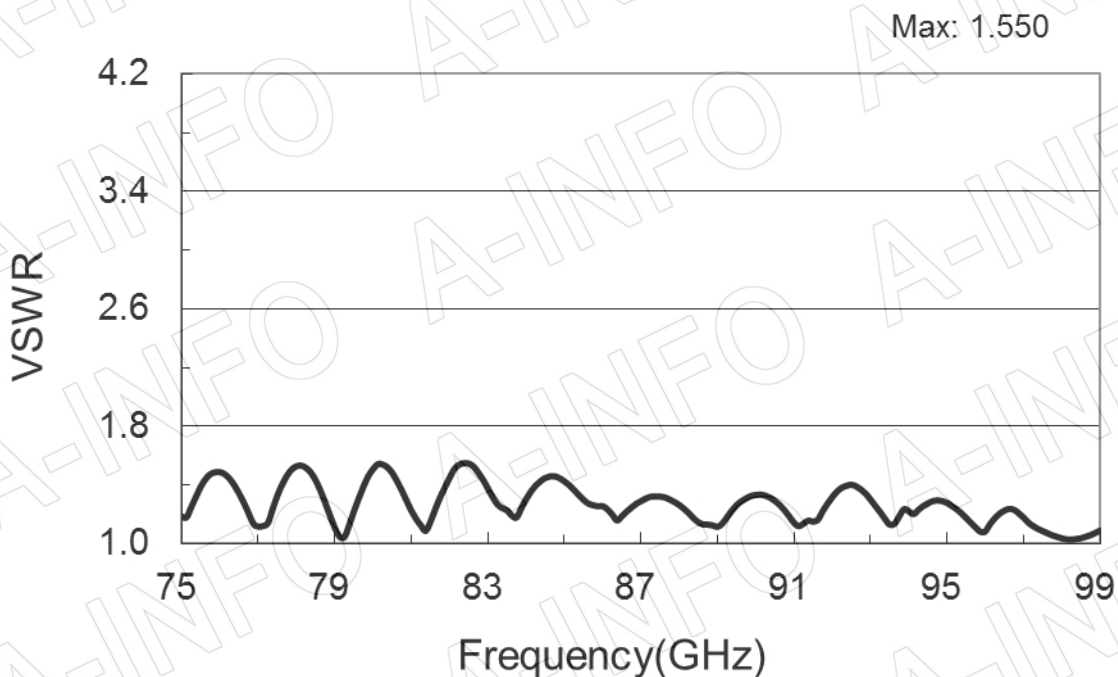

4. Pattern

