


For reference only. See data sheet for the detailed specifications.


Technical Specification

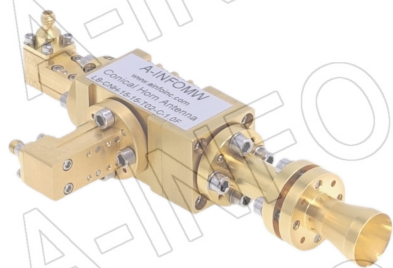

Frequency Range(GHz)	A Type, WG output:	50.0 – 75.0
	C Type, 1.0mm-F:	50.0 – 75.0
	C Type, 1.85mm-F:	50.0 – 65.0
Waveguide	WR15	
Gain(dBi)	15 Typ.	
Polarization	Dual Linear	
3dB Beamwidth(deg)	E Plane:	23 Typ.
	H Plane:	29 Typ.
Cross Pol. Isolation(dB)	40 Typ.	
Port to Port Isolation(dB)	45 Typ. ; 35 Min.	
VSWR	A Type:	1.80:1 Max.
	C Type:	2.40:1 Max.
Output	A Type:	FUGP620(UG-385/U)
	C Type:	1.0mm-Female or 1.85mm-Female
Material	Cu	
Finish	Gold Plated	
Size(mm)	A Type:	20.3 x 20.3 x 84.8
	C Type:	44.4 x 25.6 x 110.2
Net Weight(Kg)	A Type:	0.15 Around
	C Type:	0.20 Around

Outline Drawing (Size: mm)

FUGP620 Output (P/N: LB-CNH-15-15-T02-A)

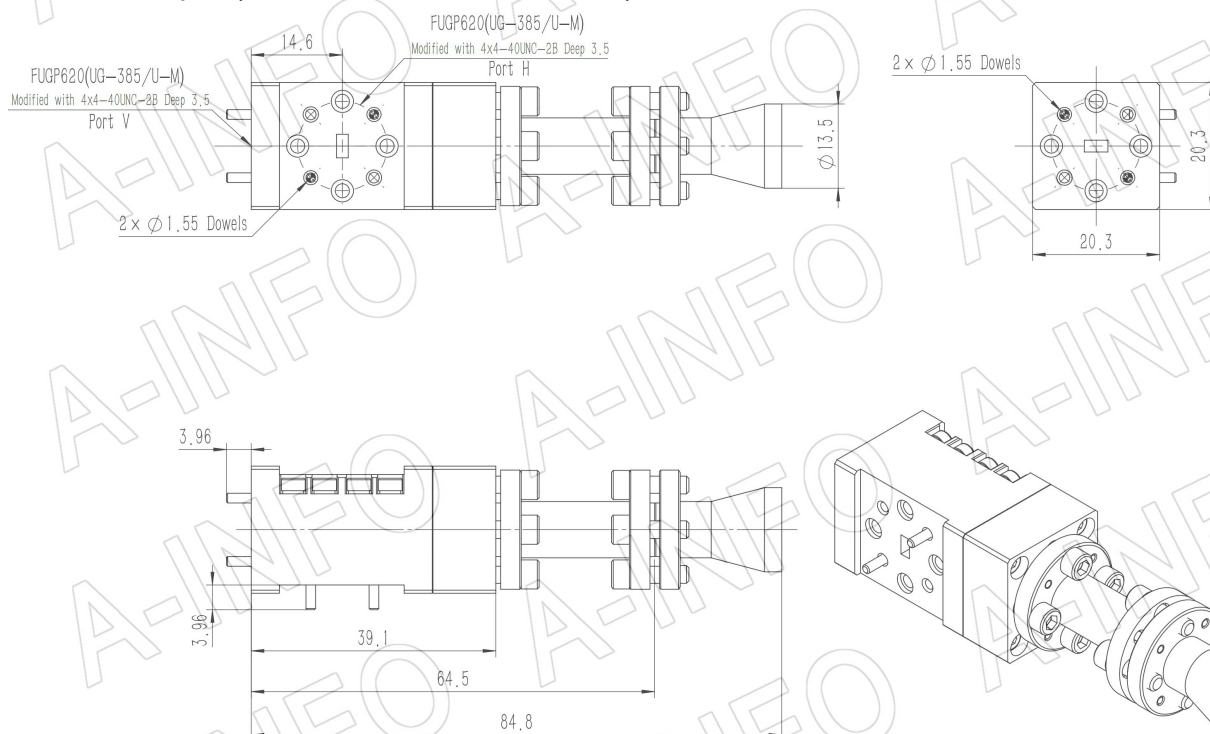

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 1 of 16

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


1.0mm-Female Output (P/N: LB-CNH-15-15-T02-C-1.0F)

For 1.85mm-Female output outline drawing, please contact A-INFO.

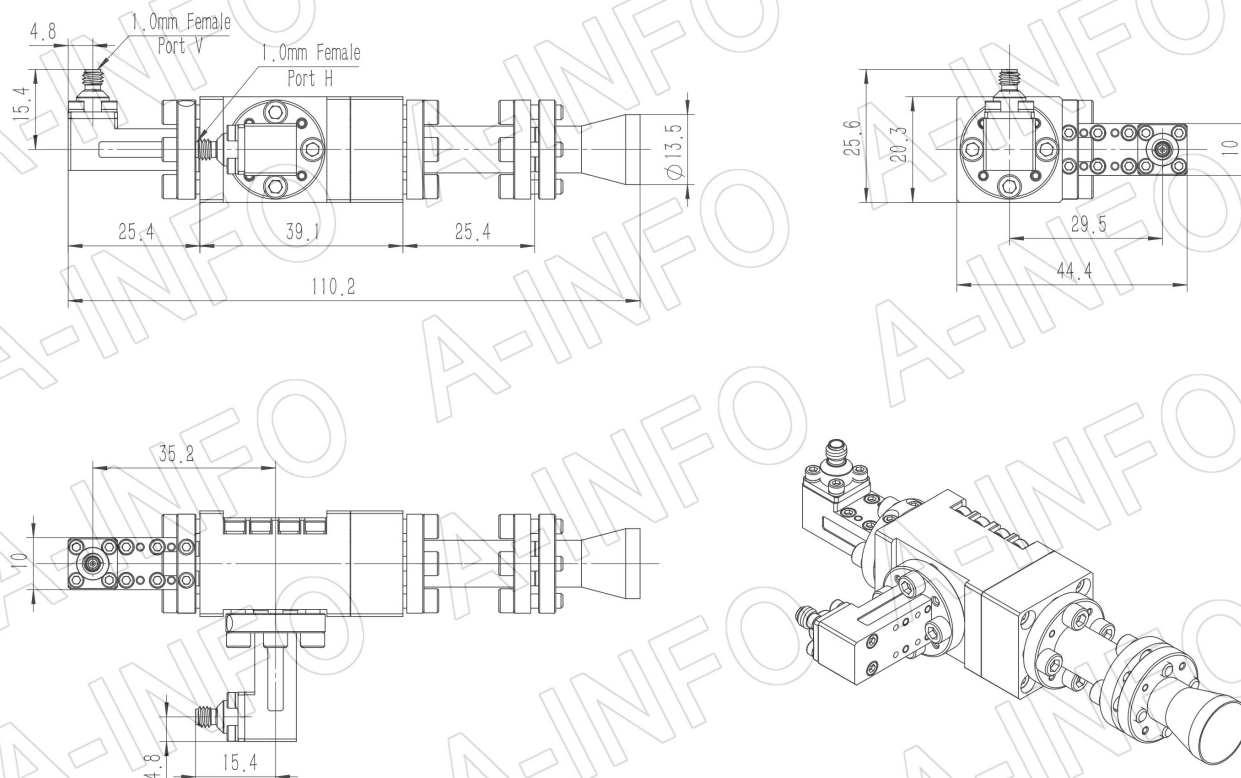


1.0mm-Female Output with Round Mounting Bracket (Option, P/N: LB-CNH-15-15-MB)

For 1.85mm-Female output outline drawing, please contact A-INFO.

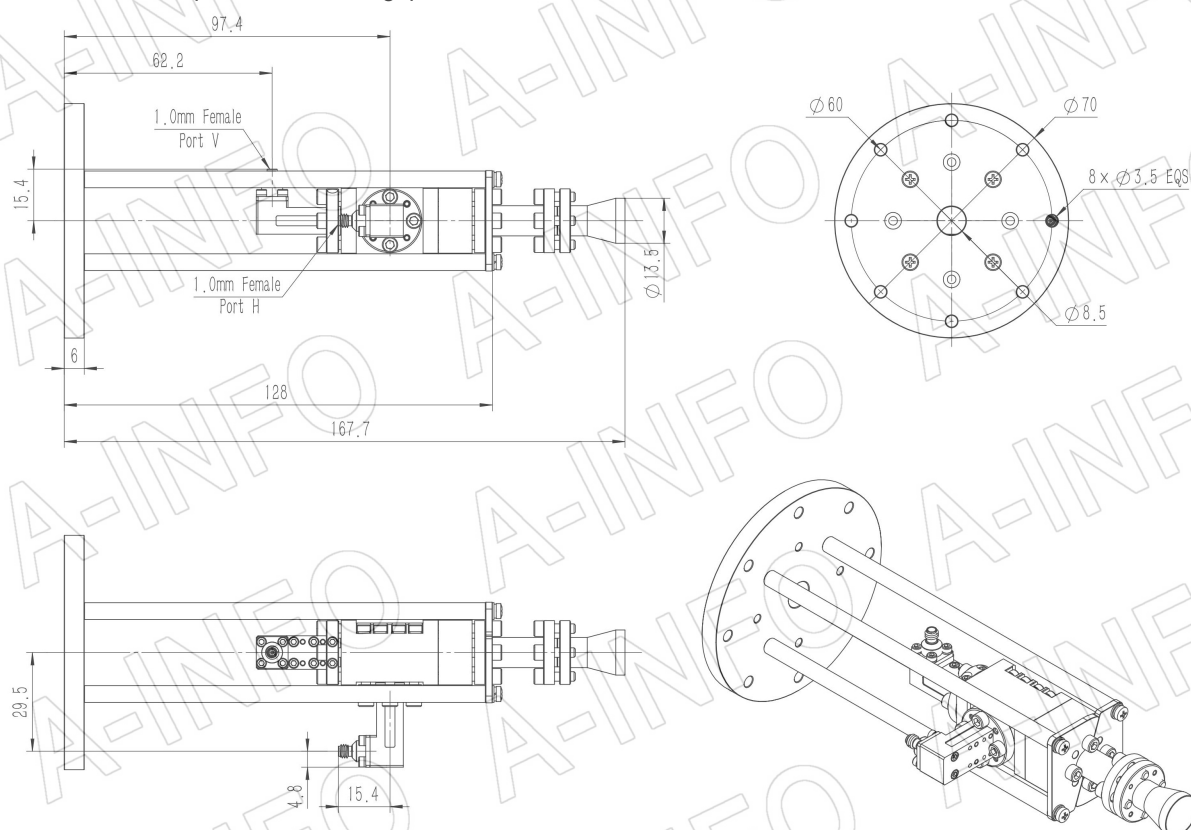


1.0mm-Female Output with L Type Mounting Bracket (Option, P/N: LB-CNH-15-15-MBL)

For 1.85mm-Female output outline drawing, please contact A-INFO.

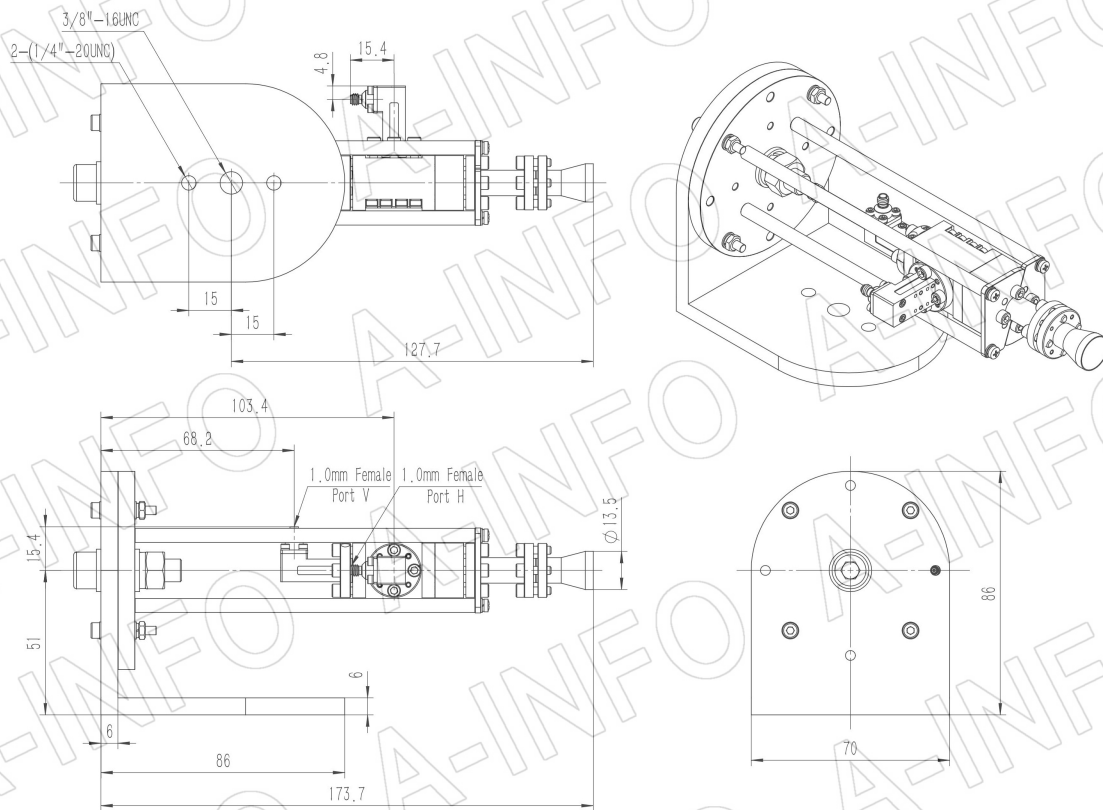

Flange Drawing (Size: mm)

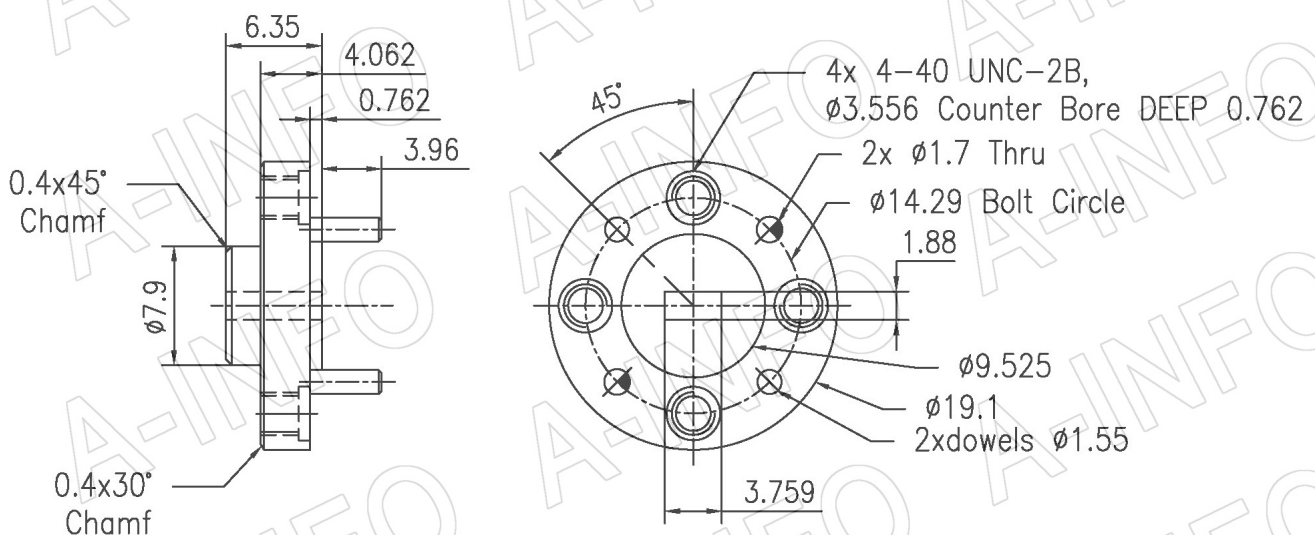

FUGP620
(equivalent to UG-385/U)

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,



Page 3 of 16

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results


1. Gain & Antenna Factor

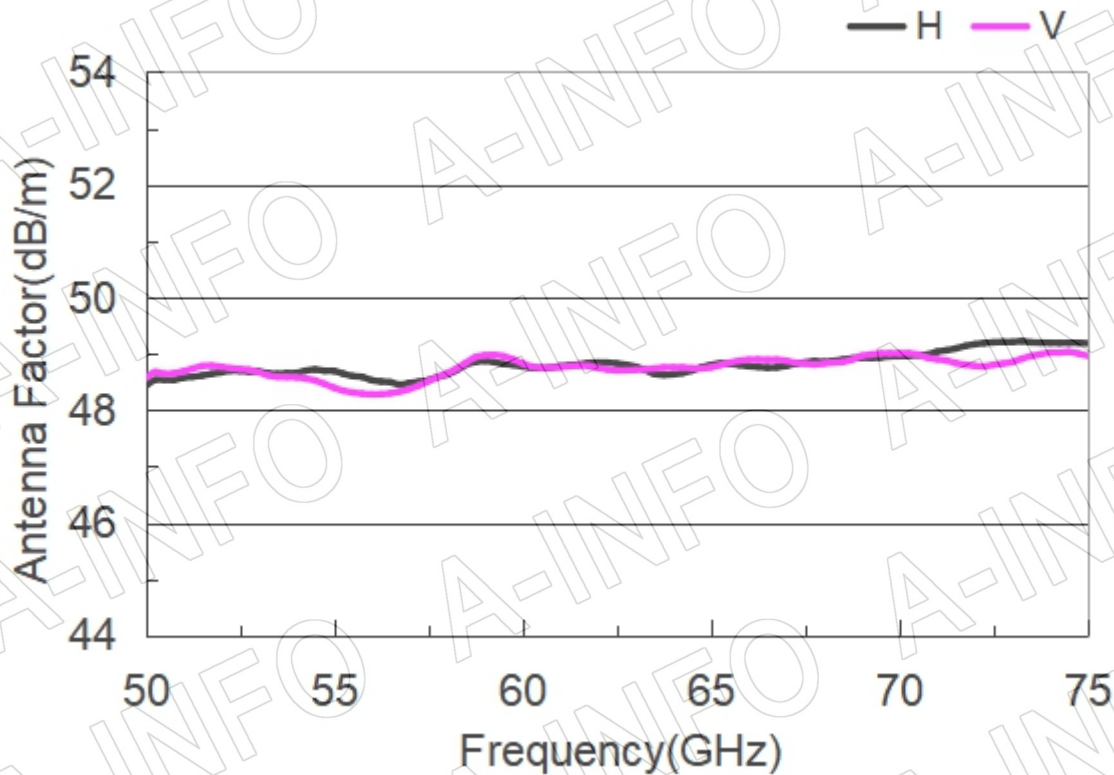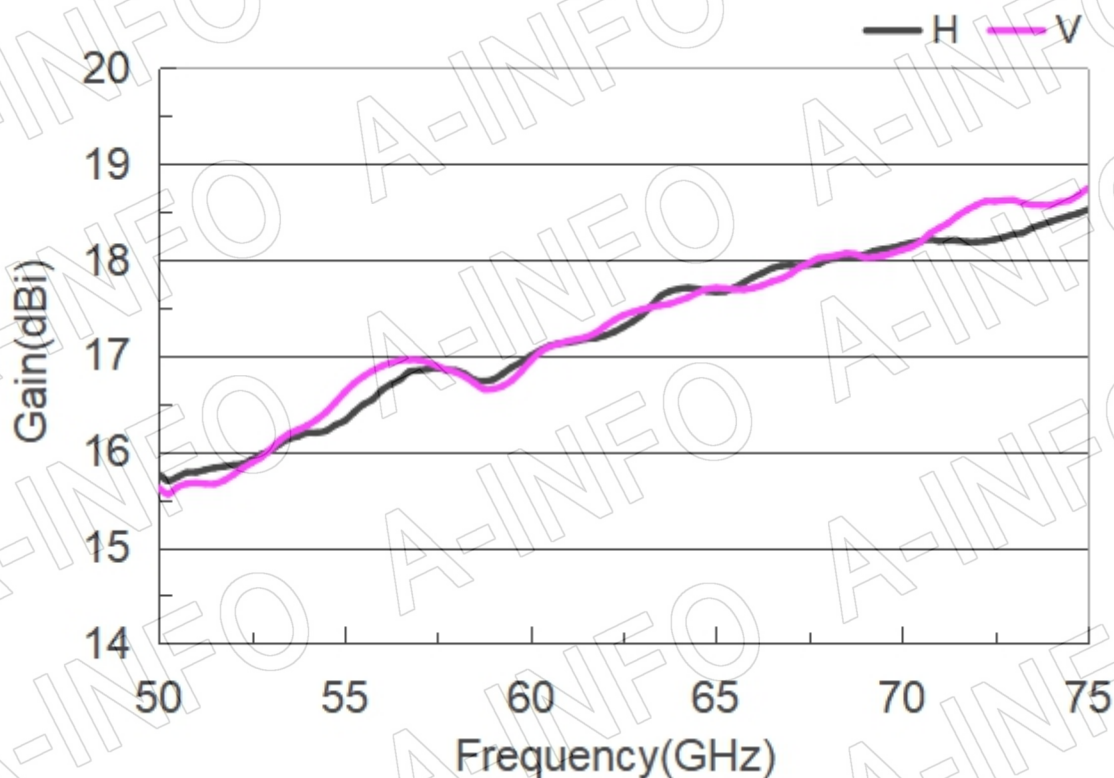

2. Cross Polarization Isolation

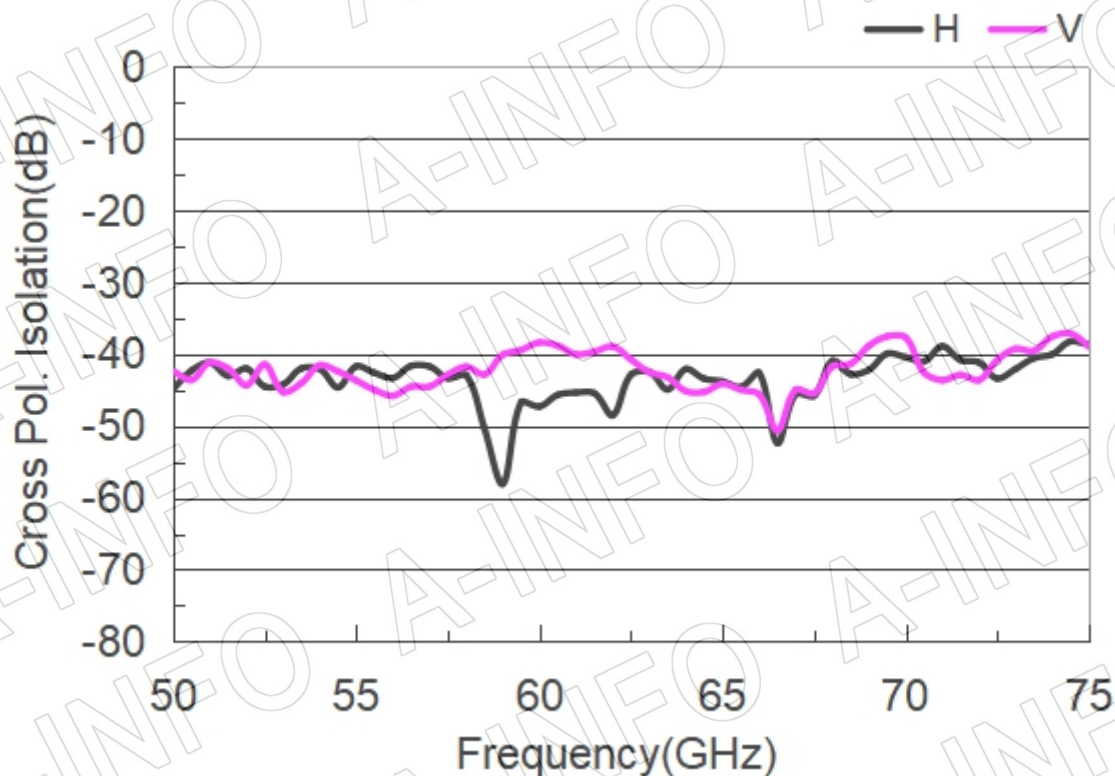


3. Port to Port Isolation

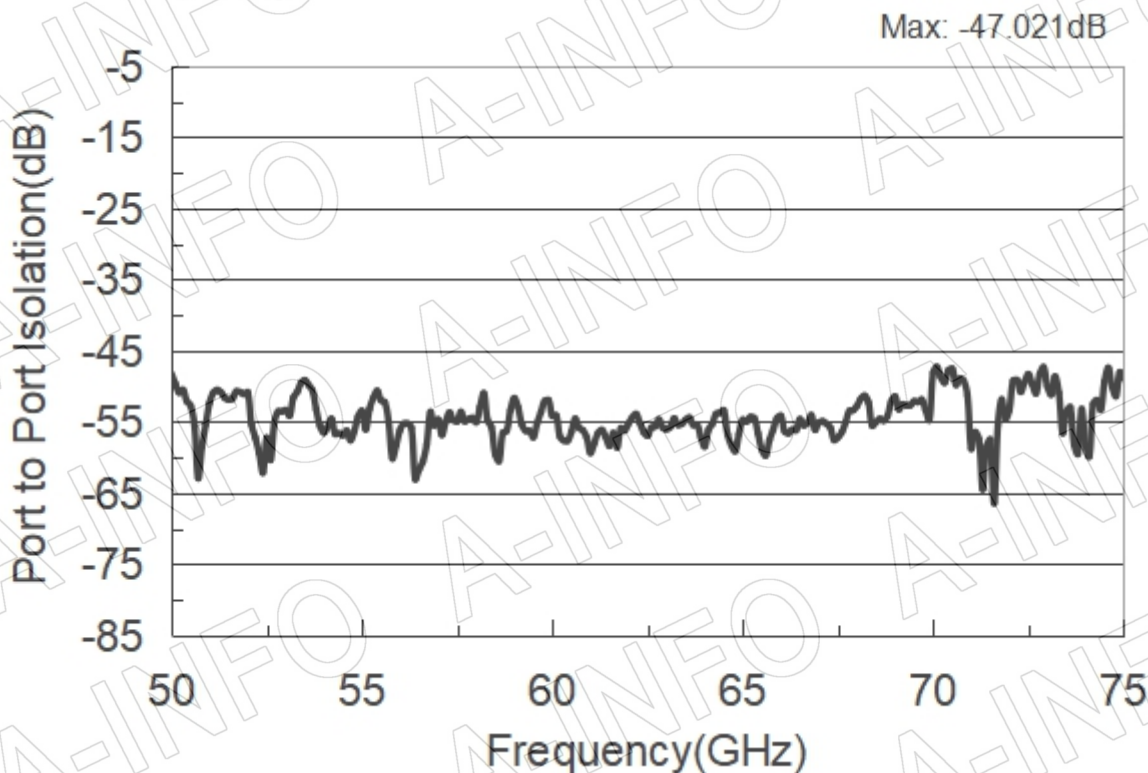


4. VSWR_A Type

Port-H

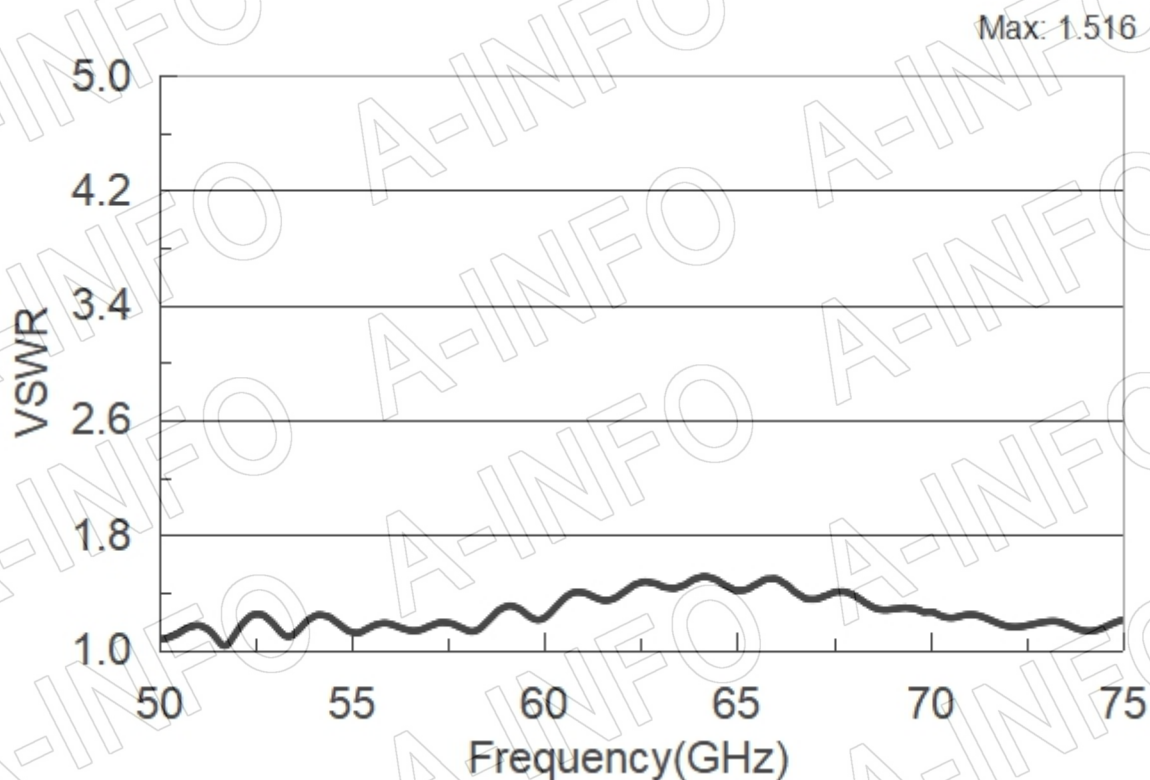

Port-V

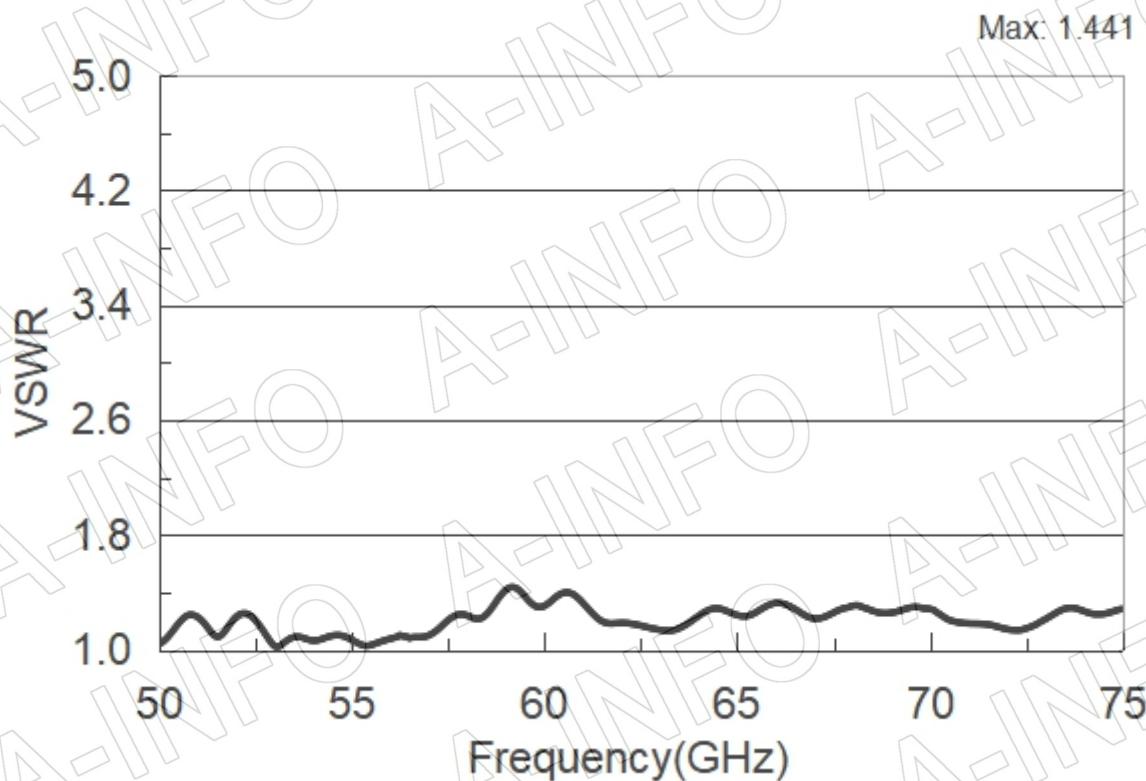

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

Page 6 of 16


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


VSWR_C Type
Port-H

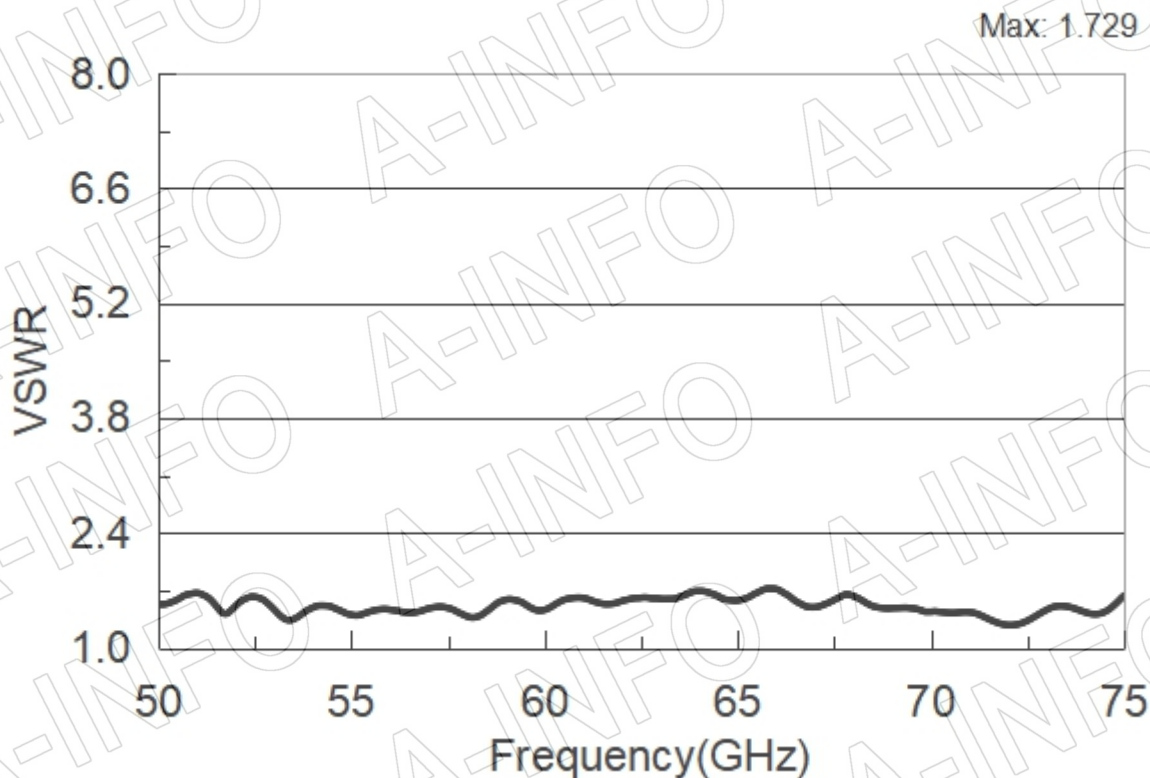

Port-V

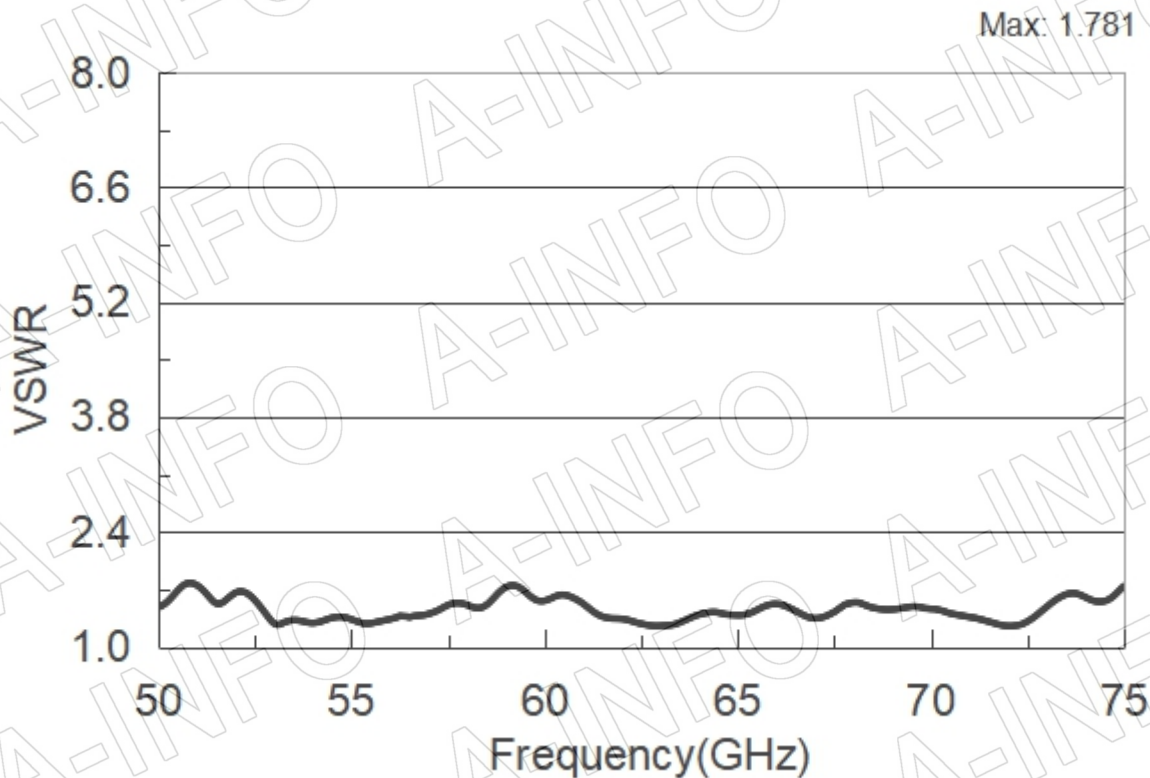

5. Pattern

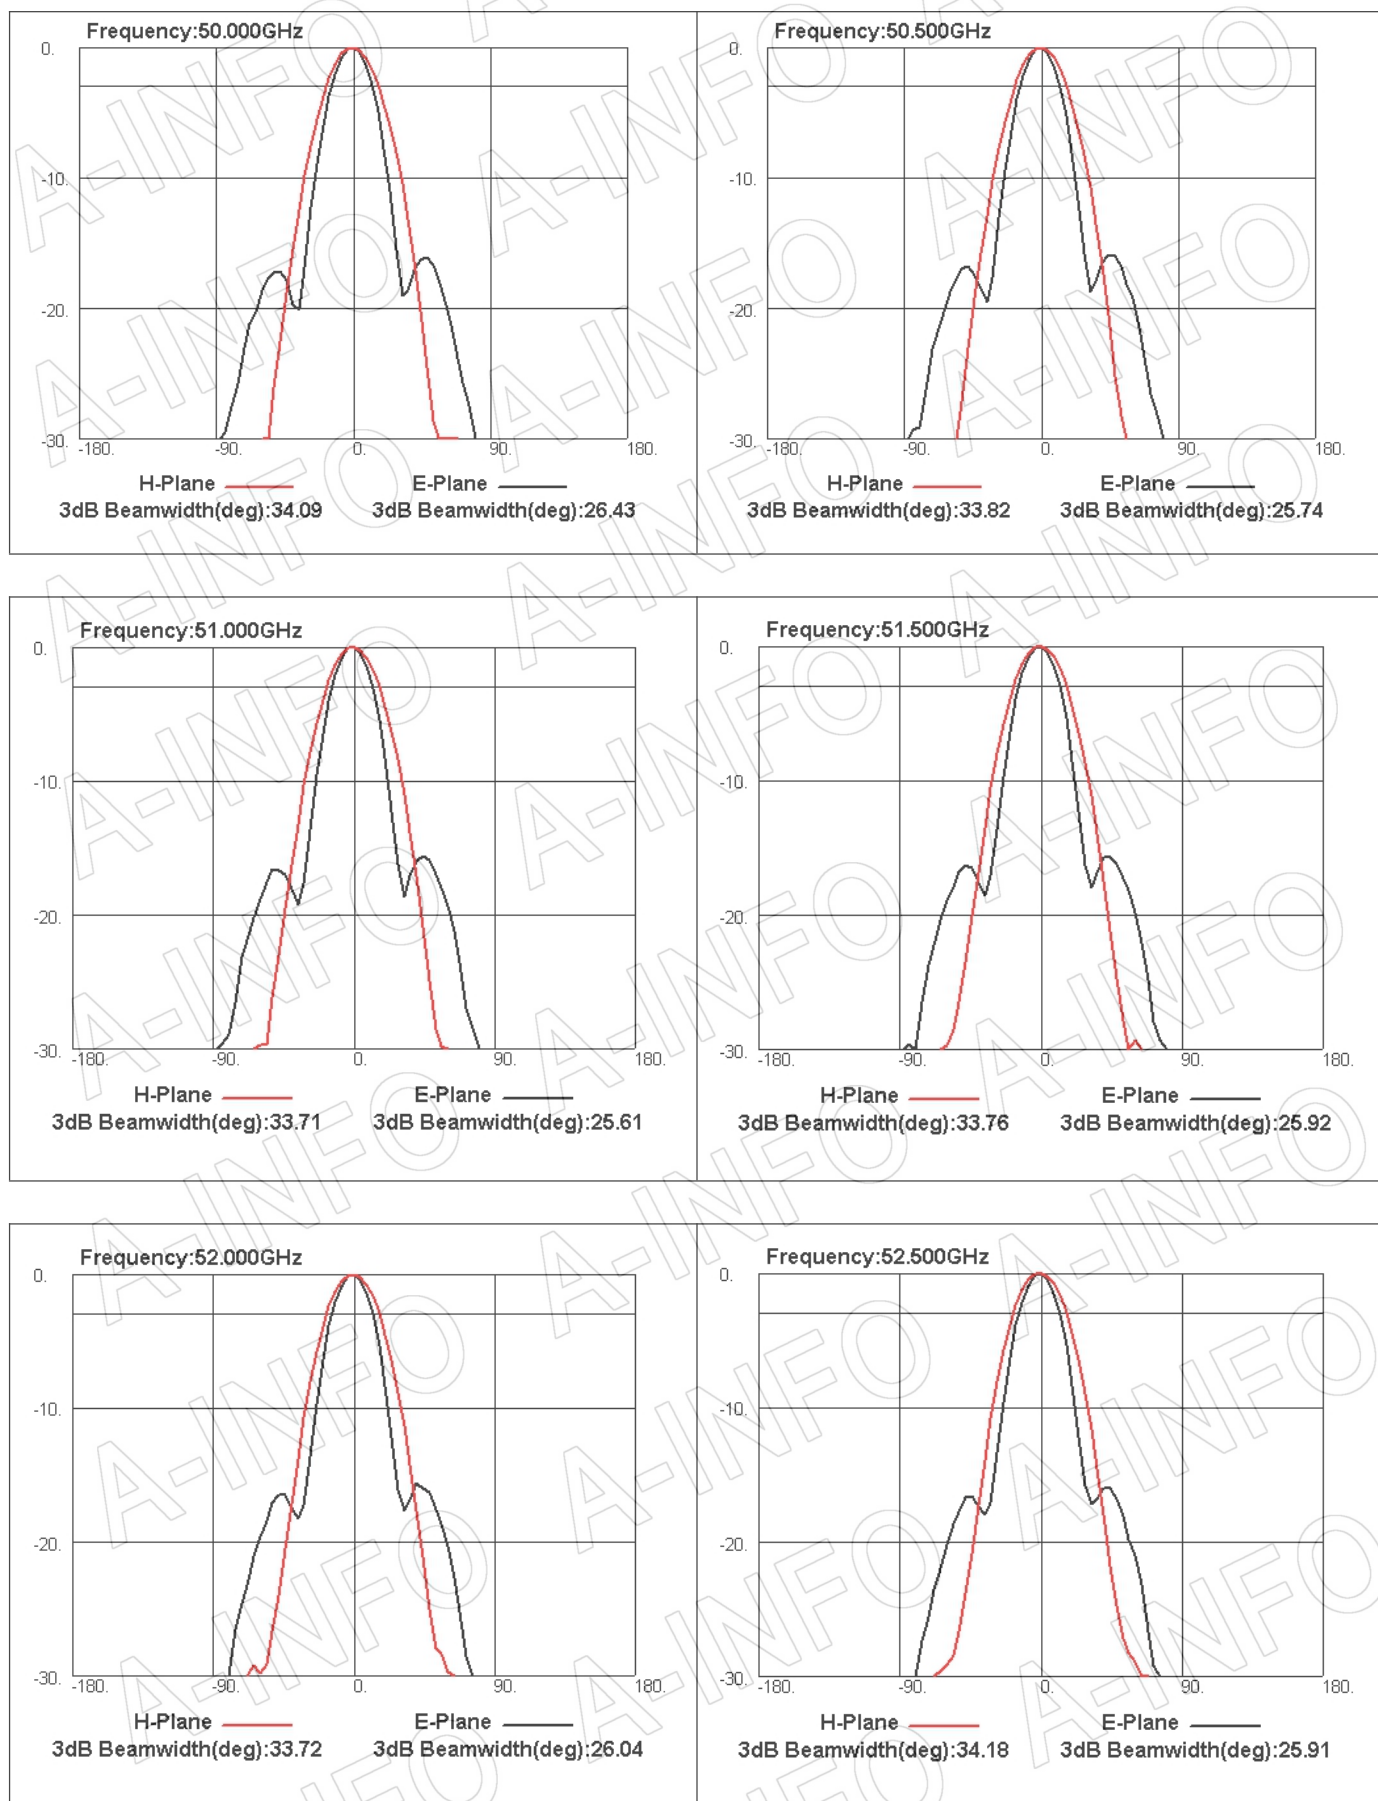

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 8 of 16

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

