


For reference only. See data sheet for the detailed specifications.


Technical Specification

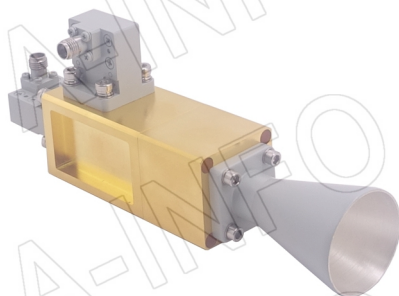

Frequency Range(GHz)	25.0 – 33.0
Waveguide	WR34
Gain(dBi)	15 Typ.
Polarization	Dual Linear
3dB Beamwidth(deg)	E Plane: 22 Typ.
	H Plane: 26 Typ.
Cross Pol. Isolation(dB)	40 Typ.
Port to Port Isolation(dB)	50 Typ. ; 40 Min.
VSWR	A Type: 2.0:1 Max.
	C Type: 2.0:1 Max.
Output	A Type: FBP260(UBR260) (Modified with 4xM3 D5)
	C Type: 2.92mm-Female
Material	Al
Finish	Gold Plated and Silver Plated, Gray Paint
Size(mm)	A Type: 29 x 29 x 114.3
	C Type: 30.9 x 52.6 x 138.3
Net Weight(Kg)	A Type: 0.38 Around
	C Type: 0.48 Around

Outline Drawing (Size: mm)

FBP260 Output (P/N: LB-CNH-34-15-T26-A)

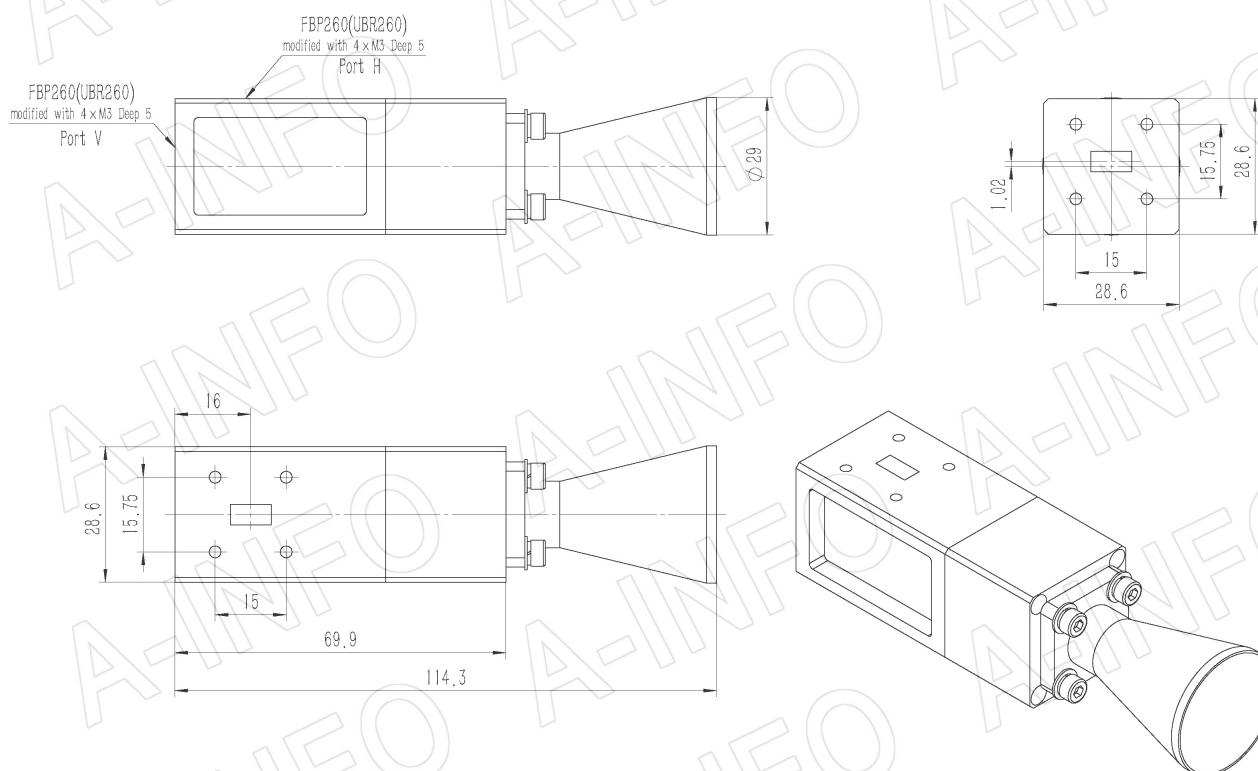

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


Page 1 of 10

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

2.92mm-Female Output (P/N: LB-CNH-34-15-T26-C-KF)

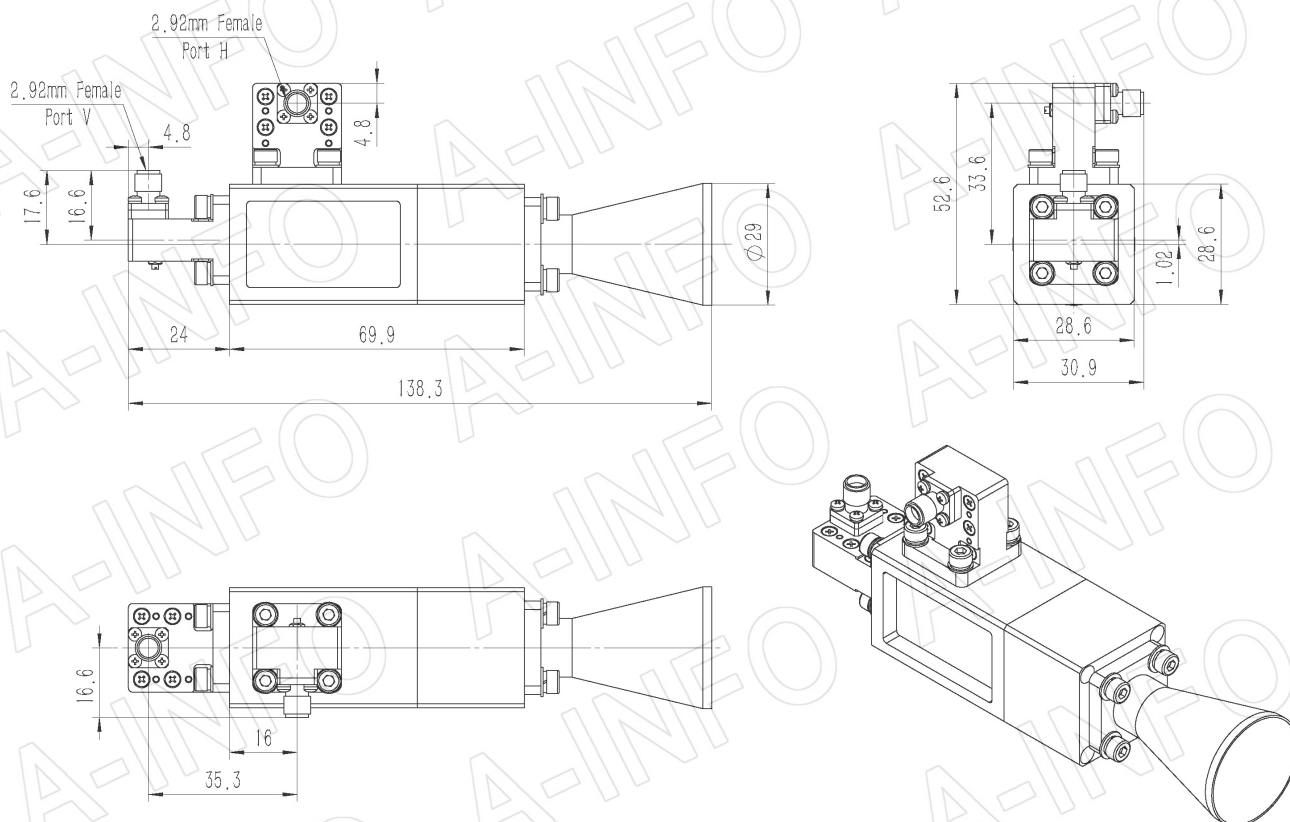



Flange Drawing (Size: mm)

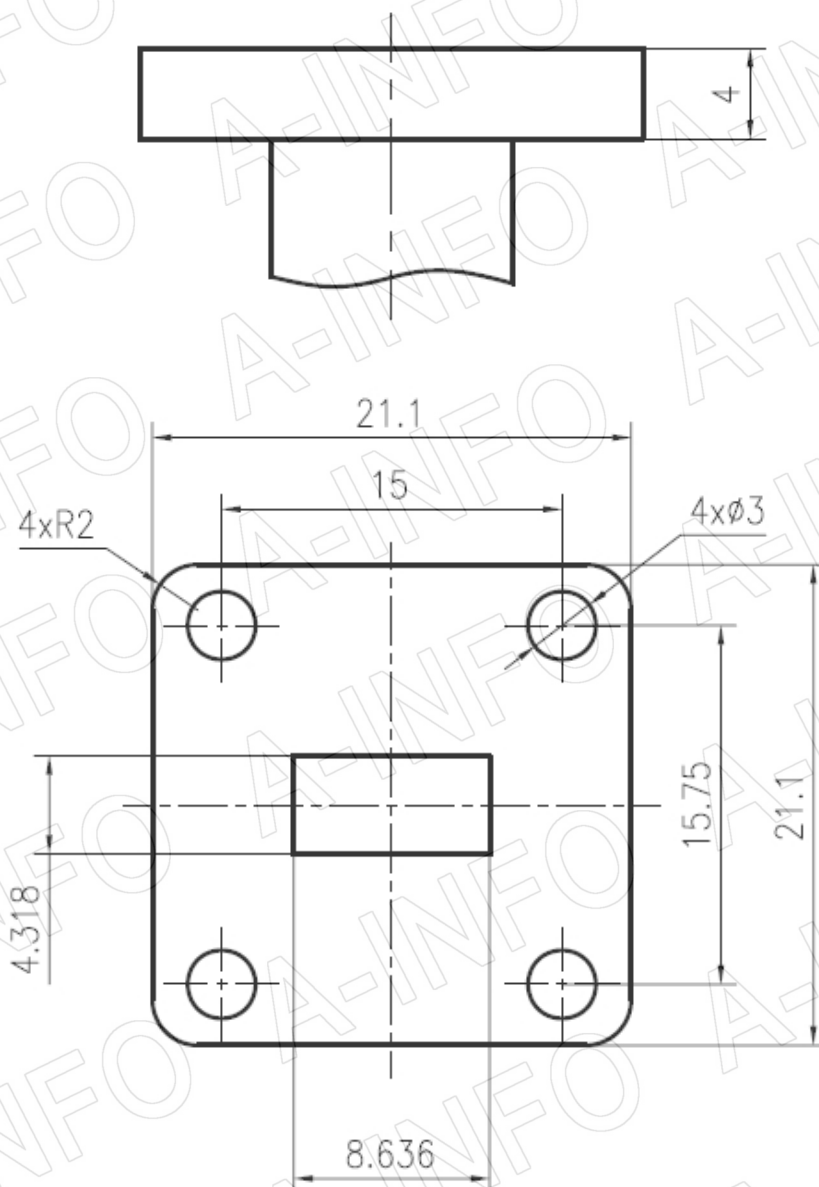


FBP260

Test Results


1. Gain & Antenna Factor

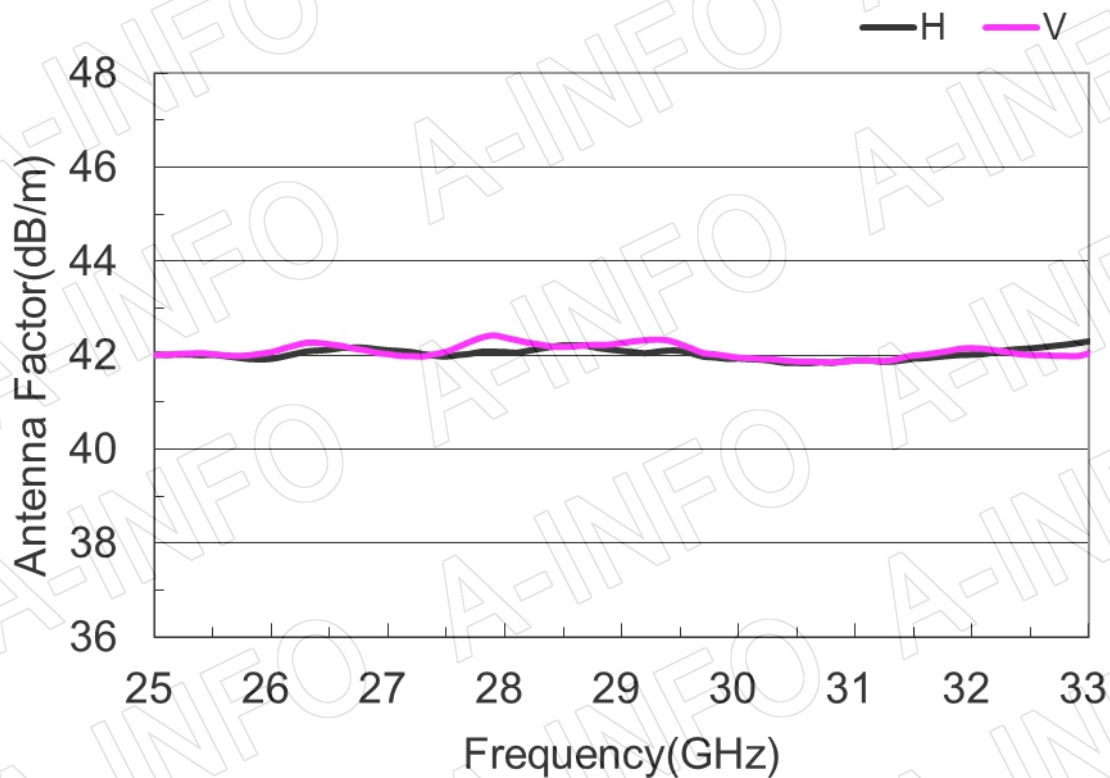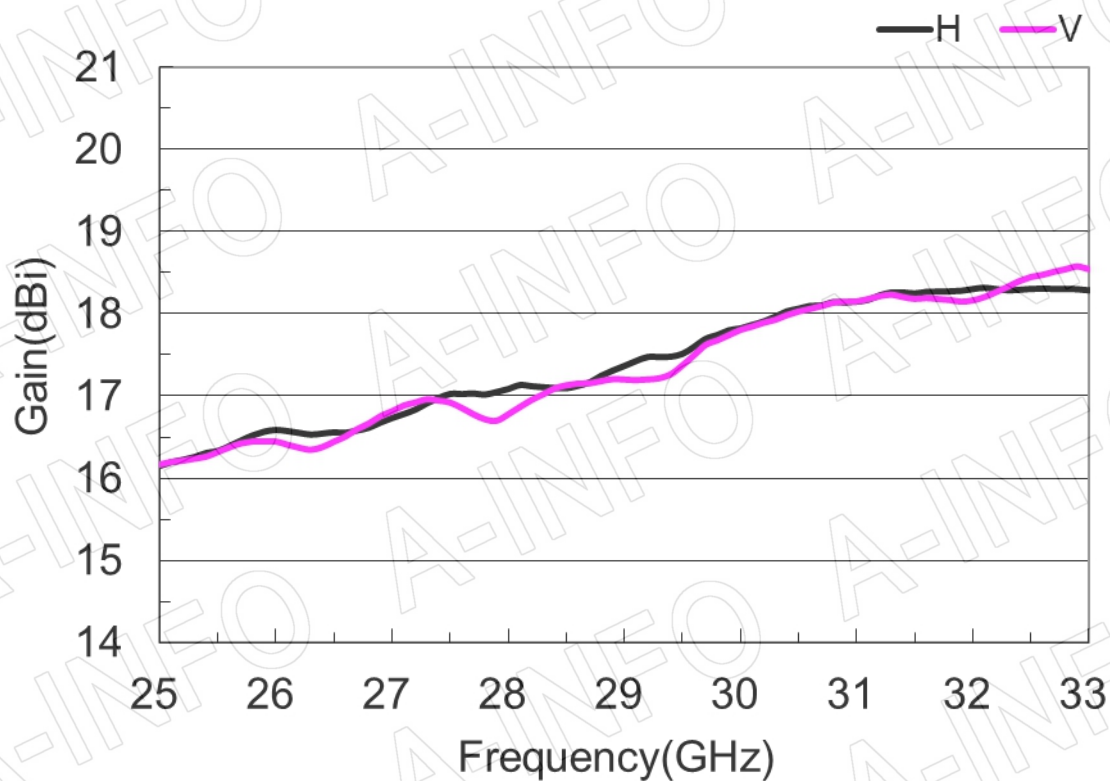

2. Cross Polarization Isolation

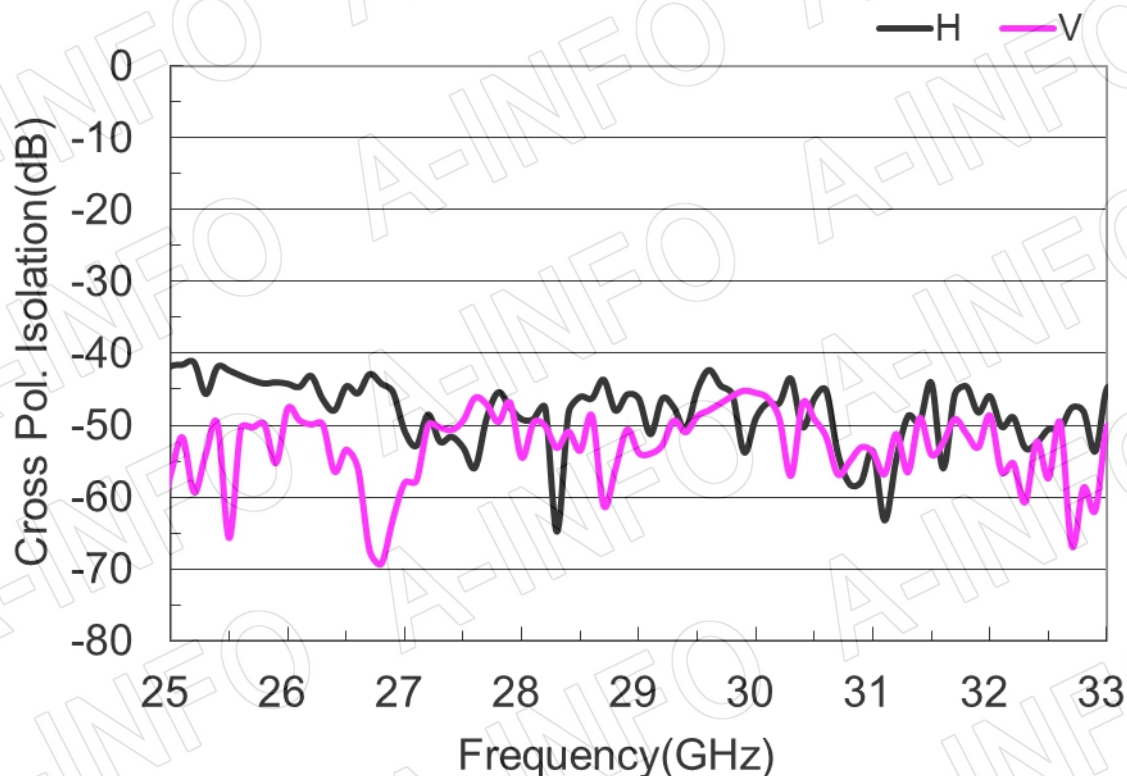


3. Port to Port Isolation

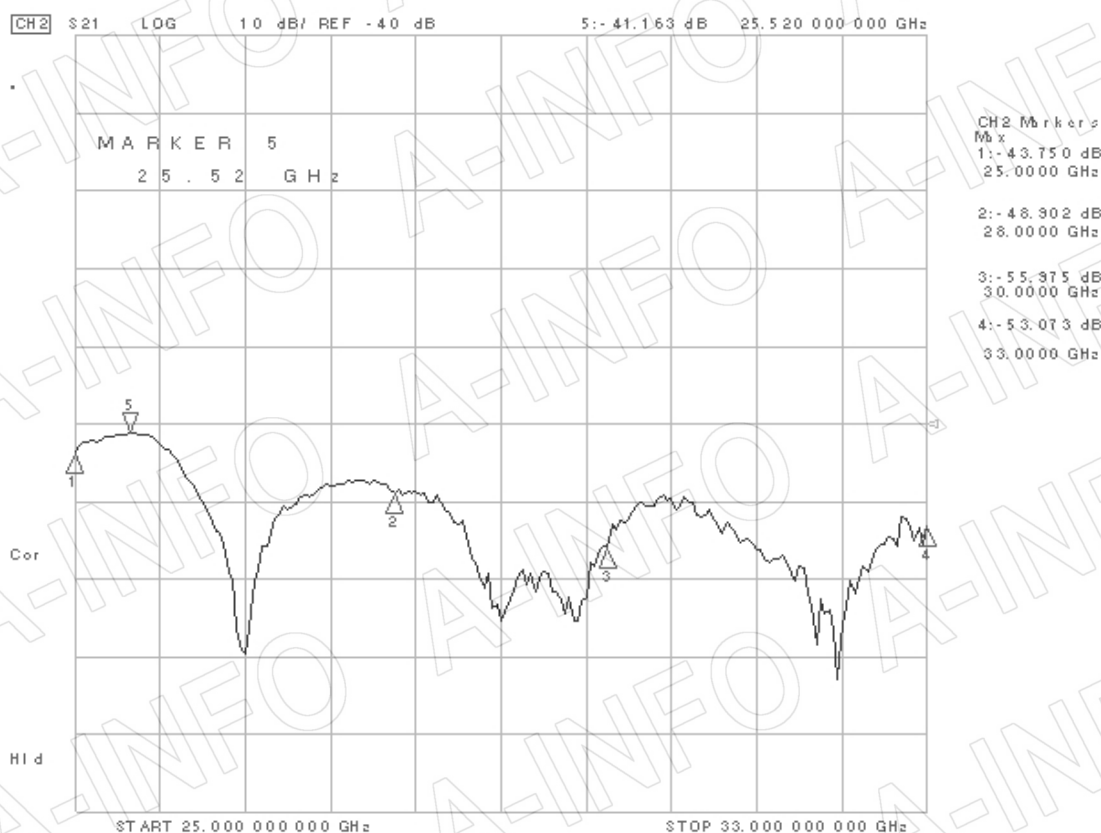


4. VSWR_A Type

Port-H

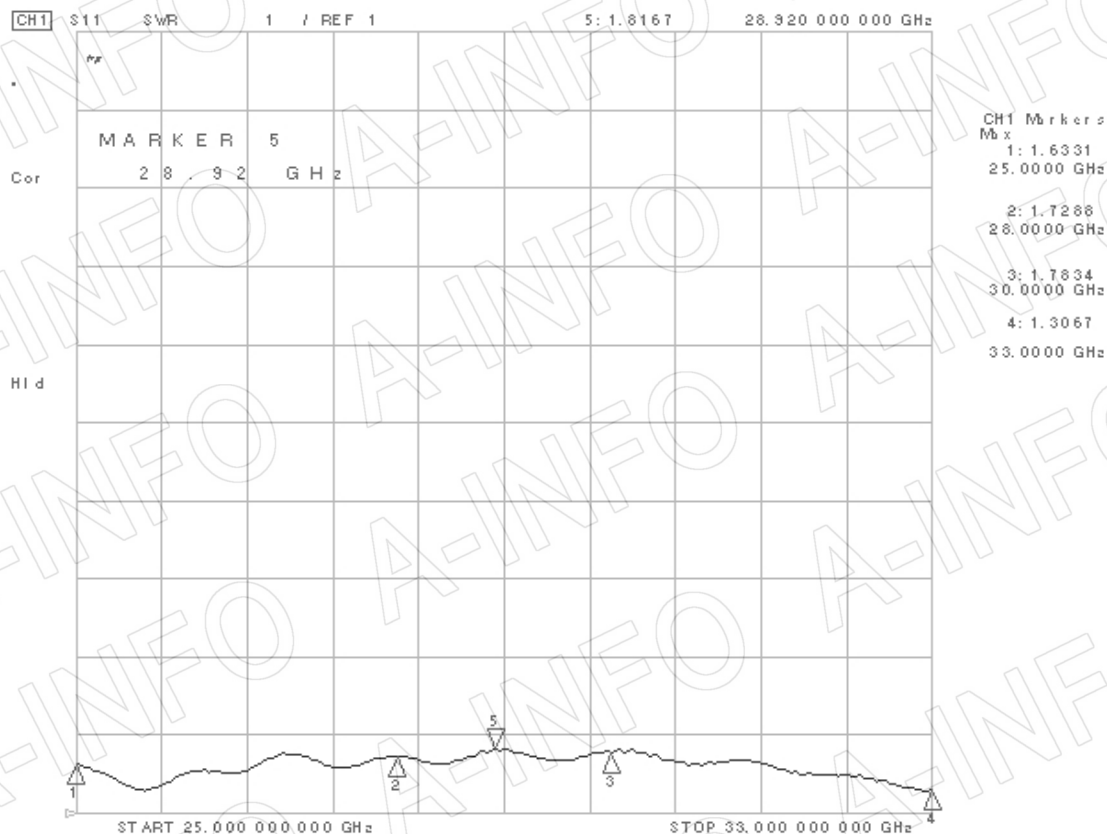


Port-V

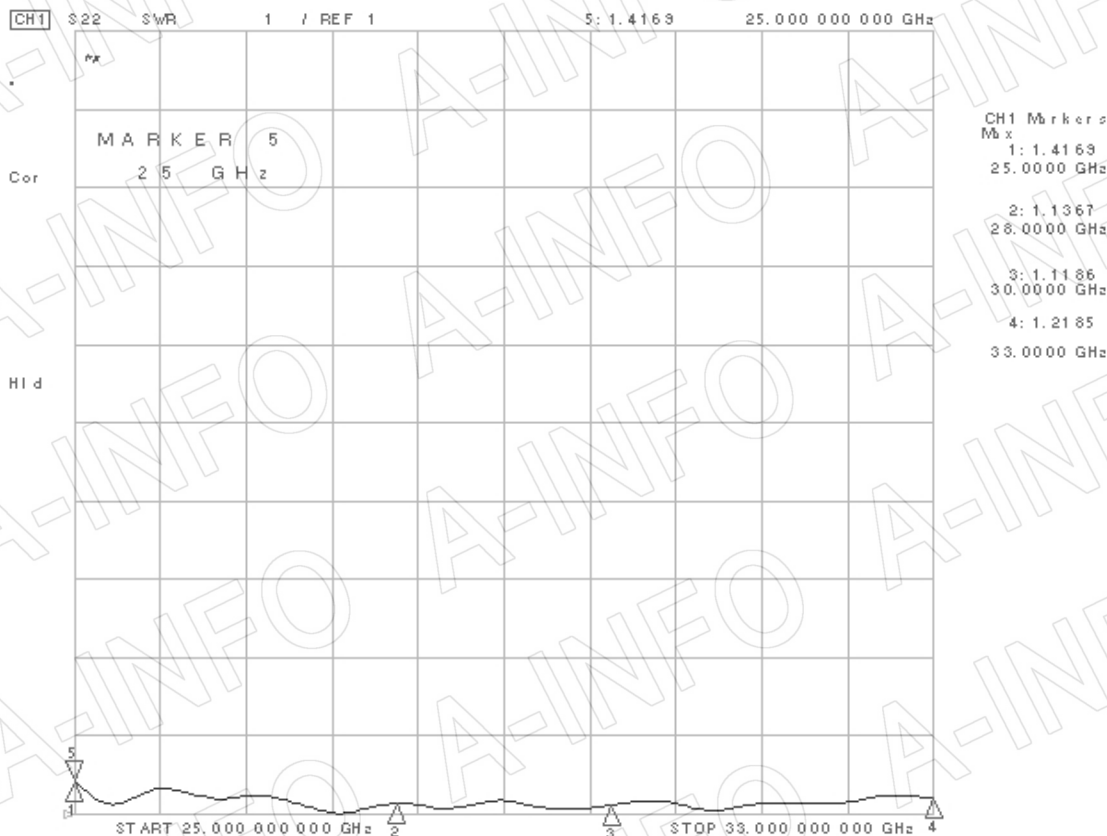


VSWR_C Type


Port-H

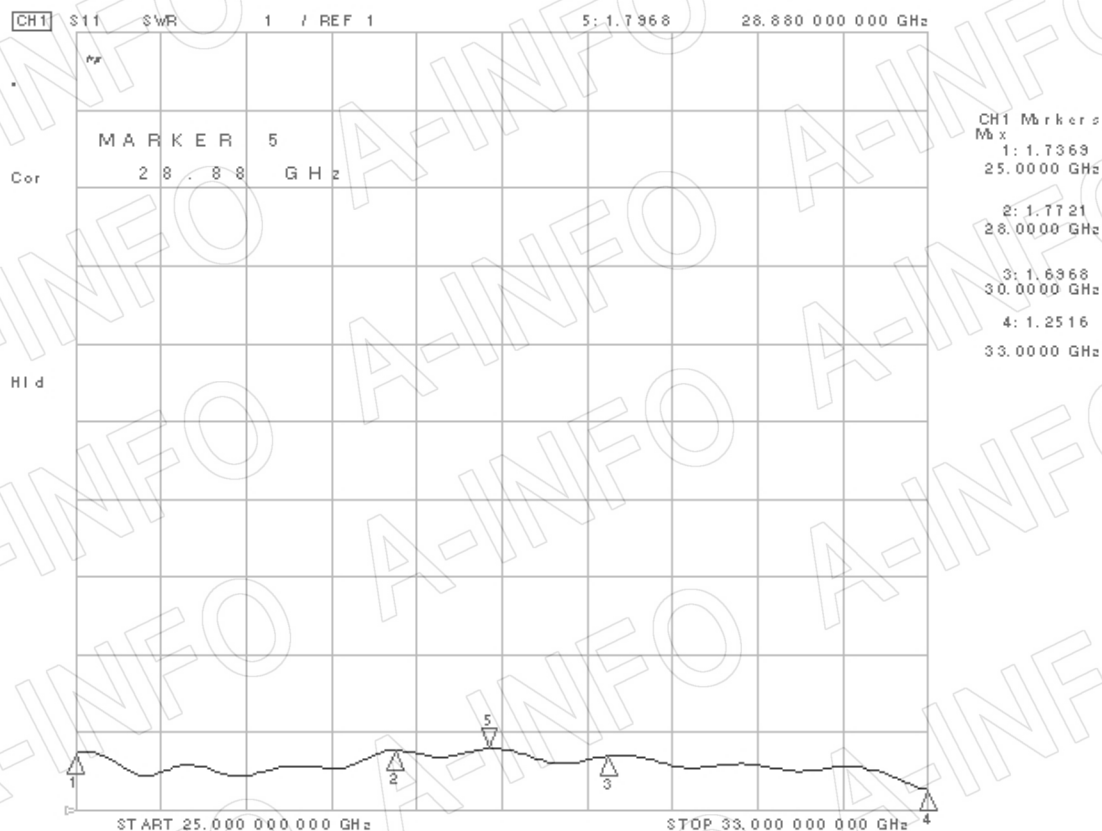

Port-V

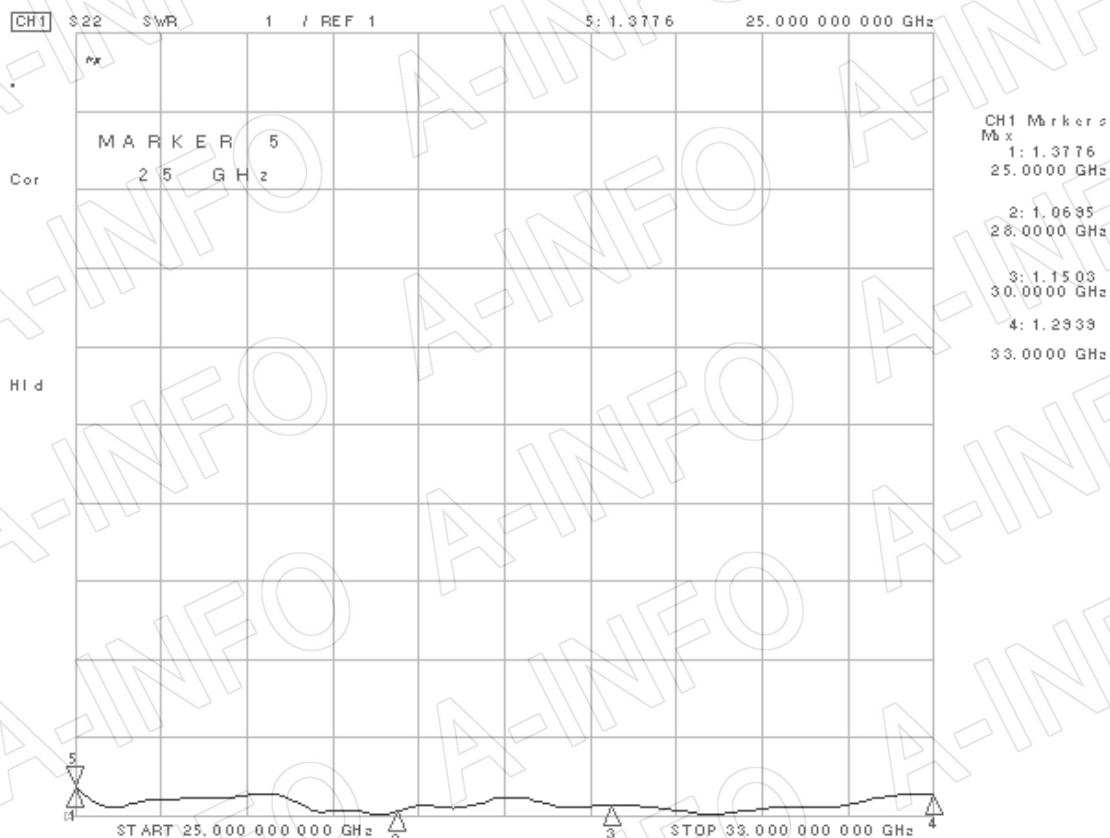

5. Pattern

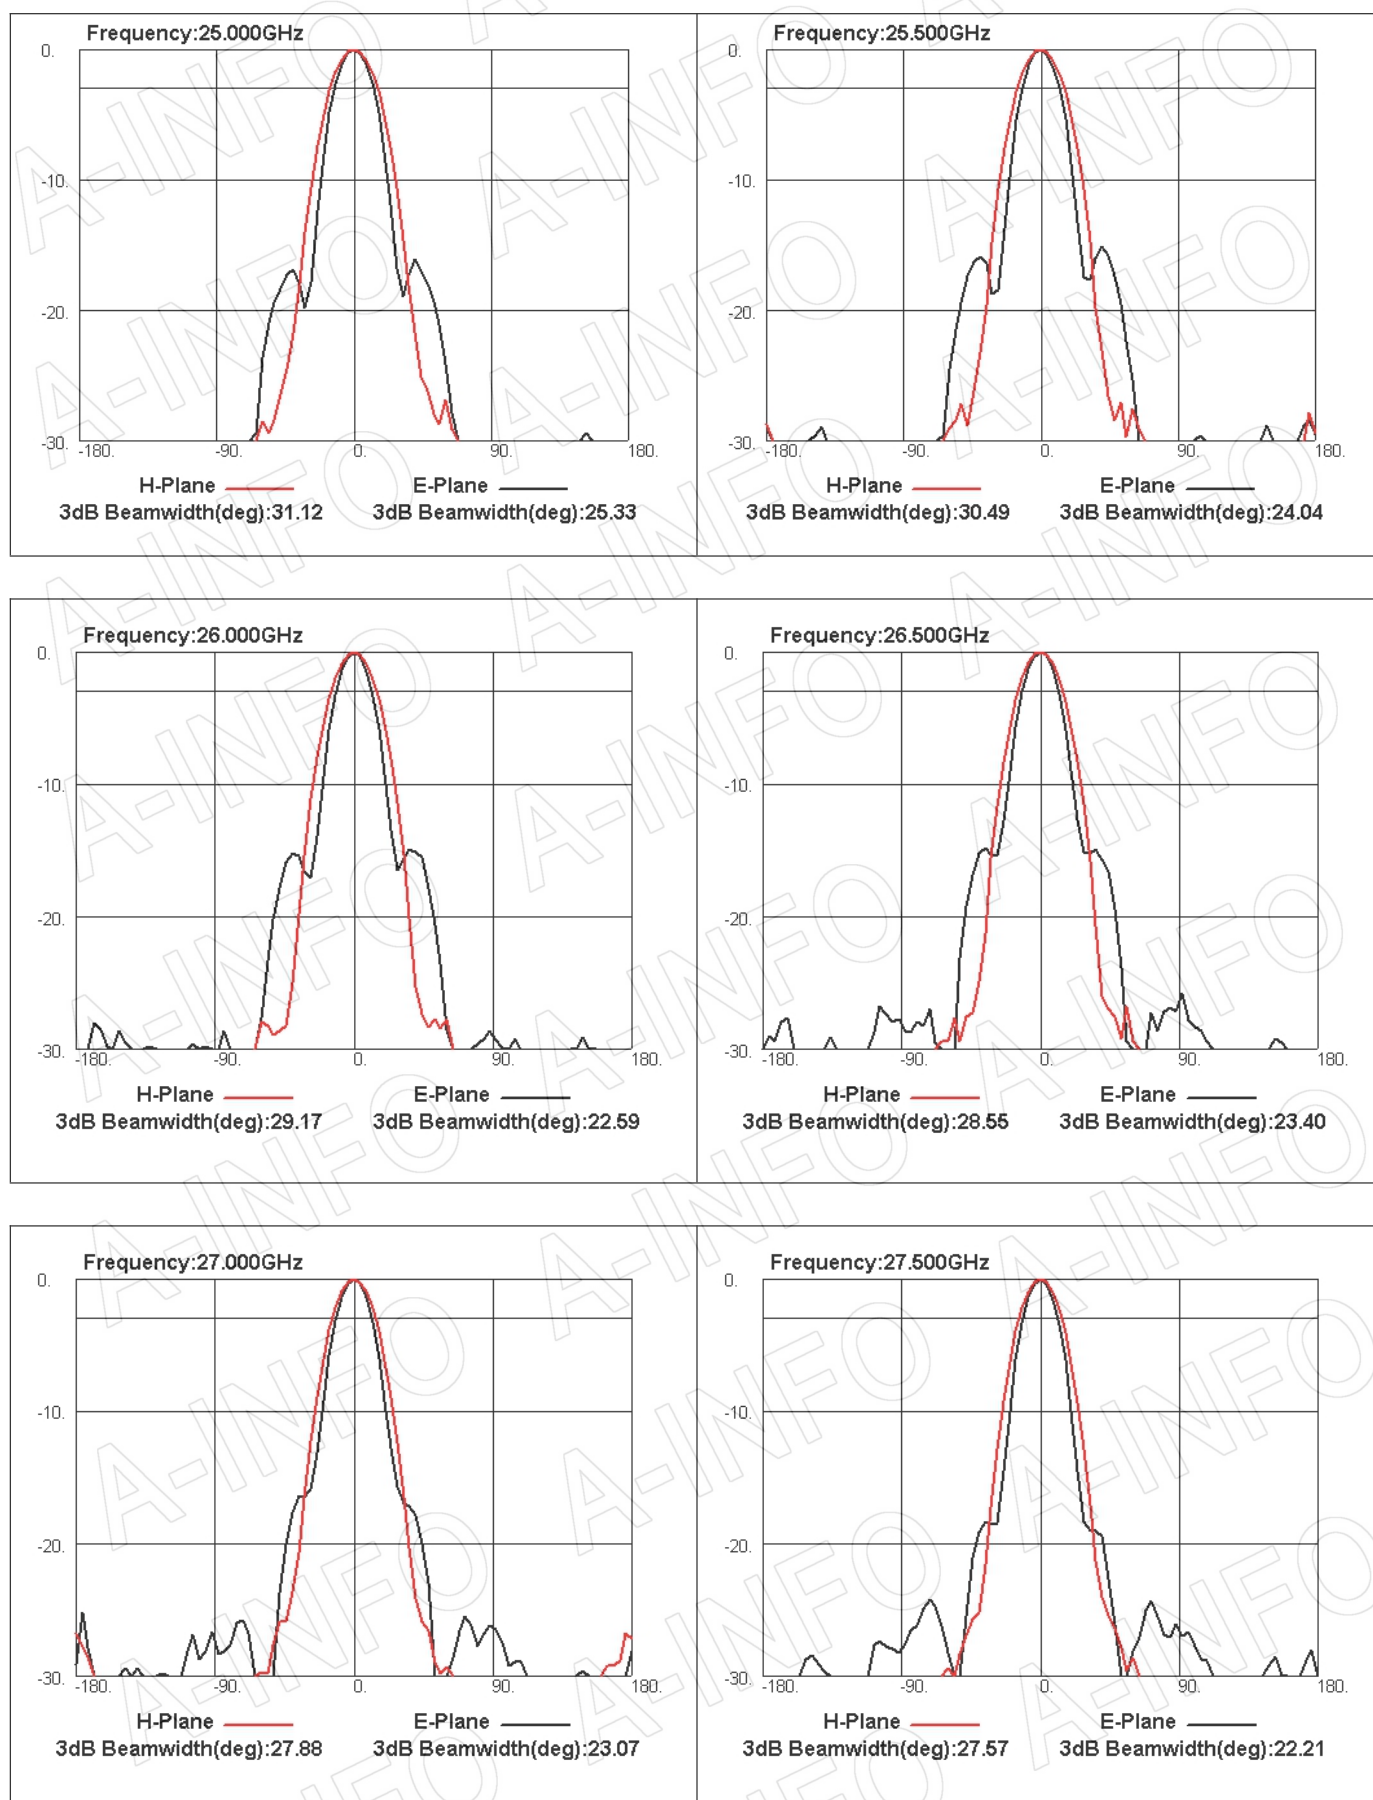

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 8 of 10

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

