

For reference only. See data sheet for the detailed specifications.


Technical Specification



Frequency Range(GHz)	2.20 – 3.30
Waveguide	WR340
Gain(dBi)	15 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 24 Typ.
	H Plane: 22 Typ.
Side Lobe Level(dB)	E Plane: 30 Min.
	H Plane: 35 Min.
Cross Pol. Isolation(dB)	40 Typ.
VSWR	A Type: 1.20:1 Max.
	C Type: 1.50:1 Max.
Output	A Type: FDP26(UDR26)
	C Type: N-Female or SMA-Female or 7/16-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	A Type: 407.3 x 407.3 x 609.4
	C Type: 407.3 x 407.3 x 701.4
Net Weight(Kg)	A Type: 3.42 Around
	C Type: 4.05 Around

Outline Drawing (Size: mm)

FDP26 Output (P/N: LB-DG-340-15-A)

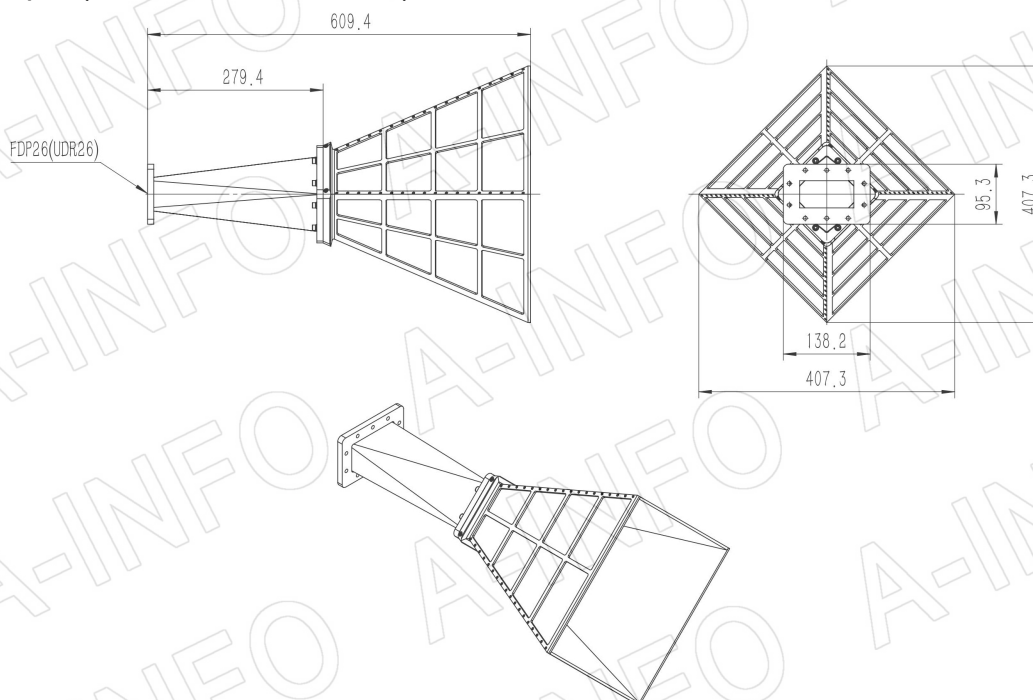

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 1 of 7

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


N-Female Output (P/N: LB-DG-340-15-C-NF)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

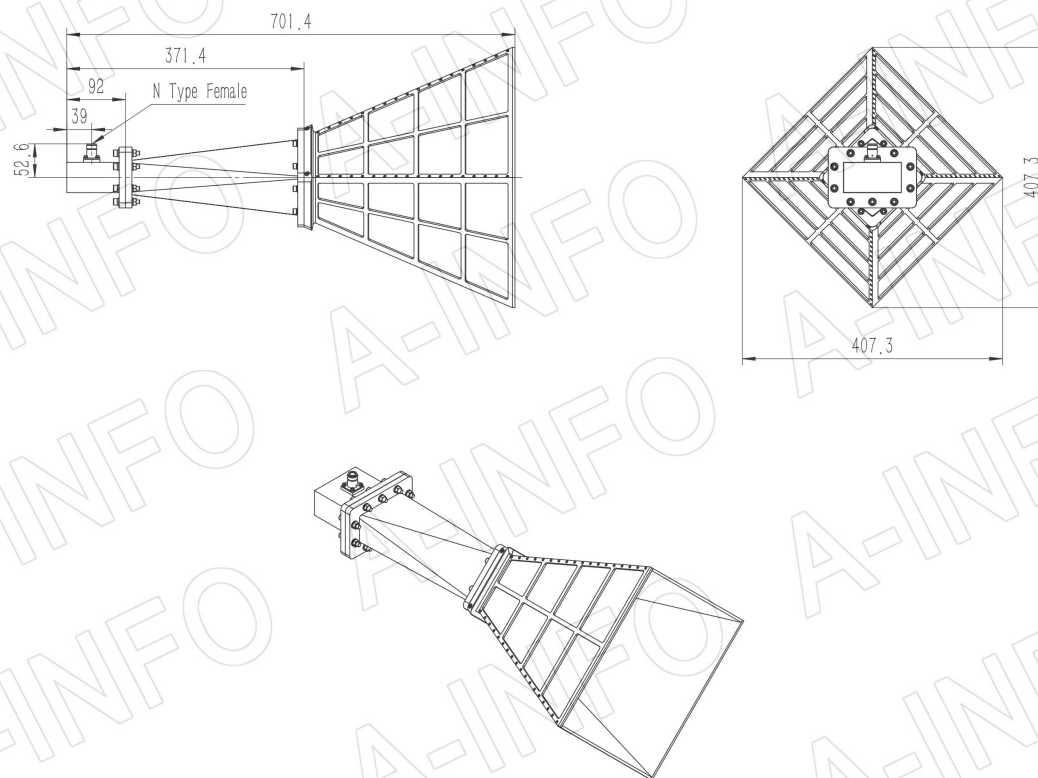

N-Female Output with Round Mounting Bracket (Option, P/N: LB-DG-340-15-MB)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

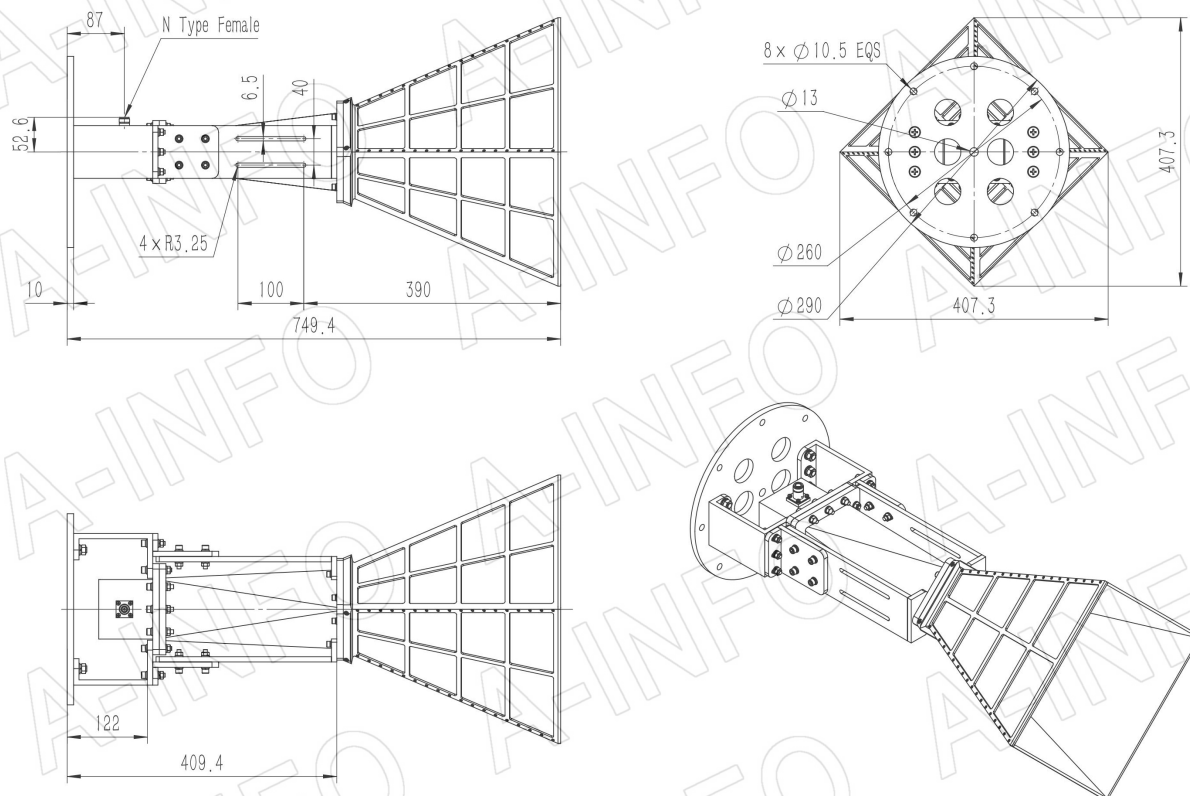

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 2 of 7

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com



Flange Drawing (Size: mm)

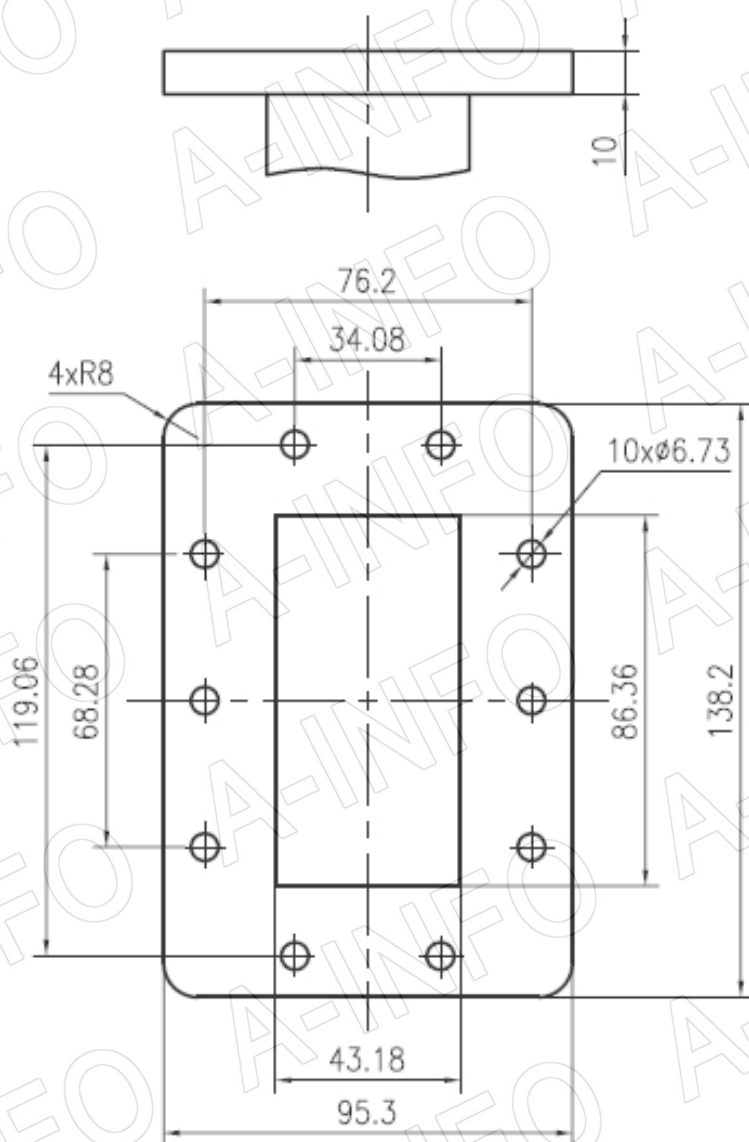


FDP26

Test Results


1. Gain & Antenna Factor

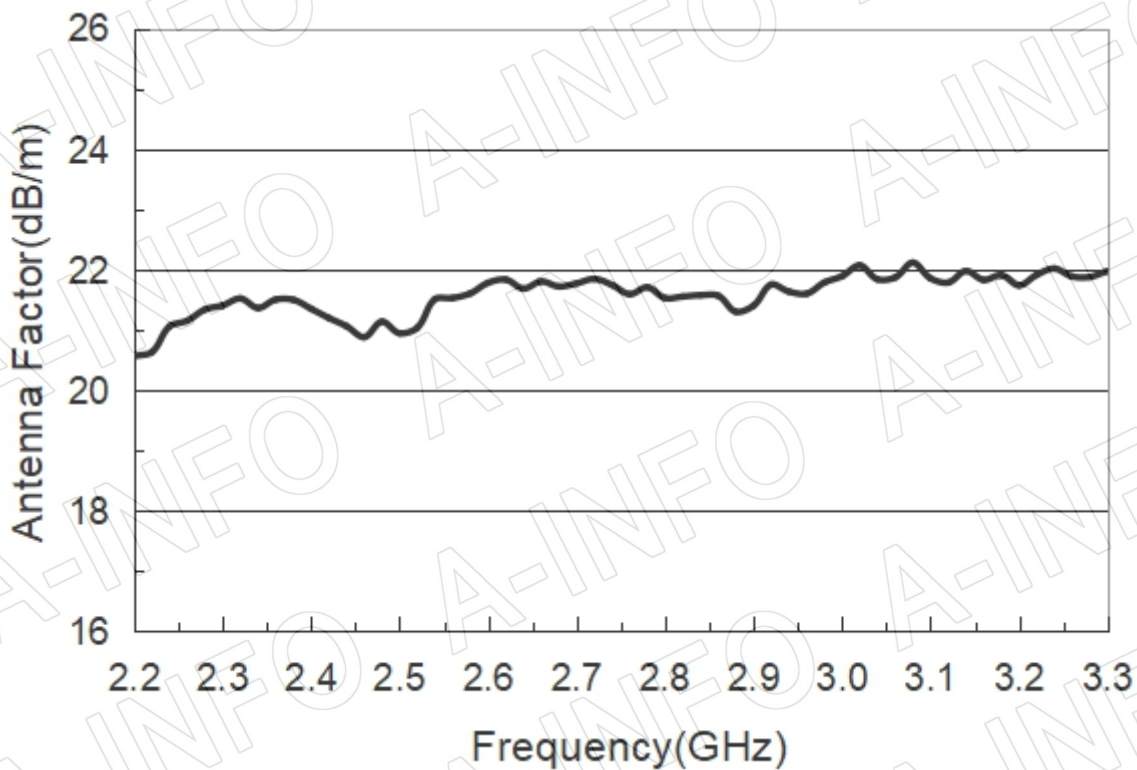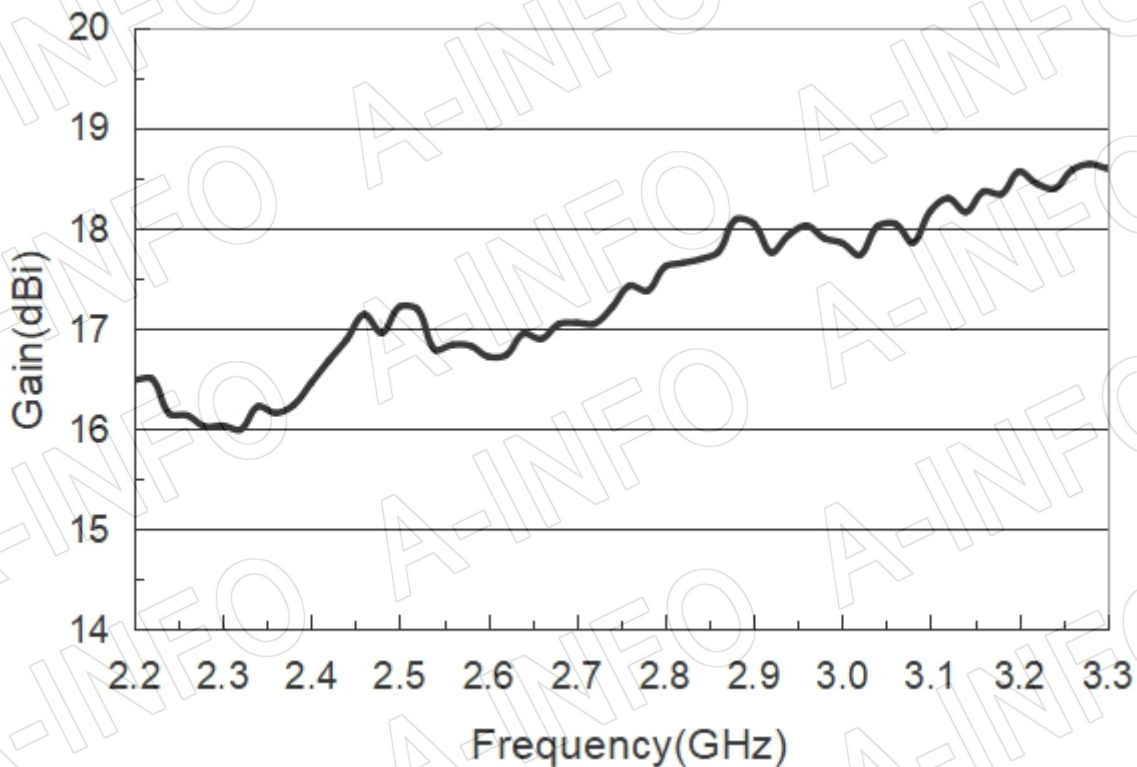


2. Cross Polarization Isolation

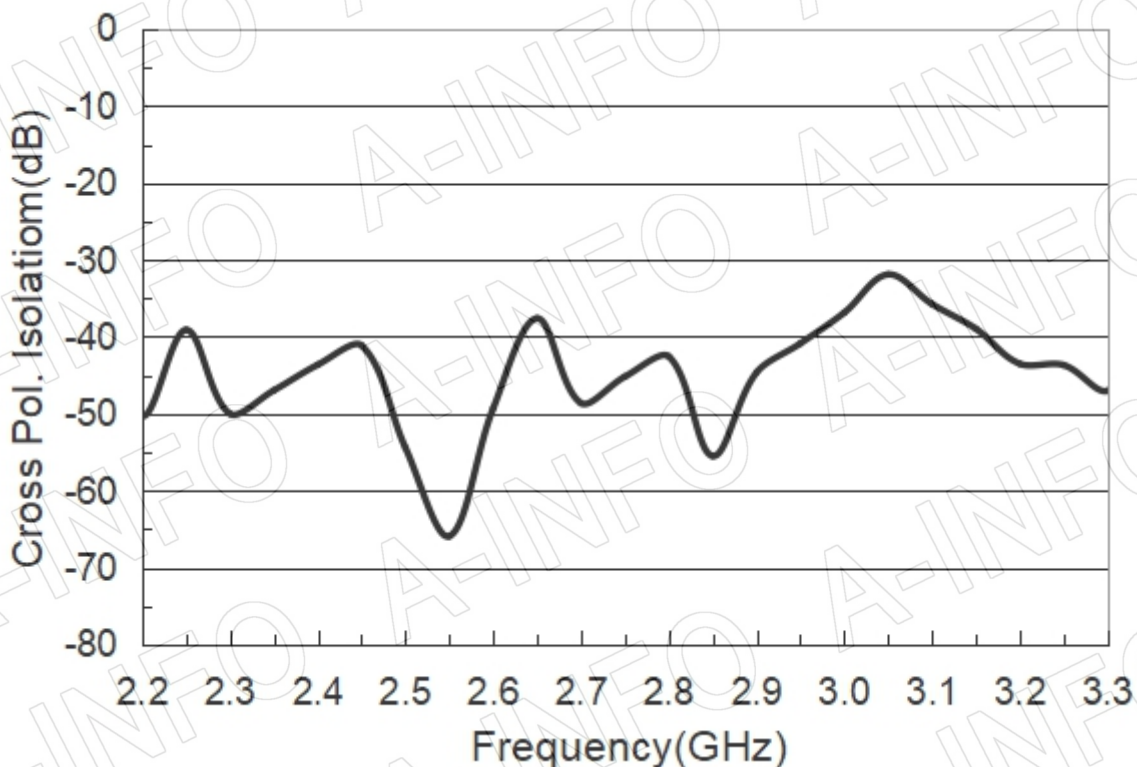

3. VSWR_A Type

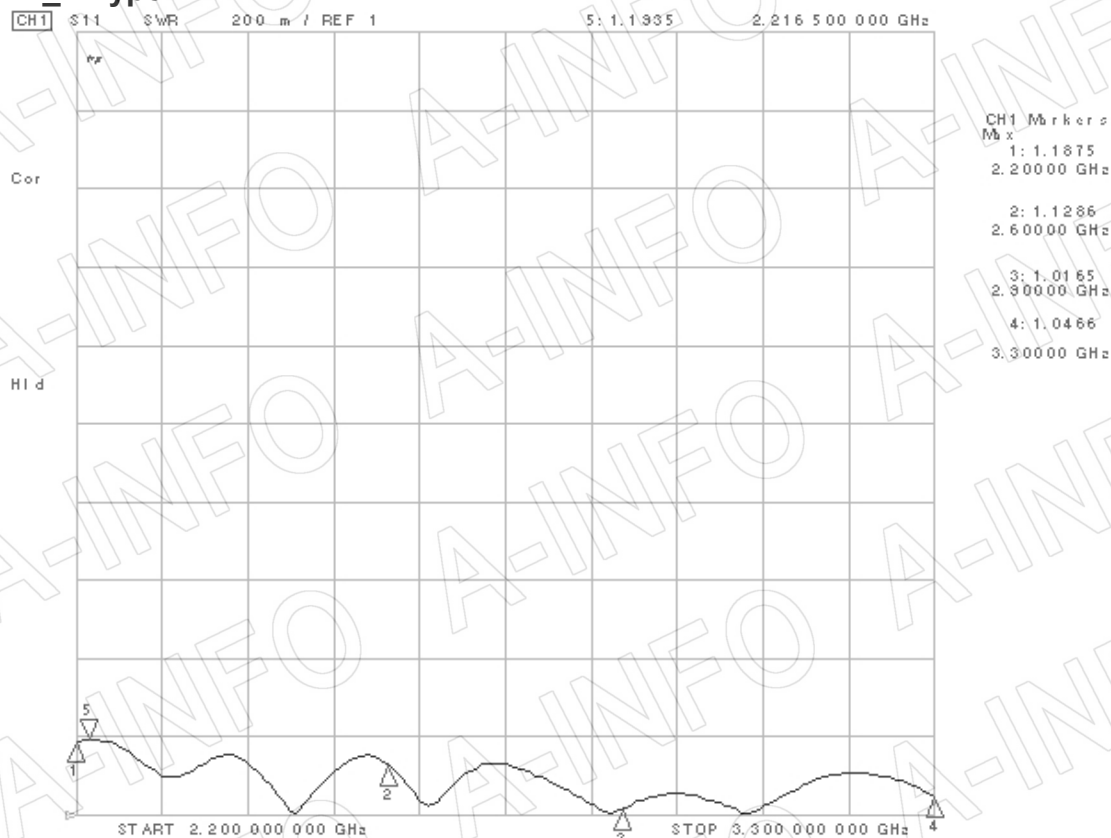

VSWR_C Type

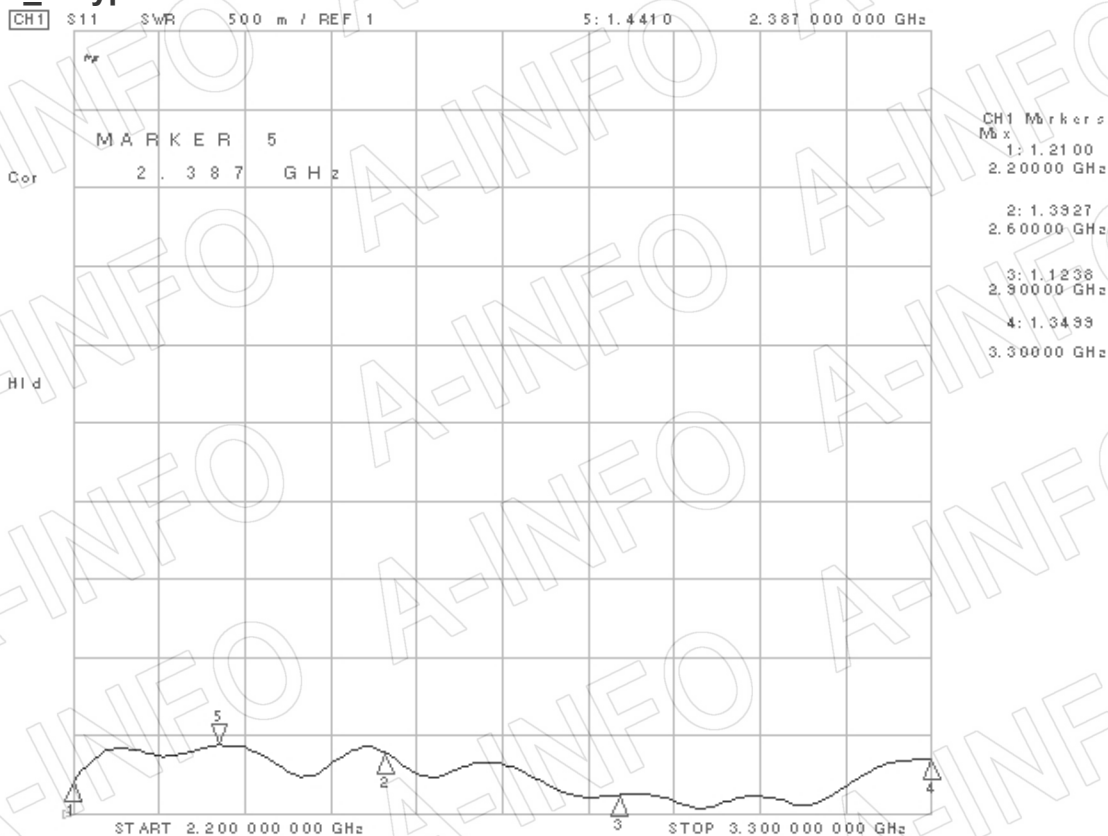

4. Pattern

