


For reference only. See data sheet for the detailed specifications.


Technical Specification

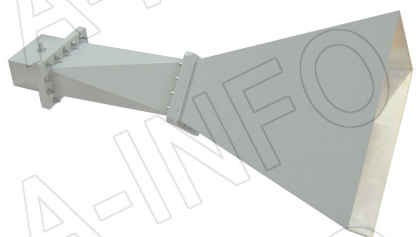

Frequency Range(GHz)	0.96 – 1.45
Waveguide	WR770
Gain(dBi)	15 Typ.
Polarization	Linear
3dB Beamwidth(deg)	E Plane: 29 Typ.
	H Plane: 27 Typ.
Side Lobe Level(dB)	E Plane: 25 Min.
	H Plane: 25 Min.
Cross Pol. Isolation(dB)	35 Typ.
VSWR	A Type: 1.20:1 Max.
	C Type: 1.50:1 Max.
Output	A Type: FDP12(UDR12)
	C Type: N-Female or SMA-Female or 7/16-Female
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	A Type: 840.6 x 840.6 x 1148
	C Type: 840.6 x 840.6 x 1314
Net Weight(Kg)	A Type: 14.7 Around
	C Type: 18.0 Around

Outline Drawing (Size: mm)

FDP12 Output (P/N: LB-DG-770-15-A)

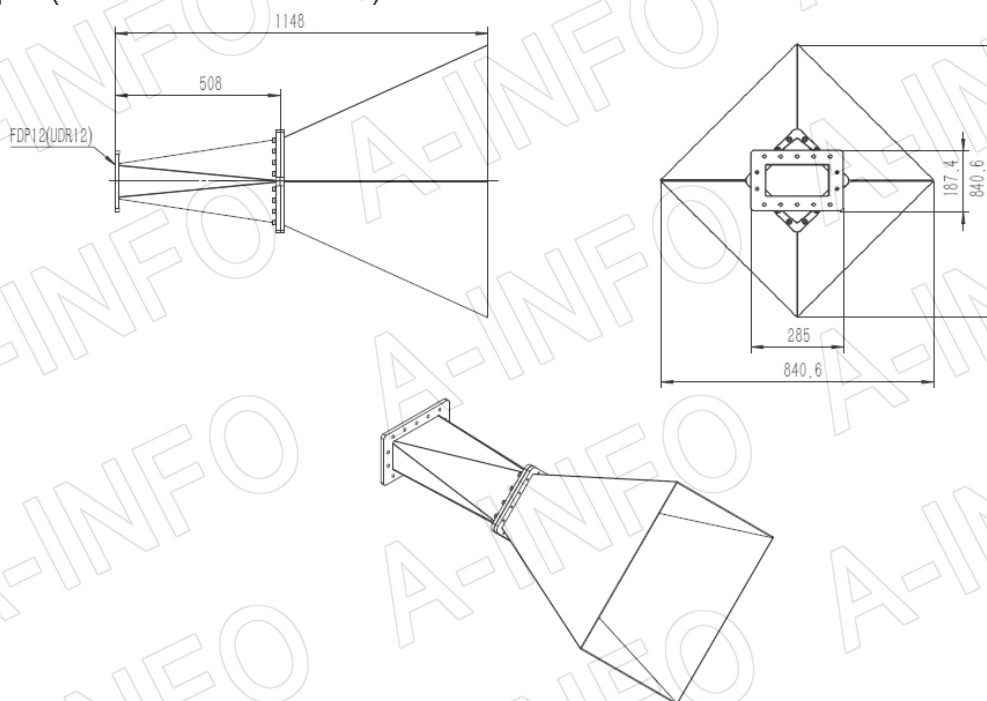

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608


Page 1 of 7

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


N-Female Output (P/N: LB-DG-770-15-C-NF)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

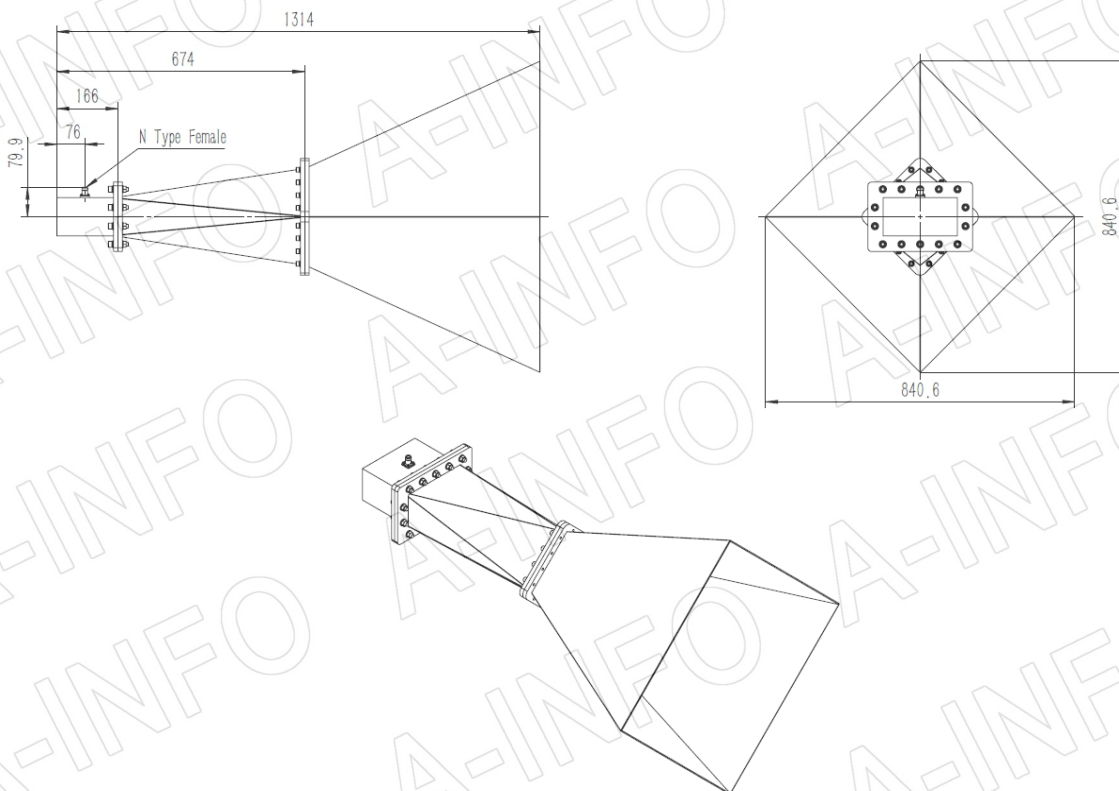


N-Female Output with Round Mounting Bracket (Option, P/N: LB-DG-770-15-MB)

For SMA-Female or 7/16-Female output outline drawing, please contact A-INFO.

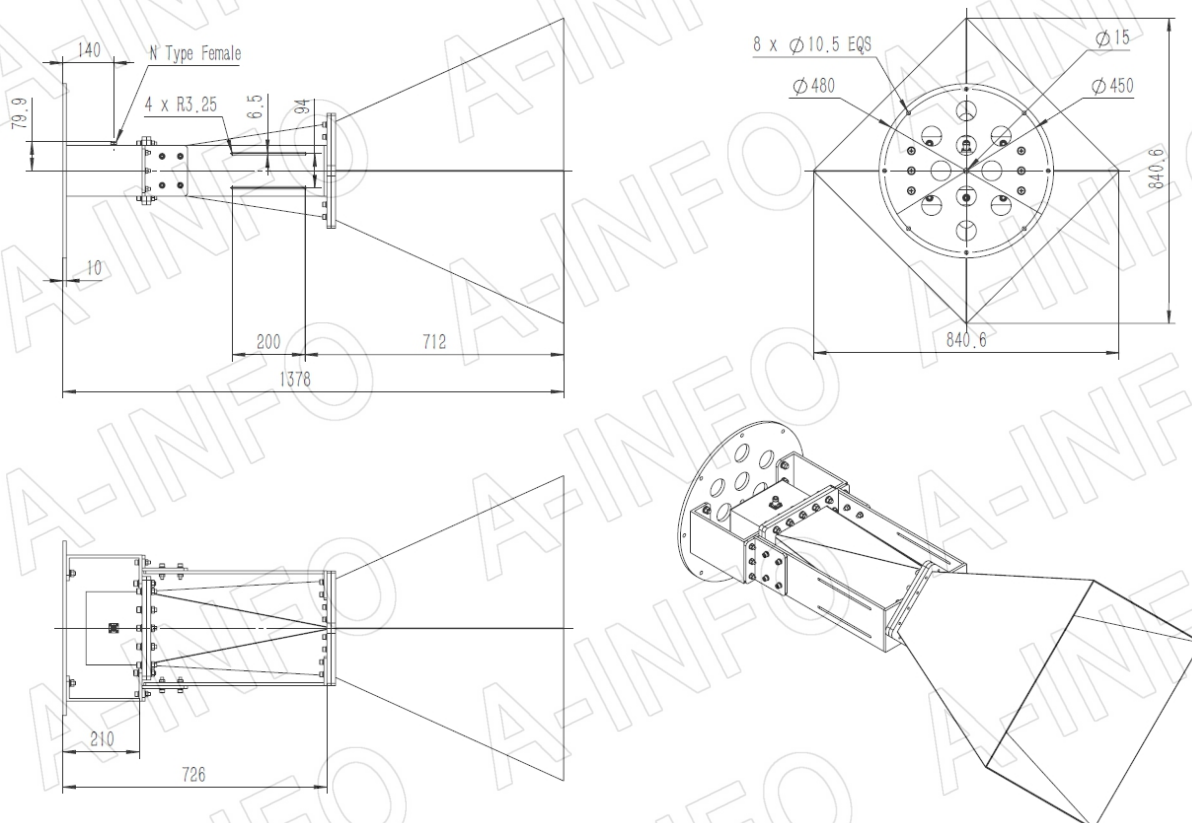



Flange Drawing (Size: mm)

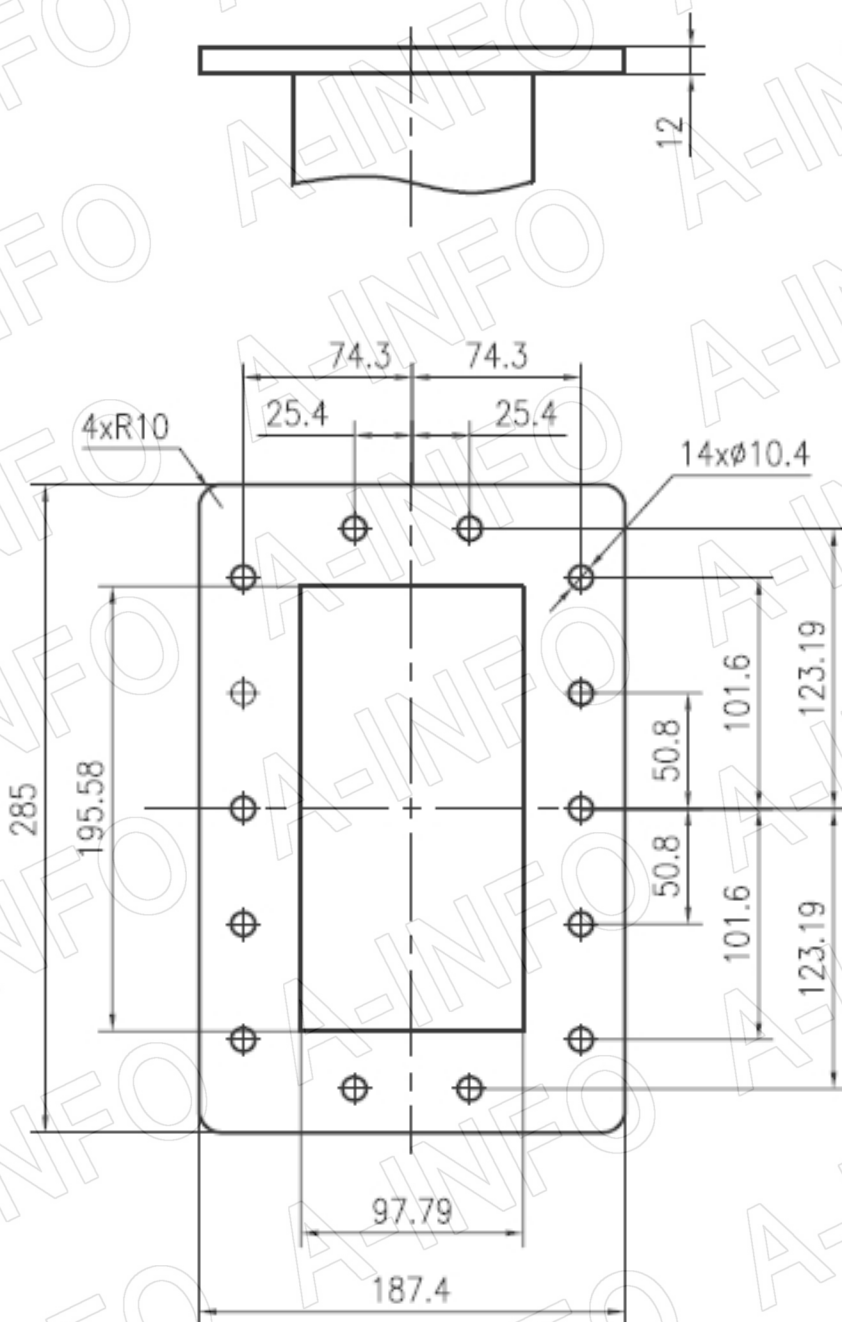


FDP12

Test Results


1. Gain & Antenna Factor

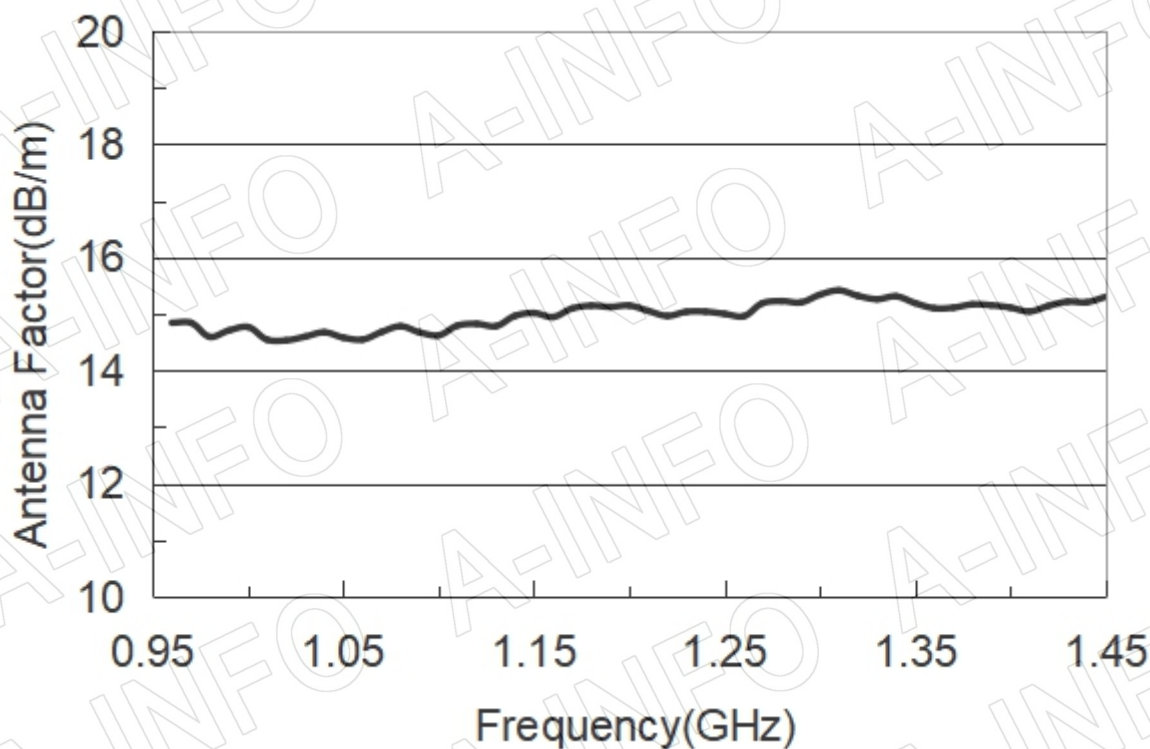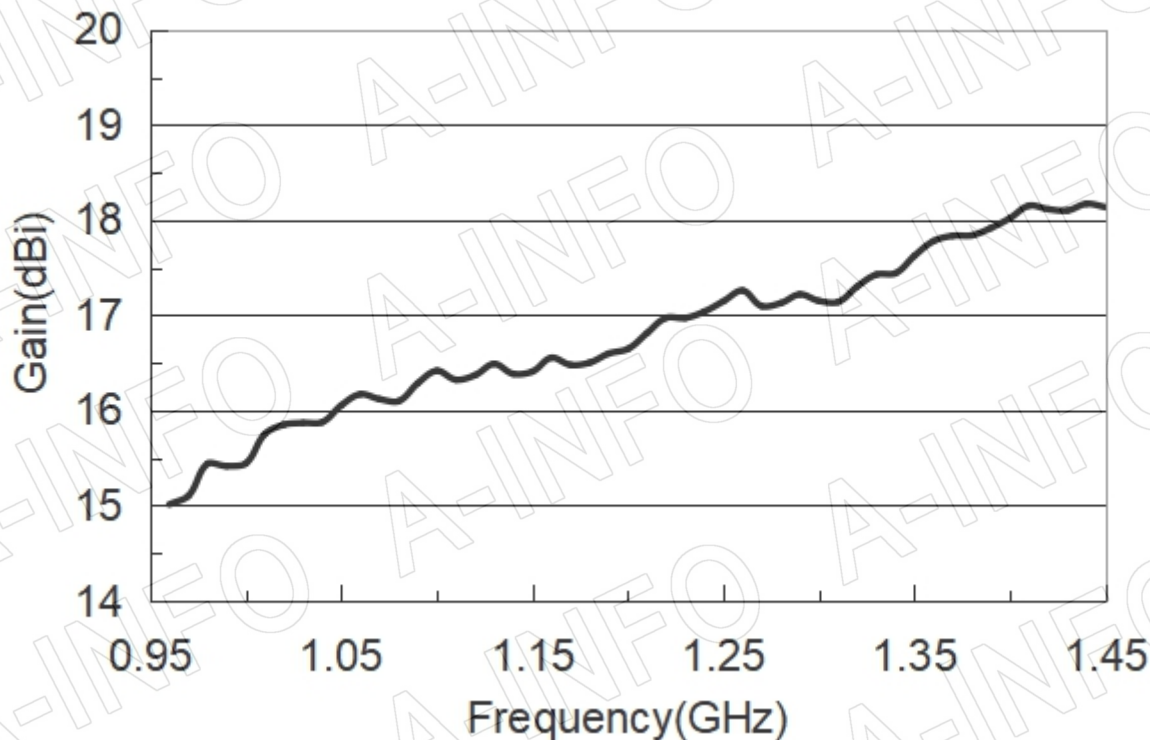


2. Cross Polarization Isolation

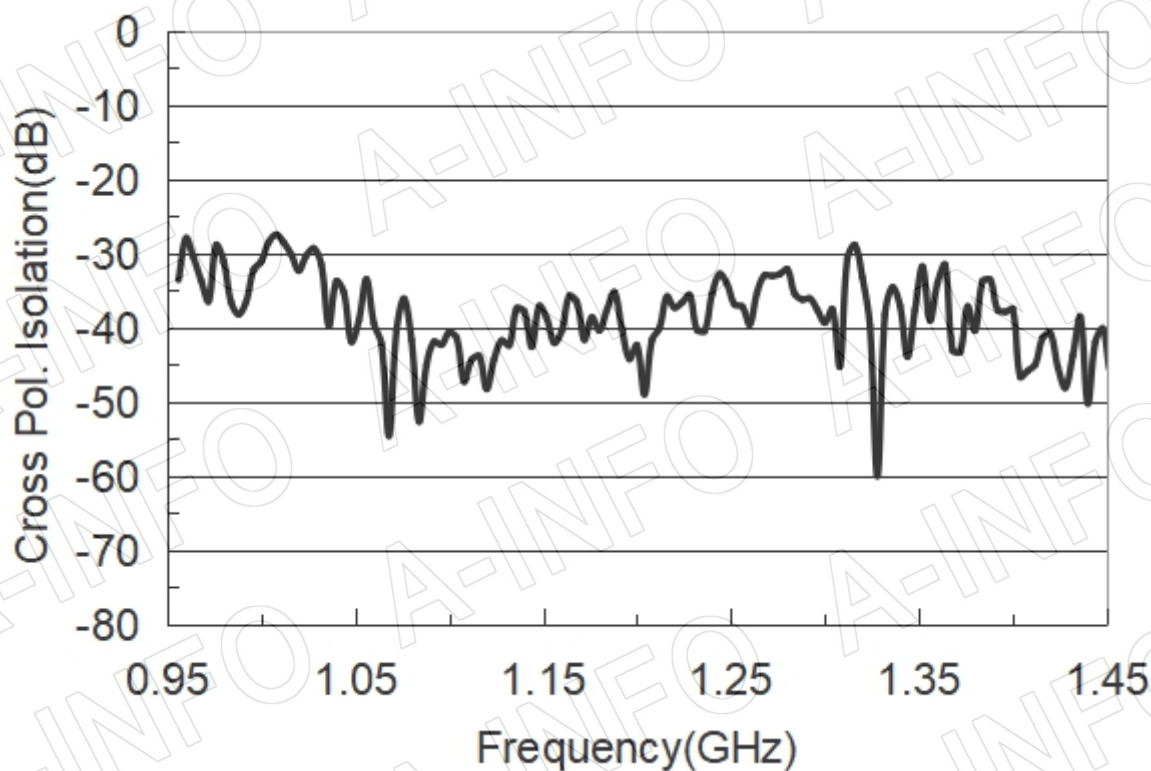

3. VSWR(C Type)

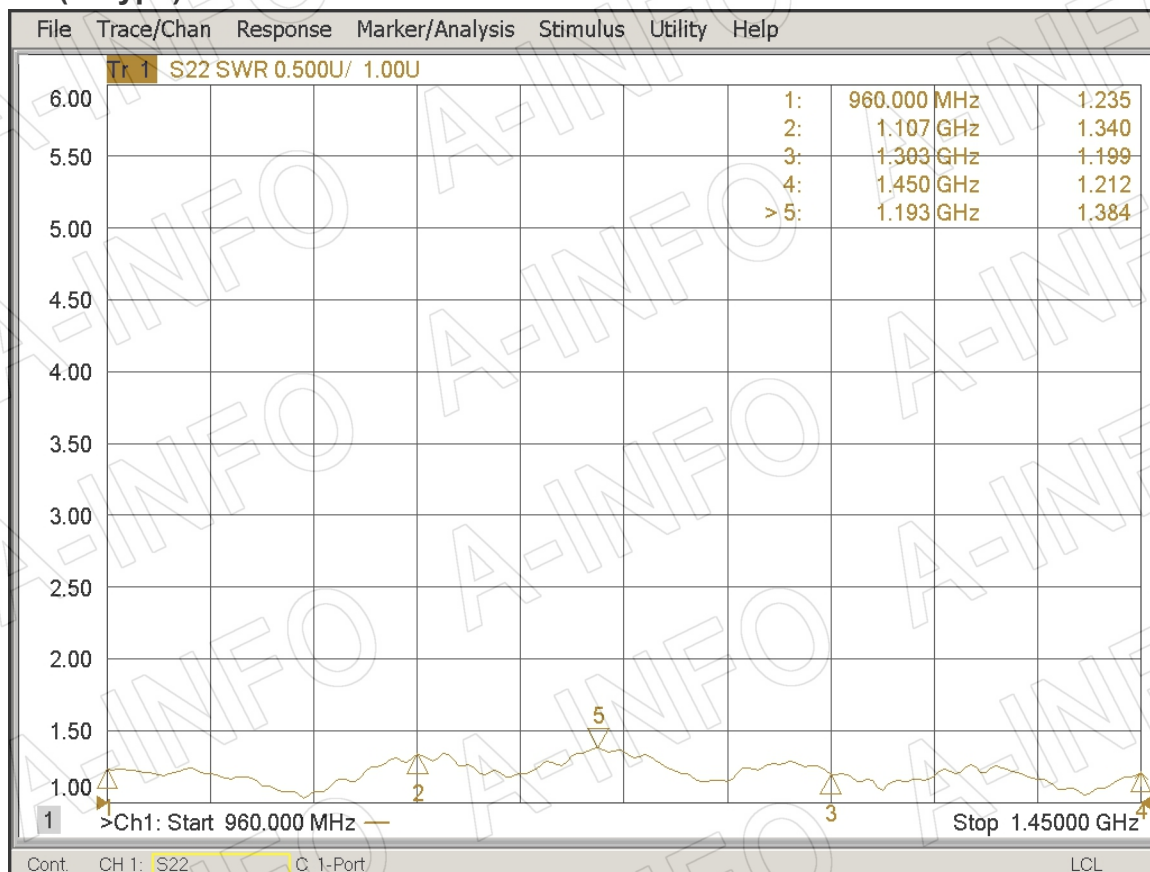

4. Pattern

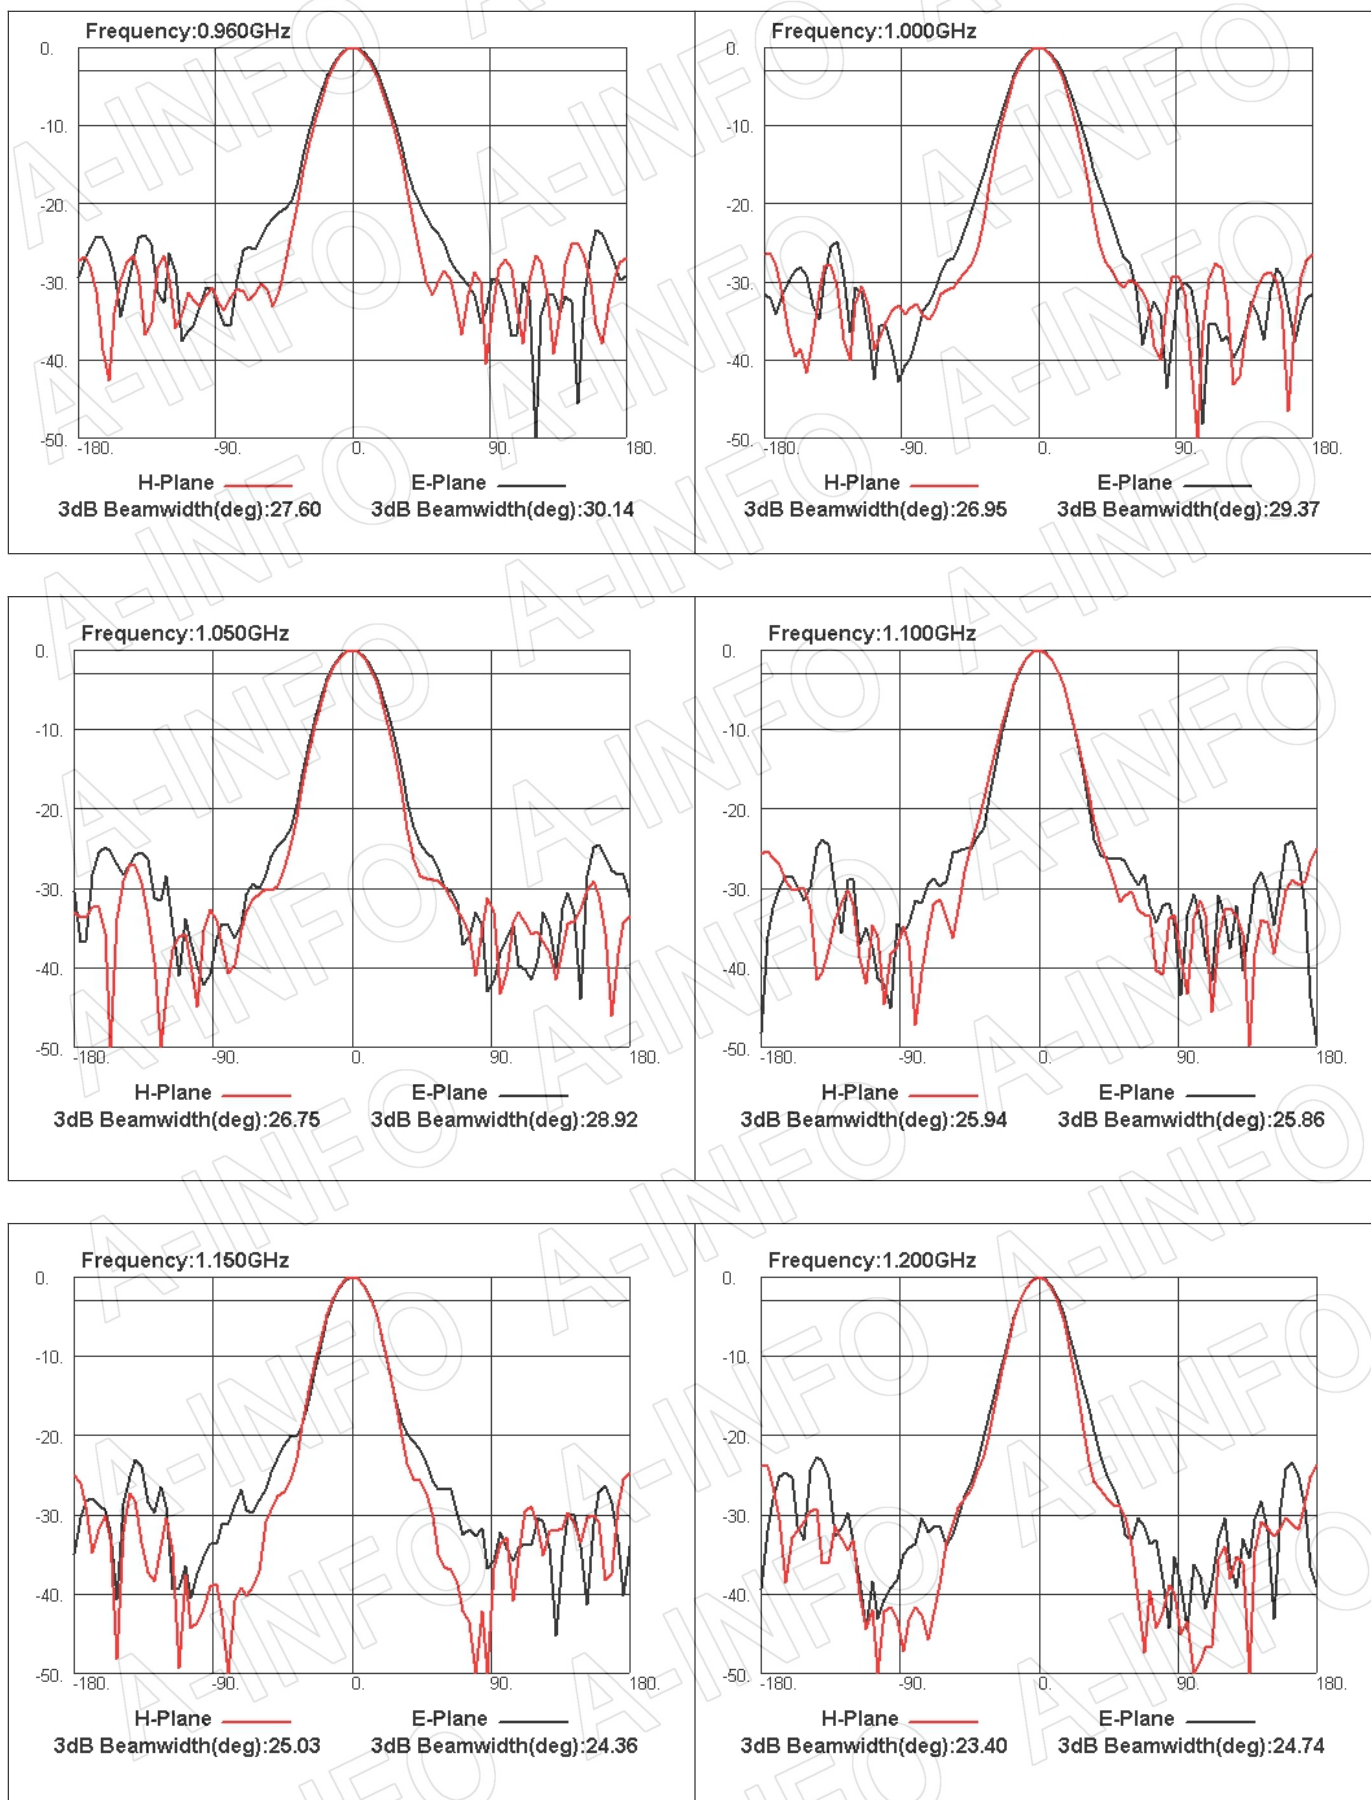

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 6 of 7

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

