

# QBF-1000-1700-50

## 1~1.7GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	1~1.7GHz
Passband Insertion Loss:	1.7dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	50dB@DC~0.9GHz min. 50dB@1.8~2.2GHz min.
VSWR:	1.7 max.
Average Power:	2W max.
Impedance:	50Ω

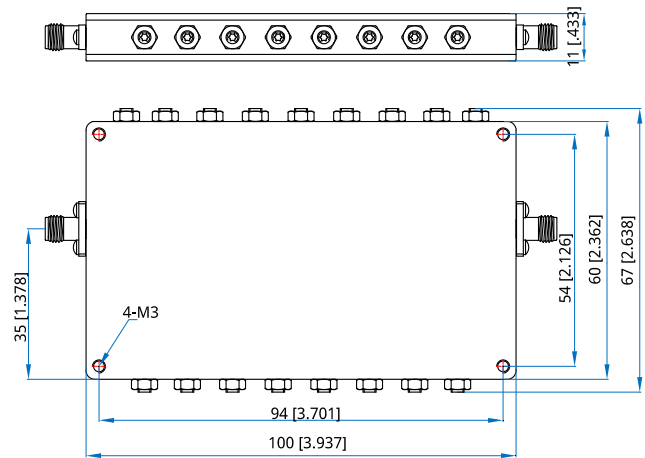
**Mechanical**

Size*1:	100*67*11mm 3.937*2.638*0.433in
RF Connectors:	2.92mm female
Mounting:	4-M3 through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-1000-1700-50**

Customization is available upon request.