

QBF-10000-12000-40

10~12GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10~12GHz
-1dB Passband Width:	2000MHz min.
Passband Insertion Loss:	1.5dB max.
VSWR:	1.6 max.
Stopband Attenuation:	40dBc@9.5GHz min. 40dBc@12.5GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

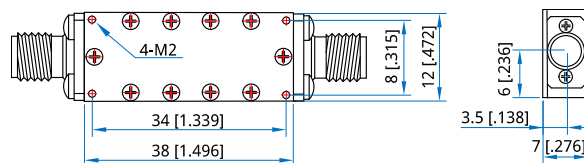

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QBF-10000-12000-40

Customization is available upon request.