

QBF-1100-1600-50

1.1~1.6GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1.1~1.6GHz
Passband Insertion Loss:	2.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dB@0.9GHz min. 50dB@1.8GHz min.
Impedance:	50Ω

Mechanical


Size*1:	35*12*8mm 1.378*0.472*0.315in
Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

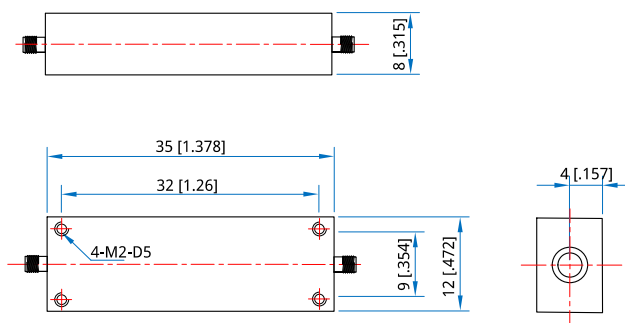

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-1100-1600-50

Customization is available upon request.