

QBF-12800-15800-60

9.8~12.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	12.8~15.8GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.22 max.
Stopband Attenuation:	60dB@DC~9.85GHz min. 60dB@18.96~23GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size* ¹ :	60*16*12mm 2.362*0.63*0.472in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

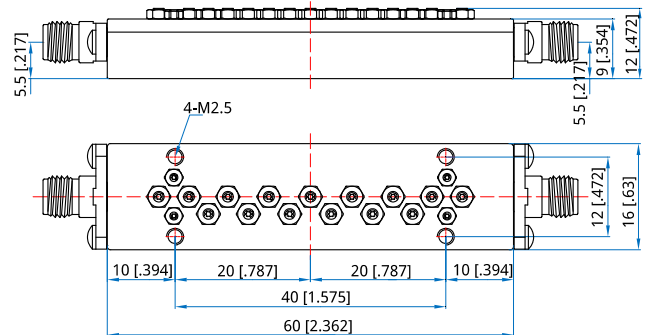

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-12800-15800-60

Customization is available upon request.