

QBF-18000-20000-30

18~20GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	18~20GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	30dB@DC~17.2GHz min. 30dB@20.8~30GHz min.


Mechanical

RF Connectors:	2.92 Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

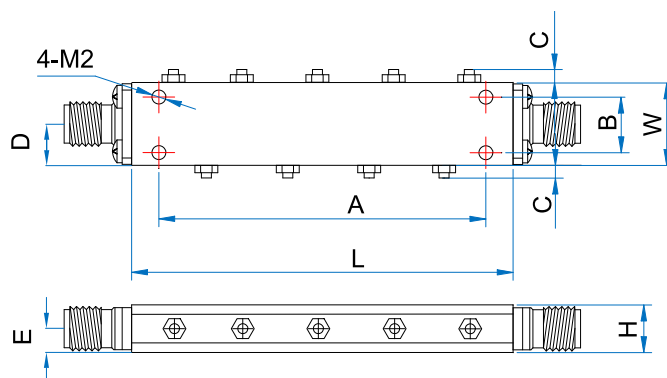

Size:	L	W	H	A	B	C	D	E
mm:	51	13	7.5	43	9.2	2	6.5	3.75
in:	2.008	0.512	0.295	1.693	0.362	0.079	0.256	0.148

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QBF-18000-20000-30

Customization is available upon request.