

## QBF-2000-3800-50

2~3.8GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	2~3.8GHz
Passband Insertion Loss:	1.7dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	50dB@DC~1.7GHz min. 50dB@4.1~5GHz min.
VSWR:	1.7 max.
Average Power:	2W max.
Impedance:	50Ω

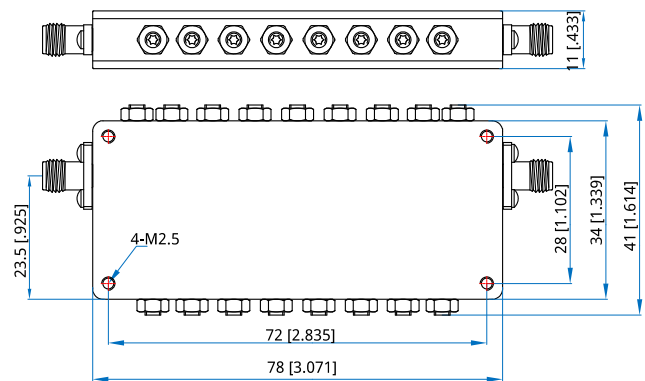
**Mechanical**

Size* <sup>1</sup> :	78*41*11mm 3.071*1.614*0.433in
RF Connectors:	2.92mm female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-2000-3800-50**

Customization is available upon request.