

QBF-2025-2085-40

2025~2085MHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2025~2085MHz
Insertion Loss:	1dB max.
VSWR:	1.3 max.
Stopband Attenuation:	40dBc@2200~2300MHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4- Φ 2.8mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

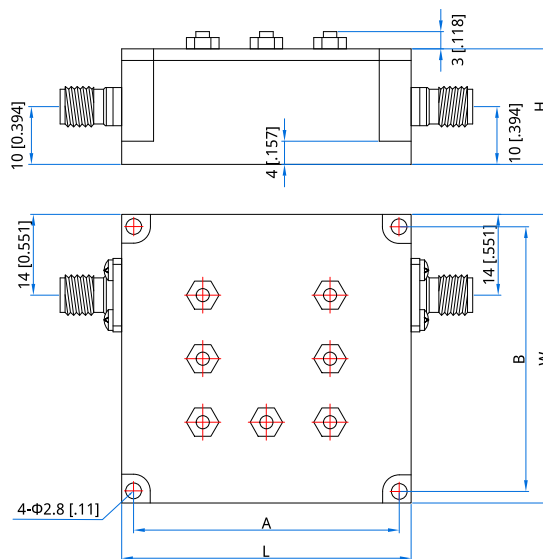

Size	L	W	H	A	B
mm	50	50	20	45	45
in	1.969	1.969	0.787	1.772	1.772

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QBF-2025-2085-40

Customization is available upon request.