

QBF-2025-2120-50

High Stopband Rejection

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.025~2.12GHz
Passband Ripple:	1dB max.
Insertion Loss at CF:	2dB max.
VSWR:	1.3dB max.
Stopband Attenuation:	50dB@1.95GHz min. 50dB@2.2~2.3GHz min.

Mechanical


Size*1:	75*52*21mm 2.953*2.047*0.827in
RF Connectors:	SMA Female
Mounting:	4* Φ 2.8 Through-hole

[1] Exclude connectors.

Environmental

Working Temperature:	-40~+75°C
Storage Temperature:	-55~+85°C

Outline Drawings

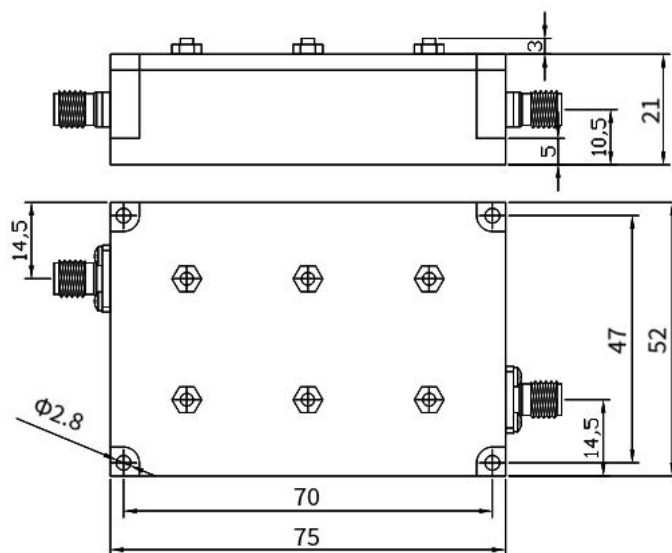

Unit: mm

Tolerance: ± 0.2 mm

How To Order

QBF-2025-2120-50

Customization is available upon request.