

QBF-2200-2400-30

2.2~2.4GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.2~2.4GHz
Passband Width:	200MHz
Center Insertion Loss:	2.2dB max.
-1.5dB Bandwidth:	200MHz min.
Stopband Attenuation:	40dB@DC~2.1GHz 30dB@2.5~4.5GHz min.
VSWR:	1.5 max.

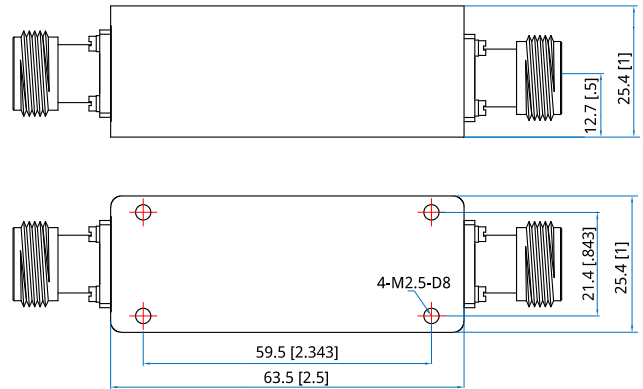
Mechanical

Size*1:	63.5*25.4*25.4mm 2.5*1*1in
RF Connectors:	N female
Mounting:	4-M2.5, depth 8mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2200-2400-30

Customization is available upon request.