

## QBF-2240-2280-30

2240~2280MHz, 30dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	2240~2280MHz
Insertion Loss:	1.1dB max.
Passband Ripple:	0.8dB max.
VSWR:	1.25 max.
Stopband Attenuation:	30dB@2220~2300MHz min.


### Mechanical

RF Connectors:	N Female, SMA Female
Mounting:	4- $\Phi$ 2.8mm through-hole

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

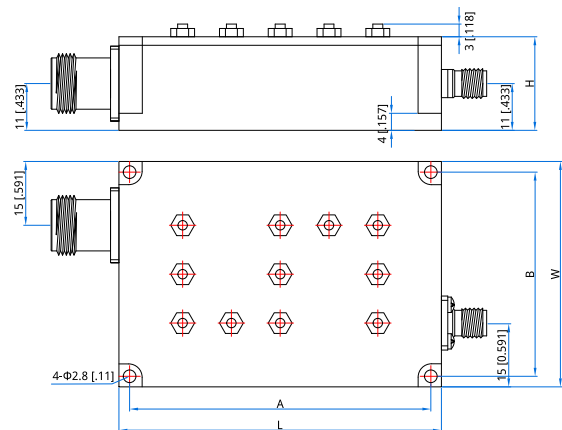

Size	L	W	H	A	B
mm	76	53	22	71	48
in	2.992	2.087	0.866	2.795	1.89

Unit: mm [in]

Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

### How To Order

**QBF-2240-2280-30**

Customization is available upon request.