

# QBF-23000-30000-85


23GHz~30GHz, 85dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

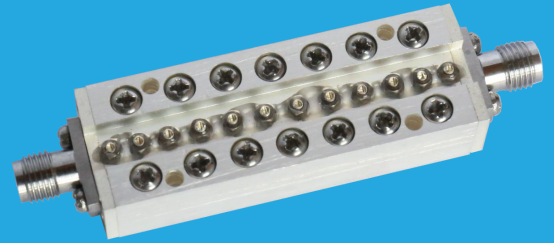

**Electrical**

Passband:	23~30GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	85dBc@19GHz min. 85dBc@34GHz min.


**Mechanical**

RF Connectors:	2.92mm Female
Mounting:	4*Φ2.2mm through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

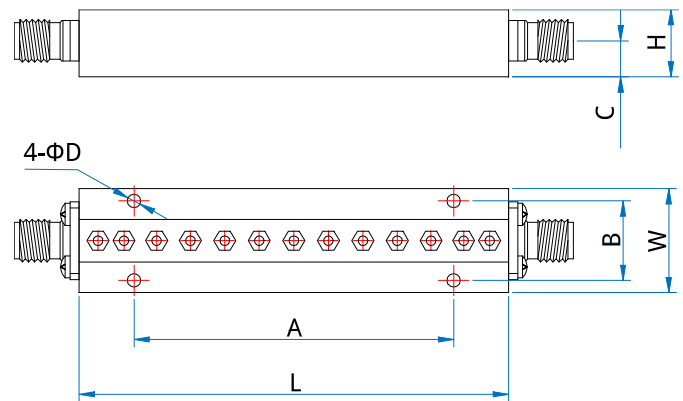

Size	L	W	H	A	B	C	D
mm	50	17	10	31	13	5.1	2.2
in	1.969	0.669	0.394	1.220	0.512	0.201	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-23000-30000-85**

Customization is available upon request.