

## QBF-24000-26000-35

24~26GHz, 35dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	24~26GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	35dBc@DC~23GHz min. 35dBc@27~40GHz min.

**Mechanical**

Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

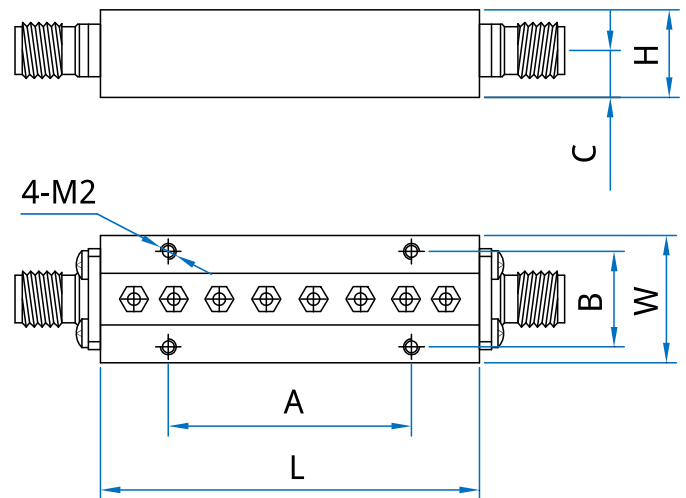
**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**How To Order**

**QBF-24000-26000-35**

Customization is available upon request.

**Outline Drawings**


Size	L	W	H	A	B	C
mm	45.5	16	11	28.5	12	5.9
in	1.791	0.63	0.433	1.122	0.472	0.232

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]