

QBF-24000-33000-60

24GHz~33GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

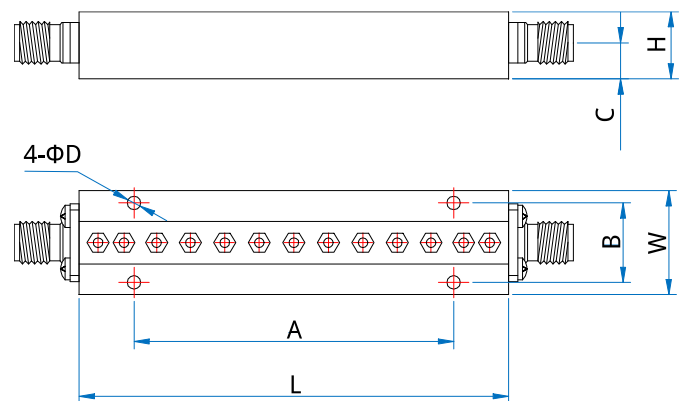
| | |
|--------------------------|--|
| Passband: | 24~33GHz |
| Passband Insertion Loss: | 2dB max. |
| VSWR: | 1.8 max. |
| Stopband Attenuation: | 60dBc@DC~21GHz min. 60dBc@37~40GHz min. |

Mechanical

| | |
|----------------|------------------------------|
| RF Connectors: | 2.92mm Female |
| Mounting: | 4* Φ 2.2mm through-hole |

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Outline Drawings


| Size | L | W | H | A | B | C | D |
|------|-------|-------|-------|-------|-------|-------|-------|
| mm | 51.5 | 16 | 11 | 33.5 | 11 | 6.2 | 2.2 |
| in | 2.028 | 0.630 | 0.433 | 1.319 | 0.433 | 0.244 | 0.087 |

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBF-24000-33000-60

Customization is available upon request.