

QBF-24750-27750-66

High Stopband Rejection

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Center Frequency:	26.25GHz
1dB Band Width:	1.5GHz min.
Return Loss:	16dB min.
Insertion Loss:	1dB max.
Stopband Attenuation :	70dBc@23.83GHz min. 66dBc@28.67GHz min.
Group Delay Variation:	1ns max.

Mechanical


Size ^{*1} :	52*15*8mm 2.047*0.591*0.315in
RF Connectors:	2.92mm Female
Mounting:	4*Φ3mm Through Hole

[1] Exclude connectors.

Environmental

Working Temperature:	0~+50°C
----------------------	---------

Outline Drawings

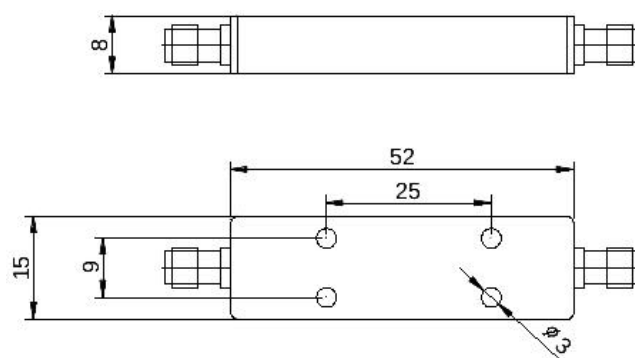

Unit: mm

Tolerance: ±0.2mm

How To Order

QBF-24750-27750-66

Customization is available upon request.