

QBF-27485-31315-50

27.485GHz~31.315GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation



Electrical

Passband:	27.485~31.315GHz
Passband Insertion Loss:	2.0dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dBc@26GHz min. 50dBc@32.3GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4*Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

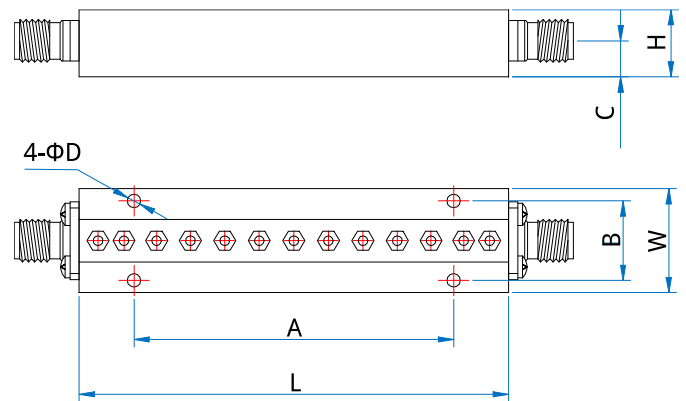

Size	L	W	H	A	B	C	D
mm	70.4	17	11	52.4	13	5.9	2.2
in	2.772	0.669	0.433	2.063	0.512	0.232	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-27485-31315-50

Customization is available upon request.