

QBF-34500-34600-50

34.5~34.6GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	34.5~34.6GHz
3.0dB Bandwidth:	200MHz max.
Passband Insertion Loss:	3.4dB max.
Passband Ripple:	0.6dB max.
VSWR:	1.3 max.
Stopband Attenuation:	50dB@DC~34.05GHz min. 50dB@35.05~43GHz min.
Impedance:	50Ω
Average Power:	5W max.

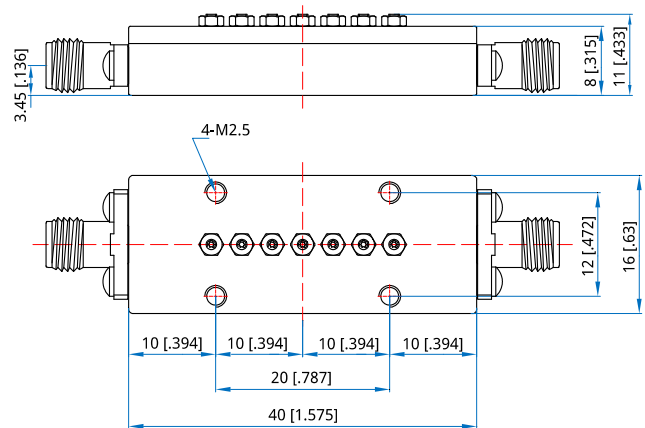
Mechanical

Size ^{*1} :	40*16*11mm 1.575*0.63*0.433in
Connectors:	2.92mm Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	+10~+30°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-34500-34600-50

Customization is available upon request.