

# QBF-430-450-30

## 0.43~0.45GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.43~0.45GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.22 max.
Stopband Attenuation:	30dB@DC~425MHz min. 30dB@455~1000MHz min.
Impedance:	50Ω
Average Power:	20W max.

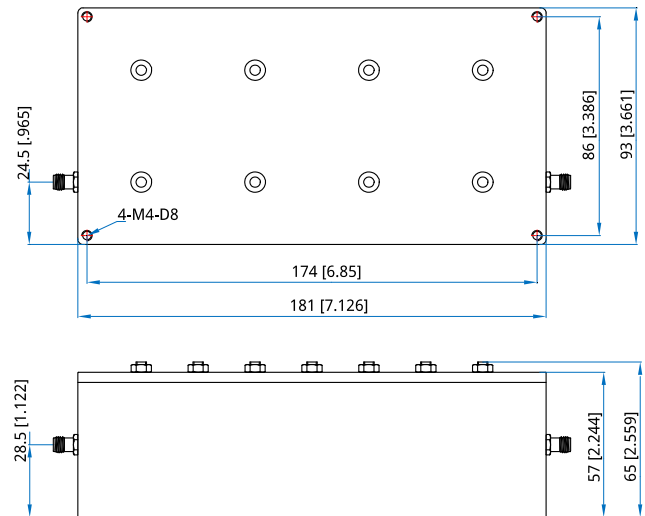
**Mechanical**

Size*1:	181*93*65mm 7.126*3.661*2.559in
Connectors:	SMA Female
Mounting:	4-M4, depth 8mm

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-430-450-30**

Customization is available upon request.