

# QBF-46000-52000-50

## 46~52GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

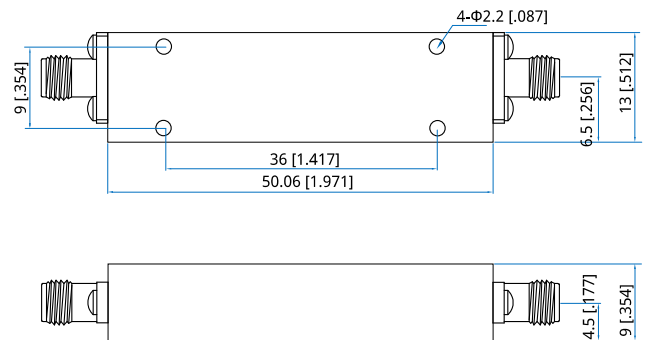
**Electrical**

Passband:	46~52GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	70dB@30~40GHz min. 50dB@DC~21GHz min.

**Mechanical**

Size <sup>*1</sup> :	50.06*13*9mm 1.971*0.512*0.354in
Connectors:	2.4mm Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-46000-52000-50**

Customization is available upon request.