

QBF-5700-5900-45

5.7~5.9GHz, 45dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	5.7~5.9GHz
1dB Passband Width:	200MHz min.
Insertion Loss:	1.8dB max. @5.8GHz
Stopband Attenuation:	45dBc@5.5GHz min. 45dBc@6.1GHz min.
VSWR:	1.5 max.

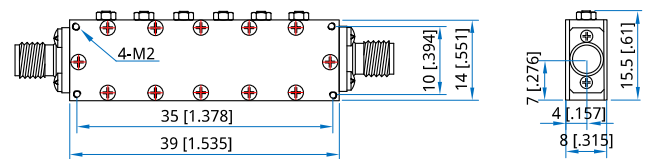
Mechanical

Size ^{*1} :	39*15.5*8mm 1.535*0.61*0.315in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-5700-5900-45

Customization is available upon request.