

## QBF-5841-6249-50

5.841~6.249GHz, 50dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	5.841~6.249GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	50dBc@DC~4.85GHz min. 50dBc@7.15~15GHz min.


### Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

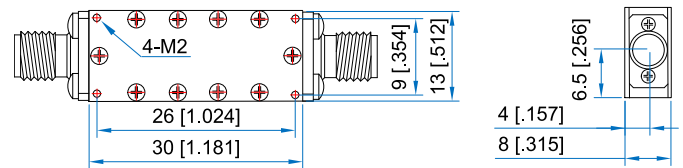

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

### How To Order

**QBF-5841-6249-50**

Customization is available upon request.