

QBF-7650-8350-50

7.65~8.35GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	7.65~8.35GHz
Passband Insertion Loss:	3dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dBc@7.15GHz min. 50dBc@8.5GHz min.


Mechanical

RF Connectors:	SMA Female, removable Φ0.38mm inner pin
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

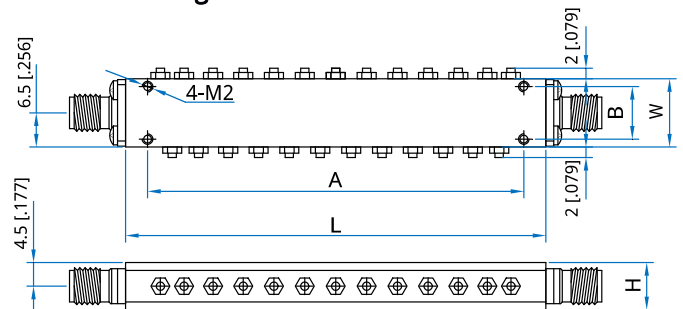

Size:	L	W	H	A	B
mm:	80	13	9	71.6	10
in:	3.15	0.512	0.354	2.819	0.394

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-7650-8350-50

Customization is available upon request.