

QBF-9000-11700-30

9~11.7GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9~11.7GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.25 max.
Stopband Attenuation:	45dB@DC~8.1GHz min. 30dB@8.1~8.4GHz min. 45dB@12.3~12.6GHz min. 30dB@12.6~25GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	70*16*12mm 2.756*0.63*0.472in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

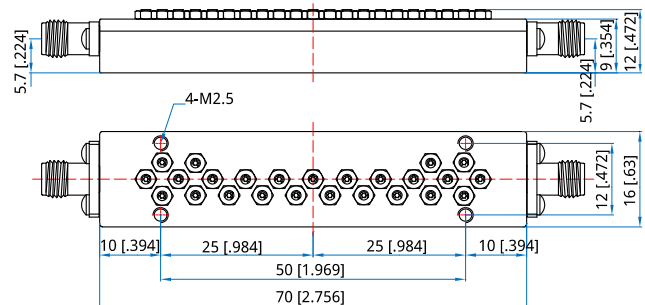

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-9000-11700-30

Customization is available upon request.