

QBF-960-1240-30

0.96~1.24GHz, 30dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	0.96~1.24GHz
-1dB Passband Width:	280MHz min.
Insertion Loss:	1.5dB max.
Stopband Attenuation:	30dBc@860MHz min. 30dBc@1350MHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

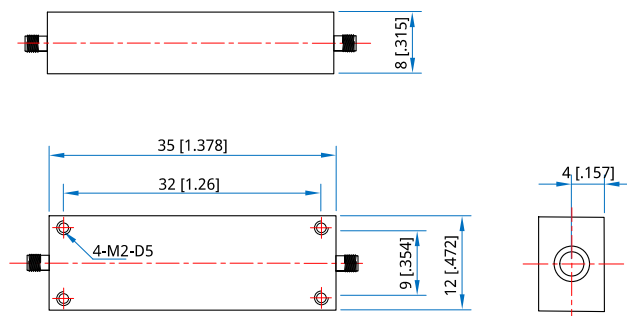

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBF-960-1240-30

Customization is available upon request.