

QDB-10-40000

10MHz~40GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range: 0.01~40GHz
 Insertion Loss: 0.8dB max.
 VSWR: 1.3 max.
 Impedance: 50Ω
 Voltage: 50V max.


Mechanical

Connectors: 2.92mm
 Mating Life Cycle: 500 cycles
 Outer Conductors: Passivated SUS303 Stainless Steel
 Dielectric: PEI
 Inner Conductors: Gold Plated Beryllium Copper

Environmental

Operating Temperature: -55~+165°C

Outline Drawings

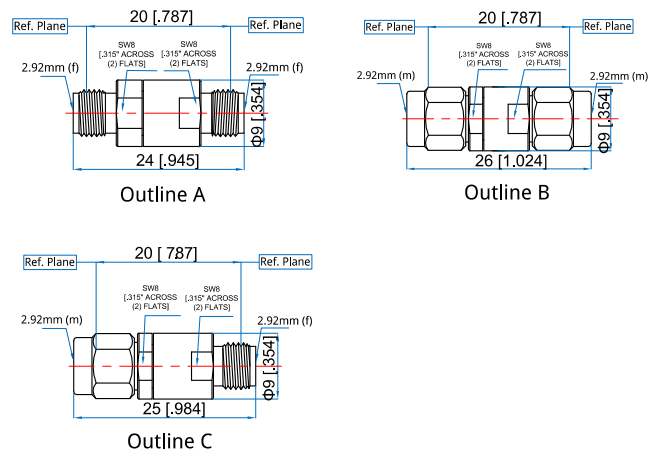

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

[QDB-10-40000-KFKF](#) - Outline A

[QDB-10-40000-KK](#) - Outline B

[QDB-10-40000-KKF](#) - Outline C

Customization is available upon request.