

## QDDC-0.5-32-K2-30-N

0.5~32MHz, 200W, 30dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	0.5~32MHz
Insertion Loss:	0.2dB max.
Coupling:	30±1dB
Directivity:	20dB min.
VSWR (Mainline):	1.1 max.
Average Power:	200W

### Mechanical

Size*1:	50.8*51*22.35mm 2*2.008*0.88in
Connectors:	N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

### Outline Drawings

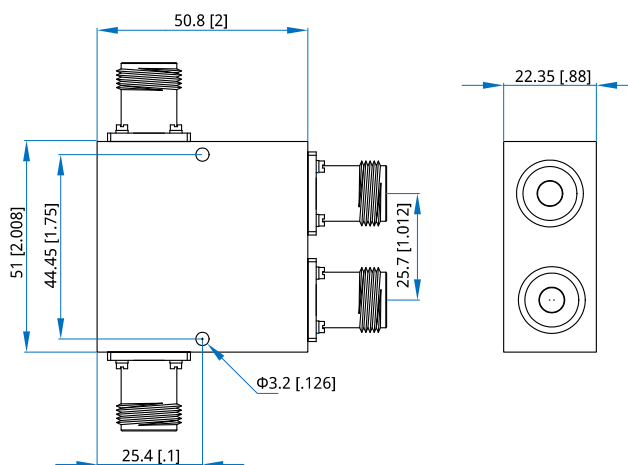

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QDDC-0.5-32-K2-30-N**

Customization is available upon request.