

## QDDC-1-10-K15-20-S

1~10MHz, 150W, 20dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 1~10MHz  
Coupling: 20±0.5dB  
VSWR: 1.2 max.  
Insertion Loss: 0.2dB max.  
Directivity: 20dB min.  
Average Power: 150W

### Mechanical


Size<sup>\*1</sup>: 51\*50.8\*22.35mm  
2.008\*2\*0.88in  
Connectors: SMA Female  
Mounting: 2-Φ3.2mm through-hole

[1] Exclude connectors

### Environmental

Operating Temperature: -45~+100°C  
Non-operating Temperature: -55~+100°C

### Outline Drawings

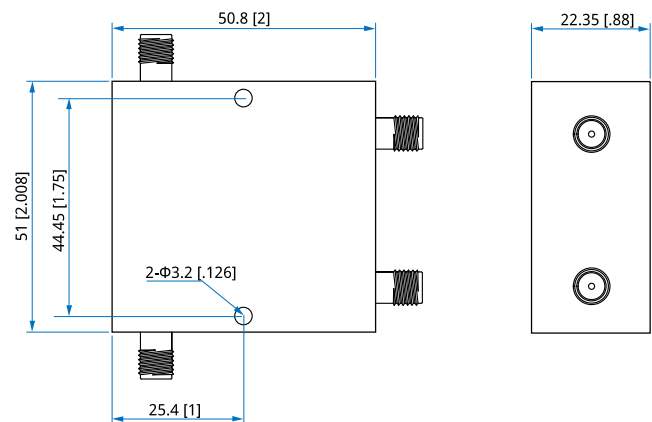

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QDDC-1-10-K15-20-S**

Customization is available upon request.