

QDDC-1000-2000-K5-30-N

1~2GHz, 500W, 30dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	1~2GHz
Coupling:	30±1dB
Coupling Flatness:	±0.8dB
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.5 max.
Insertion Loss:	0.25dB max.
Directivity:	26dB min.
Average Power:	500W

Mechanical


Size ^{*1} :	38.1*38.1*27.6mm 1.5*1.5*1.087in
Connectors:	N female
Mounting:	2-Φ3.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

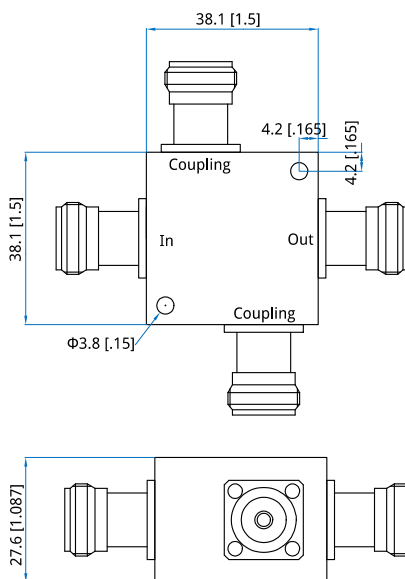

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-1000-2000-K5-30-N

Customization is available upon request.