

QDDC-2-32-1K-40-NS

2~32MHz, 1000W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

| | |
|-----------------|-------------|
| Frequency: | 2~32MHz |
| Insertion Loss: | 0.5dB max. |
| Coupling: | 40±1dB |
| Flatness: | ±0.5dB max. |
| Directivity: | 20dB min. |
| VSWR: | 1.2 max. |
| Average Power: | 1000W |

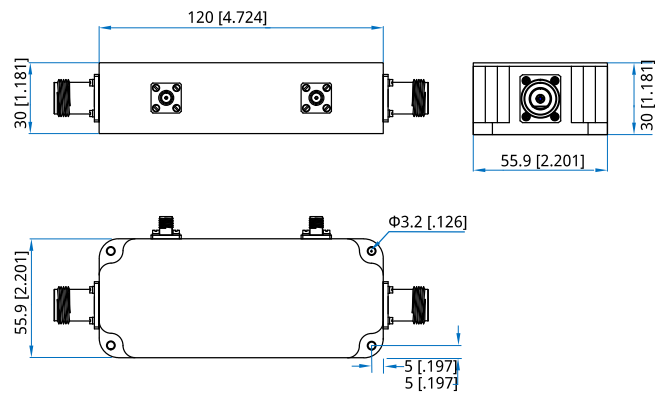
Mechanical

| | |
|----------------------|--------------------------------------|
| Size ^{*1} : | 120*55.9*30mm 4.724*2.201*1.181in |
| Connectors: | N female, SMA female |

[1] Exclude connectors

Environmental

Operating Temperature: -40~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-2-32-1K-40-NS

Customization is available upon request.