

# QDDC-2000-18000-20-40-S

## 2~18GHz, 20W, 40dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

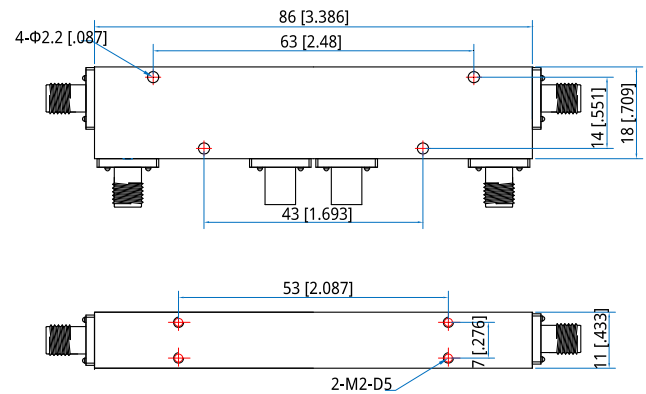
**Electrical**

Frequency:	2~18GHz
Insertion Loss:	2dB max.
Coupling:	40±1.5dB
Directivity:	7dB min.
VSWR:	1.7 max.
Average Power:	20W
Impedance:	50Ω

**Mechanical**

Size*1:	86*18*11mm 3.386*0.709*0.433in
Main Line Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and termination

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

[QDDC-2000-18000-20-40-S](#)

Customization is available upon request.