

## QDDC-2000-4000-10-10-S

2~4GHz, 10W, 10dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

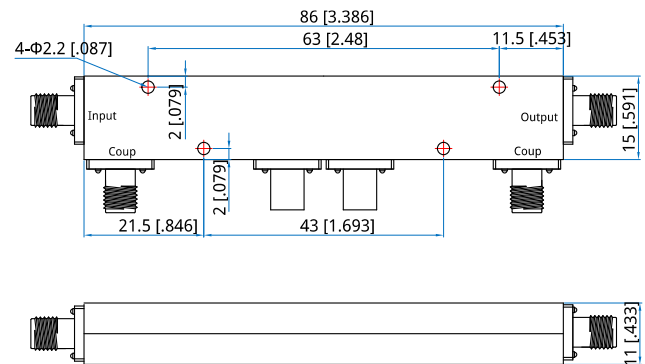
**Electrical**

Frequency:	2~4GHz
Insertion Loss:	0.8dB max.
Coupling:	10±1.0dB
Directivity:	18dB min.
VSWR:	1.2 max.
Average Power:	10W
Impedance:	50Ω

**Mechanical**

Size*1:	86*15*11mm
	3.386*0.591*0.433in
Main Line Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and termination

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

[QDDC-2000-4000-10-10-S](#)

Customization is available upon request.