

## QDDC-4000-6000-10-10-S

4~6GHz, 10W, 10dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical


Frequency:	4~6GHz
Insertion Loss:	0.8dB max.
Coupling:	10±1.0dB
Directivity:	18dB min.
VSWR:	1.2 max.
Average Power:	10W
Impedance:	50Ω

### Mechanical

Size*1:	86*15*11mm 3.386*0.591*0.433in
Main Line Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and termination

### Outline Drawings

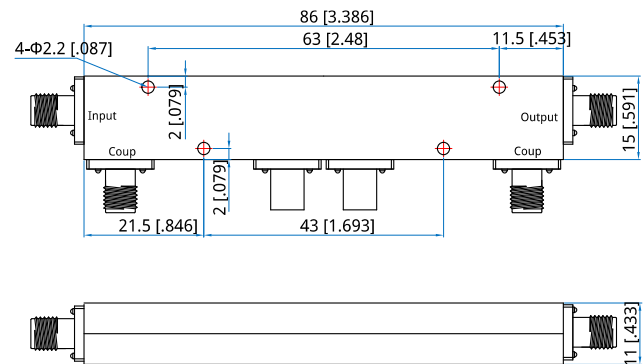

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QDDC-4000-6000-10-10-S**

Customization is available upon request.