

QDDC-4000-6000-K4-40-NS

4~6GHz, 400W, 40dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	4~6GHz
Insertion Loss:	0.6dB max.
Coupling:	40±1.5dB
VSWR:	1.3 max.
Average Power:	400W min.
Directivity:	10dB min.

Mechanical

Size*1:	50*50*22.6mm 1.969*1.969*0.89in
Connectors:	SMA Female, N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings

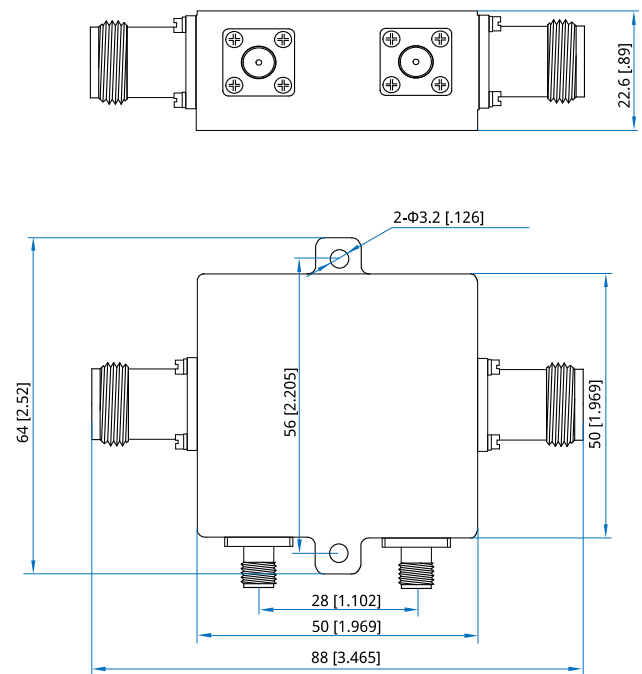

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-4000-6000-K4-40-NS

Customization is available upon request.