

## QDDC-700-6000-50-10-S

0.7~6GHz, 50W, 10dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

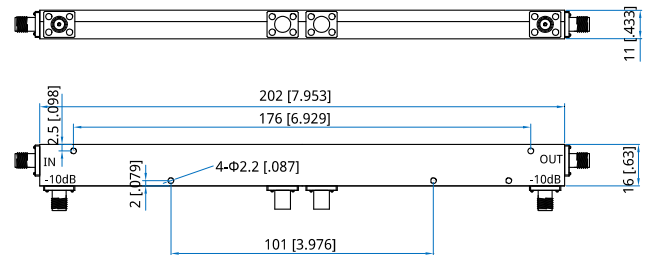
**Electrical**

Frequency:	0.7~6GHz
Insertion Loss:	2.2dB max.
Coupling:	10±1.2dB
Directivity:	12dB min.
VSWR:	1.4 max.
Average Power:	50W
Impedance:	50Ω

**Mechanical**

Size*1:	202*16*11mm 7.953*0.63*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QDDC-700-6000-50-10-S**

Customization is available upon request.