

QHC8-2000-6000-30-S

2~6GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~6GHz
Insertion Loss:	1.5dB max.
VSWR:	1.35 max.
Isolation:	18dB min.
Amplitude Balance:	±0.9dB
Phase Balance:	±11°
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size* ¹ :	82*36*11mm 3.228*1.417*0.433in
RF Connectors:	SMA Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

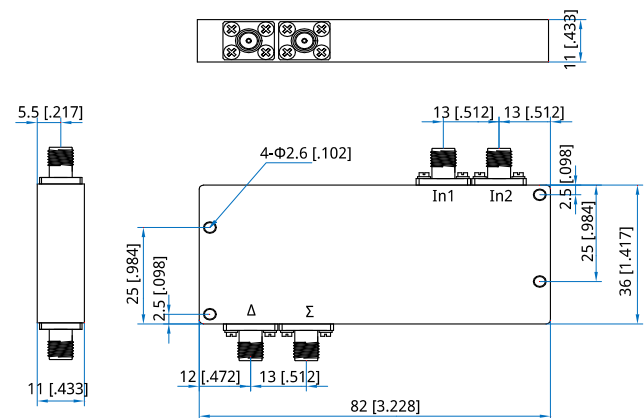

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-2000-6000-30-S

Customization is available upon request.