

QHC8-225-400-30-S

225~400MHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	225~400MHz
Insertion Loss:	1.0dB max.
VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±10°
Average Power:	30W max.
Impedance:	50Ω

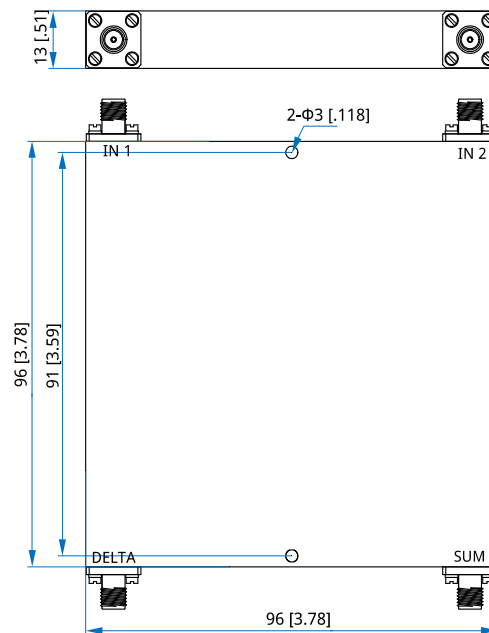
Mechanical

Size ^{*1} :	13*96*96mm 0.51*3.78*3.78in
RF Connectors:	SMA Female
Mounting:	2-Φ3mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-225-400-30-S

Customization is available upon request.