

QHC9-2000-2300-K1-S

2~2.3GHz, 100W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~2.3GHz
Insertion Loss:	0.35dB max.
VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	± 0.2 dB max.
Phase Balance:	$\pm 3^\circ$ max.
Impedance:	50 Ω
Average Power:	100W

Mechanical


Size* ¹ :	45*40*10mm 1.772*1.575*0.394in
Connectors:	SMA Female
Mounting:	4- $\Phi 2.7$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

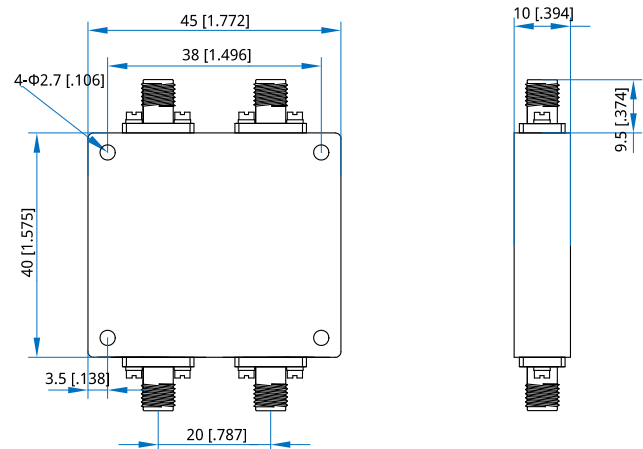

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QHC9-2000-2300-K1-S

Customization is available upon request.