

## QHC9-2000-8000-20-S

### 2~8GHz, 20W

#### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency:	2~8GHz
Insertion Loss:	0.8dB max.
VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	20W

#### Mechanical


Size* <sup>1</sup> :	60*25*11mm 2.36*0.99*0.43in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

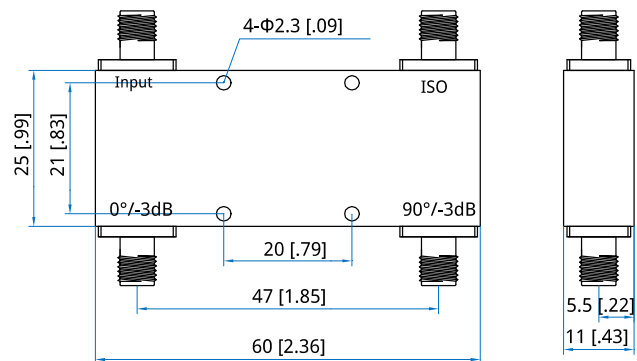

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QHC9-2000-8000-20-S**

Customization is available upon request.