

QHC9-3200-4000-30-S

3.2~4GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.2~4GHz
Insertion Loss:	0.5dB max.
Isolation:	20dB min.
VSWR:	1.3 max.
Amplitude Balance:	± 0.6 dB
Phase Balance:	$\pm 2^\circ$
Average Power:	30W
Impedance:	50 Ω

Mechanical


Size ^{*1} :	45*17*11mm 1.772*0.669*0.433in
RF Connectors:	SMA Female
Mounting:	2- Φ 2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings

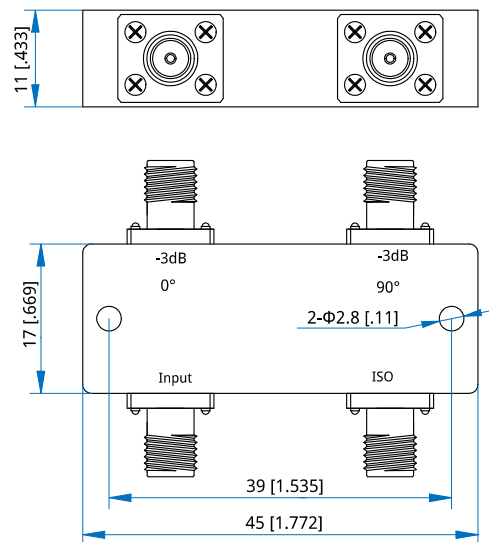

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QHC9-3200-4000-30-S

Customization is available upon request.