

QHM-75000-110000

75~110GHz

Features:

- * Low Conversion Loss
- * High Isolation

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Broadcast

Electrical

RF Frequency:	75~110GHz
RF Input Power:	+15dBm max.
LO Input Power:	+18dBm max.
IF Frequency:	DC~0.5GHz
Conversion Loss:	26dB typ.

Mechanical


Size*1:	55.8*33*20.1mm 2.197*1.299*0.791in
RF Connectors:	WR-10, UG-387/U
IF Connectors:	3.5mm Female
LO Connectors:	2.4mm Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

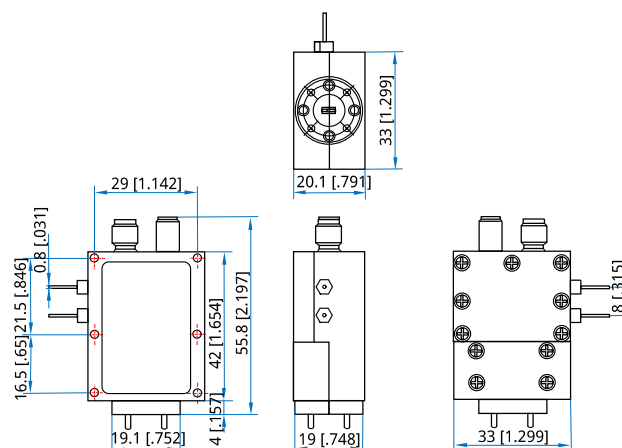

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHM-75000-110000

Customization is available upon request.