

QLF-18000-40

DC~18GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|------------------------|---|
| Frequency: | DC~18GHz |
| Stop Band Attenuation: | 40dBc@20~38GHz min. 60dBc@36GHz min. |
| Insertion Loss: | 2dB max. |
| VSWR: | 2 max. |

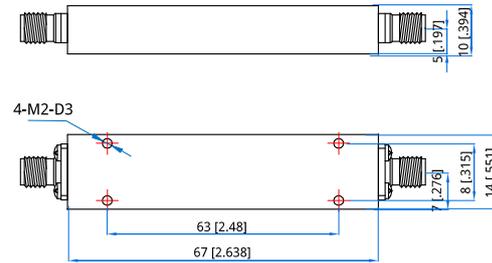
Mechanical

| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 67*14*10mm 2.638*0.551*0.394in |
| RF Connectors: | 2.92mm Female |
| Material: | Aluminum |
| Mounting: | 4-M2, depth 3mm |

[1] Exclude connectors.

Environmental

| | |
|------------------------|-----------|
| Operating Temperature: | -20~+55°C |
|------------------------|-----------|

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QLF-18000-40

Customization is available upon request.