

QLF-8000-40

DC~8GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~8GHz
Passband Insertion Loss:	2dB max.
VSWR:	2 max.
Stopband Attenuation:	40dB@9~25GHz min.

Mechanical

RF Connectors:	SMA Female
Mounting:	4- Φ 1.7mm through hole


Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

How To Order

QLF-8000-40

Customization is available upon request.

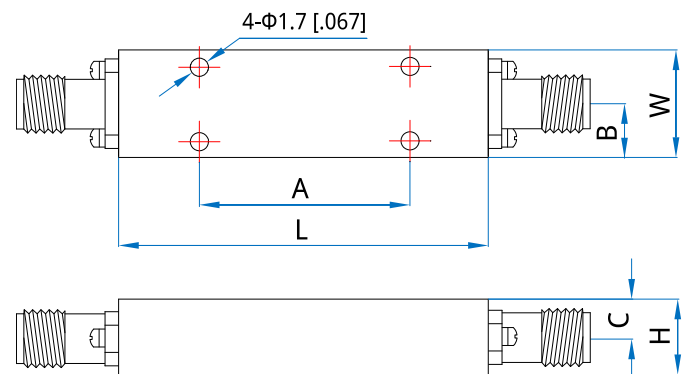

Size	L	W	H	A	B	C
mm	56.44	15	12.9	30	7.5	6.45
in	2.222	0.591	0.508	1.181	0.295	0.254

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

Outline Drawings